

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	02	E2	REVISED PER ECO-11-004917	11MAR11	RK HMR

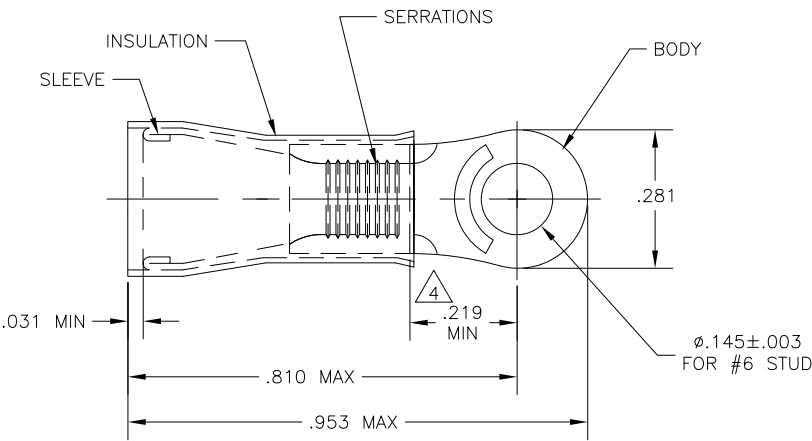

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

- 1 WIRE INSUL DIA .150-.230
- 2 MATERIAL: BODY - CU PER ASTM B152
SLEEVE - CU PER ASTM B152
INSULATION - NYLON (MIL-M-20693),
TYPE 1
- 3 FINISH: BODY & SLEEVE: TIN PER ASTM B-545
INSULATION - COLOR: YELLOW
- 4 APPLIES FROM THE EDGE OF METAL BARREL
TO THE CENTER OF THE STUD HOLE.

50	LOOSE PIECE, BOX	8-320634-2
2000	ON TAPE	2-320634-1
500	LOOSE PIECE	320634
QTY	PACKAGE TYPE	PART NO

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F] VOLTAGE RATING: 300 V MAX CIRCULAR MIL AREA: 2.62-6.64mm² [5,180-13,100] SOLID OR STRANDED	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr ruth 12JUN09	TE Connectivity NAME TOM MICHIELUTTI PRODUCT SPEC UL 486A APPLICATION SPEC														
	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK TOM MICHIELUTTI 12JUN09			APVD TOM MICHIELUTTI 12JUN09												
	<table border="1"> <tr><td>0 PLC</td><td>± .</td></tr> <tr><td>1 PLC</td><td>± .</td></tr> <tr><td>2 PLC</td><td>± .</td></tr> <tr><td>3 PLC</td><td>± .008</td></tr> <tr><td>4 PLC</td><td>± .</td></tr> <tr><td>ANGLES</td><td>± 5°</td></tr> </table>	0 PLC	± .	1 PLC	± .	2 PLC	± .	3 PLC	± .008	4 PLC	± .	ANGLES	± 5°		SIZE A3	CAGE CODE 00779	DRAWING NO C-320634	RESTRICTED TO
0 PLC	± .																	
1 PLC	± .																	
2 PLC	± .																	
3 PLC	± .008																	
4 PLC	± .																	
ANGLES	± 5°																	
MATERIAL 2	FINISH 3	WEIGHT -	CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1	REV E2											