


WIRE RANGE	E13288 Listed
22-16 AWG STRANDED	22-16 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

△ STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

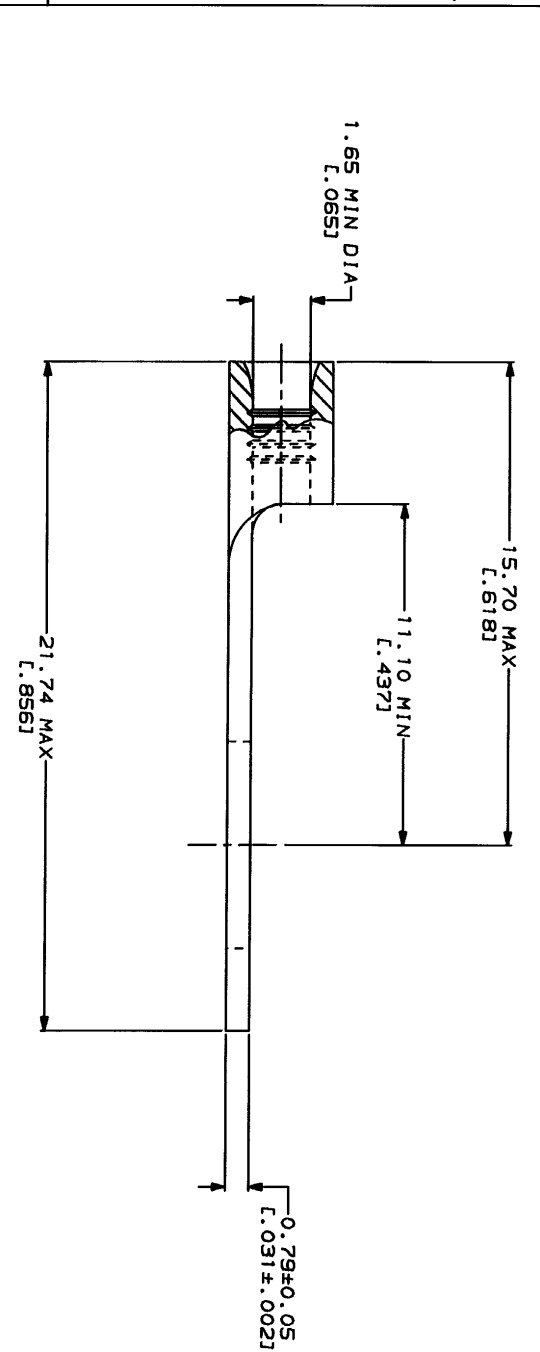

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION
1-800-722-1111

FOR ORDER ENTRY
1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX

VOLTAGE RATING: NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE: 0.26-1.65mm² [509-3,260] CIR MILS STRANDED

DO NOT SCALE PRINT. DIMENSIONS SPECIFIED IN PARENTHESES—TOLERANCES ON: 2 PLC DEC ± .001 3 PLC DEC ± .002

MATERIAL: COPPER PER ASTM B-152 ANNEALED

FINISH: TIN PLATE 0.0025AL.000100J MIN THK PER MIL-T-10727

DR TA BRINKMAN
CHK DA PATTERSON
APPD 2-3-93 DE MILLER
APPD 2-3-93 J.L. HICKLEY
PRODUCT SPEC

APPLICATION SPEC

WEIGHT

5000	ON TAPE	3-31173-3
---	LOOSE PIECE	31173
QUANTITY	PACKAGE TYPE	PART NO
AMP		
AMP Incorporated Harrisburg, PA 17105-3608		
TERMINAL, RING TONGUE, BUDGET		
SIZE	GAGE CODE	DRAWING NO
00779	00779	31173
SCALE	8:1	
CUSTOMER DRAWING		SHEET 1 OF 1