


REV	DATE	DESCRIPTION	BY	APP
1				
2				
3				
4				
5				
6	14	REVISED PER 0720-0230-93		



AMP	WIRE RANGE	UL E13288 Listed
	12-10 AWG STRANDED	12-10 AWG STRANDED
	LR7189 Certified	MILITARY P/N AND CLASS
	NOT CERTIFIED	NOT APPLICABLE

△ STAMP AMP 12-10* APPROX AS SHOWN

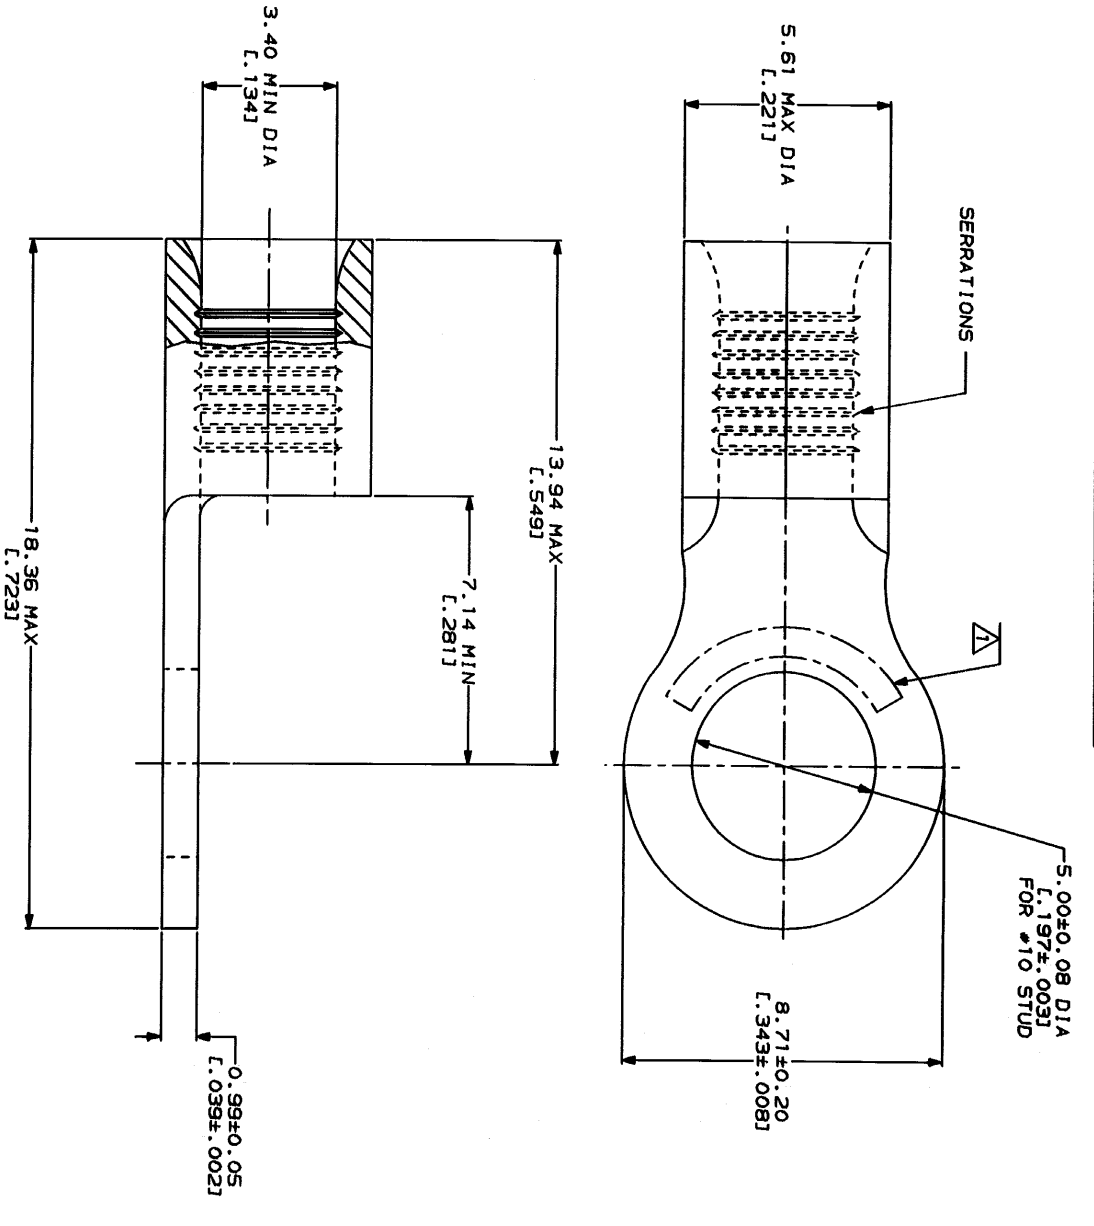

**AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: NOT APPLICABLE
FOR ORDER ENTRY	1-800-526-5142	WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm ² [5, 180-13, 100] CIR HILLS STRANDED

DO NOT SCALE PRINT. UNLESS SPECIFIED OTHERWISE DIMENSIONS ON THIS DRAWING ARE IN MILLIMETERS. FINISH: TIN PLATE 0.0025±L.0001(001) MIN THK PER MIL-T-10727

DR 2-9-83 TA BRINKMAN	DATE	32882
CHK 2-9-83 DA PATTERSON	DATE	
APPD 2-9-83 DE MILLER	DATE	
APPD 2-9-83 J. HICKLEY	DATE	
PRODUCT SPEC	NAME	AMP Incorporated Harrisburg, PA 17125-3608
APPLICATION SPEC	NAME	TERMINAL, RING TONGUE, BUDGET
WEIGHT	SIZE	CAGE CODE
	00779	00779
	SCALE 10:1	DRAWING NO
		32882
		SHEET
		1 OF 1

CUSTOMER DRAWING