

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
G	14	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D2		REVISED PER ECO-11-005027	12MAR11	RK	HMR

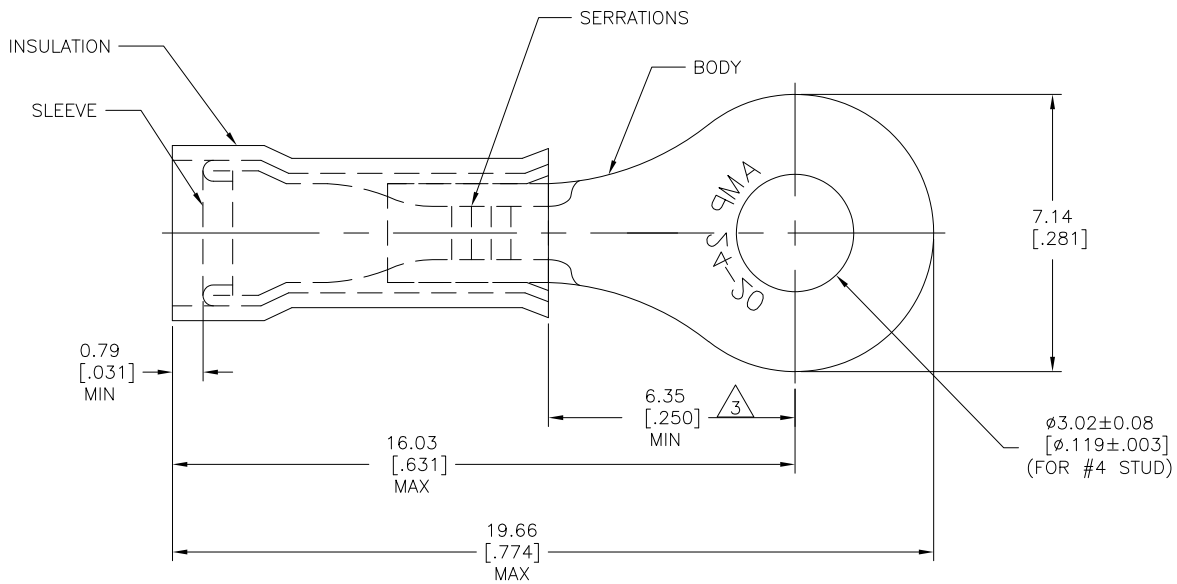

1 FOR 1.02[.040] TO 2.54[.100] WIRE INSULATION DIA

2 TONGUE MATERIAL THK 0.58±0.05[.023±.002]

3 APPLIES FROM EDGE OF METAL BARREL TO CENTERLINE OF STUD HOLE.

1	323985 ON TAPE	BODY&SLEEVE: COPPER ASTM-B152 TIN PL ASTM-B545	2-323985-1
1	WIRE TERMINAL	INSULATION: NATURAL NYLON ASTM-D4066 TYPE I	323985
QTY	DESCRIPTION	MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 19MAR10 RAGHAVENDRA	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK 19MAR10 JEFF RUTH	APVD 19MAR10 TOM MICHIELUTTI	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME TERMINAL, NYLON - PIDG - RING TONGUE WIRE SIZE: 24-20		
0 PLC ± -		PRODUCT SPEC		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± -		SIZE CAGE CODE DRAWING NO		
3 PLC ± 0.20 [.008]		A3 00779 C-323985		
4 PLC ± -		RESTRICTED TO		
ANGLES ± 0° 30'		WEIGHT		
MATERIAL SEE TABLE	FINISH SEE TABLE	CUSTOMER DRAWING		
		SCALE 10:1	SHEET 1 of 1	REV D2