
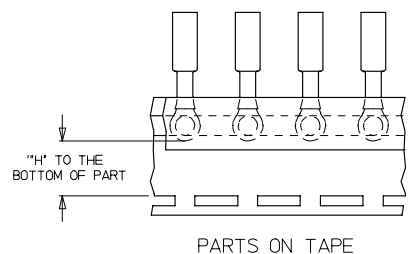


MATERIAL NUMBER	ENGINEERING NUMBER	MATERIAL NUMBER ON TAPE	ENGINEERING NUMBER ON TAPE	STUD SIZE	"S" ±.005/0.03	"D" MAX	"H" ±.020/0.50	"L" MAX
191640060	SC-228-04	191640936	SC-228-04T	#4	.126/3.20	.39/9.9	Ø.469/11.91	1.39/35.1
191640061	SC-228-06	191640937	SC-228-06T	#6	.146/3.71	.39/9.9	Ø.469/11.91	1.39/35.1
191640062	SC-228-08	191640938	SC-228-08T	#8	.173/4.39	.39/9.9	Ø.469/11.91	1.39/35.1
191640063	SC-228-10	191640939	SC-228-10T	#10	.198/5.03	.39/9.9	Ø.469/11.91	1.39/35.1
191640065	SC-230-10	191640316	SC-230-10T	#10	.198/5.03	.54/13.7	Ø.302/7.67	1.55/39.4
191640066	SC-230-14	191640317	SC-230-14T	1/4	.265/6.73	.54/13.7	Ø.302/7.67	1.55/39.4
191640067	SC-230-56	191640318	SC-230-56T	5/16	.328/8.33	.54/13.7	Ø.302/7.67	1.55/39.4
191640068	SC-240-38	191640857	SC-240-38T	3/8	.390/9.91	.60/15.2	Ø.385/9.78	1.55/39.4
191640058	SC-201-12	---	---	1/2	.515/13.08	.76/19.3	---	1.87/47.5

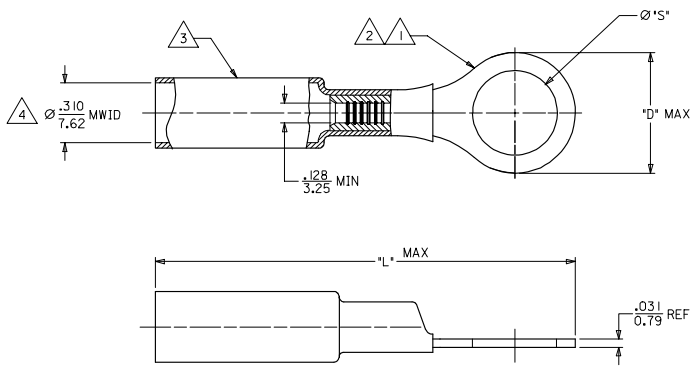

PARTS ON TAPE

# SALES DRAWING

- NOTES:
- ① TERMINAL MATERIAL: COPPER ALLOY
  - ② FINISH: ELECTRO TIN PLATE.
  - ③ INSULATION MATERIAL: HEAT SHRINKABLE TUBING WITH HOTMELT ADHESIVE INNER LINER. COLOR: YELLOW
  - ④ MWID = MAXIMUM WIRE INSULATION DIAMETER.
  - ⑤ PARTS ON TAPE DOUBLE SPACED.

ADD MATL NUMBER EC NO: ETC2005-0208 DRAWN BY: CK CHKD BY: RDR APPR: JPAW/CK	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		m/m	INCH	DRAWN BY	DATE	TITLE	RING TONGUE TERMINAL PERMA-SEAL NIAC 12-10 AWG	
REV	DESCRIPTION	4 PLACES ±---	±---	BENDERLE	2002/09/10	MOLEX INCORPORATED		
		3 PLACES ±---	±---	CHECKED BY	DATE			
		2 PLACES ±---	±---	HBEITZEL	2002/09/10	MATERIAL NO.	DOCUMENT NO.	SHEET NO.
		1 PLACE ±---	±---	APPROVED BY	DATE	SD-19164-041		1 OF 1
		ANGULAR ±---	°	RDEROSS	2002/09/10	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		