Downloaded from Elcodis.com electronic components distributor

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MILITARY PART NO. AND CLASS	STUD SIZE	DIMENSIONS in.				
			A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
PNF18-4R	------	#4	.77 (19.56)	.25 (6.35)	.20 (5.08)	.65 (16.51)	.12 (3.05)
**PNF18-4RN △6	MS25036-148 CLASS 1 & 2	#4	.73 (18.54)	.22 (5.59)	.19 (4.83)	.63 (16.00)	.12 (3.05)
PNF18-6R	MS25036-102 CLASS 1 & 2	#6	.77 (19.56)	.25 (6.35)	.20 (5.08)	.65 (16.51)	.15 (3.81)
PNF18-6RN	MS25036-101 CLASS 1 & 2	#6	.76 (19.30)	.22 (5.59)	.18 (4.57)	.63 (16.00)	.15 (3.81)
PNF18-8R	MS25036-149 CLASS 1 & 2	#8	.87 (22.10)	.31 (7.87)	.24 (6.10)	.72 (18.29)	.17 (4.32)
PNF18-10R	MS25036-103 CLASS 1 & 2	#10	.87 (22.10)	.32 (8.13)	.25 (6.35)	.72 (18.29)	.20 (5.08)
PNF18-14R	MS25036-150 CLASS 1 & 2	1/4"	1.08 (27.43)	.46 (11.68)	.38 (9.65)	.85 (21.59)	.27 (6.86)
PNF18-56R	MS25036-104 CLASS 1 & 2	5/16"	1.08 (27.43)	.46 (11.68)	.39 (9.91)	.85 (21.59)	.34 (8.64)
PNF18-38R	MS25036-105 CLASS 1 & 2	3/8"	1.16 (29.46)	.53 (13.46)	.41 (10.41)	.90 (22.86)	.40 (10.16)

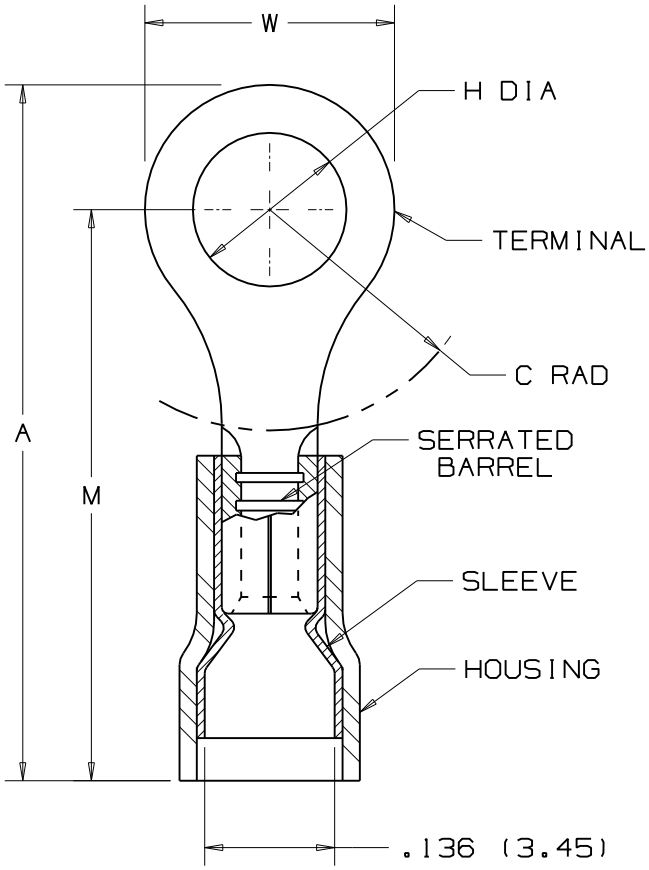

NOTES:

1) UL LISTED AND CSA CERTIFIED FOR:
   A. 600V. MAX. BLDG. WIRE
      (1000V. MAX. IN SIGNS, FIXTURES & LUMINARIES)
   B. 221°F. (105°C) MAX. TEMP. RATING

2) MATERIAL:
   A. STAMPING- .032" (.81) THK. COPPER, TIN PLATED
   B. HOUSING- NYLON, RED
   C. SLEEVE- BRASS, TIN PLATED

3) WIRE STRIP LENGTH- 7/32" +1/32,-0 (5.6, +.8,-0)

4) PACKAGE QUANTITY: -D = 500, -M = 1000

5) DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS

6) INSTALLATION TOOLS:
   A. UL LISTED AND CSA CERTIFIED: CT-100*, CT-250*, CT-400 (UL, MIL CLASS 2), CT-500, CT-1550, CT-1551
   B. PANDUIT APPROVED: CT-160*, CT-250*

LISTED 587H E52164

CERTIFIED LR31212

Panduit part numbers shown on this drawing meet the material requirements of RoHS (EUROPEAN DIRECTIVES 2002/95/EC) as proposed by the Technical Adaptation Committee

△6 * FOR USE WITH 22-18 AWG WIRE RANGE
** NOT UL LISTED OR CSA CERTIFIED

REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	PM
08	5/07	BCT	BCT	CORRECTED NYLON MATERIAL COLOR TO RED		LCA	TRO
07	8/06	DAW	DAW	ADDED MILITARY PART NUMBER & CLASS	TR00155	LCA	TRO
06	9/02	TC	SKB	ADD P/N PNF18-4RN & NOT UL LISTED NOTE	10416	TRO	LA
05	1/01	RM	SKB	FILESPEC WAS N41275AA_PCD_04	8933	JAC	CCH

PANDUIT CORP. TINLEY PARK, ILLINOIS

#22-18 BARREL NYLON INSULATED, FUNNELED WIRE ENTRY RING TONGUE, .136 (3.45) DIA. MAX. WIRE INSULATION DIAMETER

DRAWN BY	CHK'D	SCALE	DRAWING NO
DAW	LM	NONE	A41275