



AMP PART NO	MATERIAL	PKG TYPE	QTY
8-36929-3	M/F 8-36929-0	BOX	25
8-36929-5	M/F 8-36929-0	SPL	5



REV	DATE	DESCRIPTION
1	07/20/93	REVISED & REDRAWN PER 0720-0037-93

AMP WIRE RANGE	IL E13288 Listed
3/0 AWG SOLID OR STRANDED	3/0 AWG SOLID OR STRANDED
● LR7189 Certified	MILITARY P/N AND CLASS
3/0 AWG SOLID OR STRANDED	NOT APPLICABLE

- △ STAMP AMP 3/0W* APPROX AS SHOWN
- △ STAMP 150 APPROX AS SHOWN
- 3 TONGUE MATERIAL THK: 2.31 ±0.08 [0.091 ±0.003]

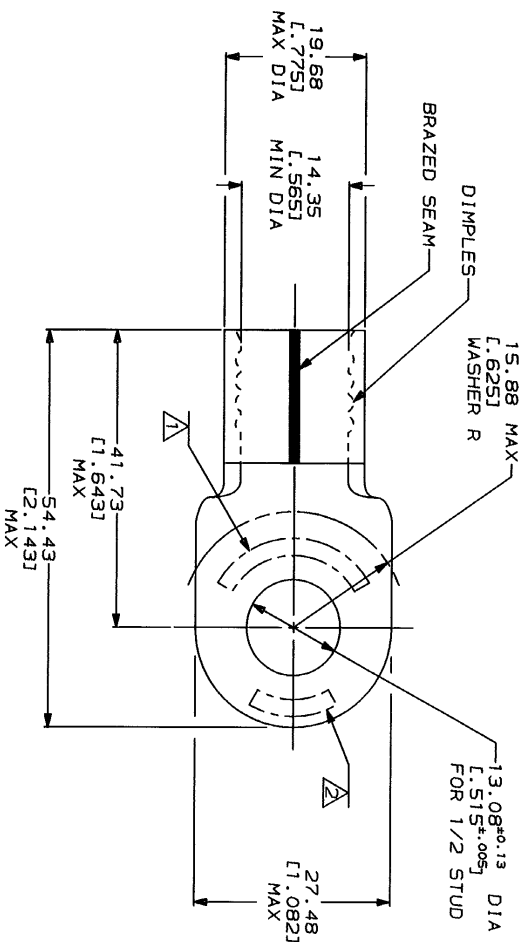

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX
VOLTAGE RATING: NOT APPLICABLE

DO NOT SCALE PRINT. DIMENSIONS SPECIFIED UNLESS SPECIFIED OTHERWISE. DIMENSIONS IN PARENTHESES ARE PER MIL DECIMALS. 2 P.L.C. DEC ± 0.201.0003 3 P.L.C. DEC ± . . . ANGLES ° - - MATERIAL COPPER ASTM B-152 ANNEALED

OR 5/20/93 DR SKRUM
CHK 1/27/94 RD HELM
APPD 1/27/94 RE ROSER
APPD 1/27/94 JL HECKLEY
PRODUCT SPEC

AMP Incorporated
Harrisburg, PA 17105-3808

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
PRODUCT INFORMATION CENTER
1-800-522-6752

CIRCULAR MIL AREA:
78-3-96, 3mm (150,000-190,000) CIR MILS
SOLID OR STRANDED

FINISH: TIN PLATE
0.002541.000100] MIN THK PER MIL-T-10727

APPLICATION SPEC

TERMINAL, RING TONGUE, SOLISTRAND™

FOR APPLICATION TOOLING INFORMATION
1-800-722-1111

TOOLING ASSISTANCE CENTER

FOR ORDER ENTRY
1-800-526-5142

WEIGHT

SCALE 2:1

AMP 1271-8 REV 3-92
03-FEB-94 16:55:23 092863 /file/09021123/dm1123.u.solidstrand/4.inl file
CUSTOMER DRAWING 1 OF 1

36929

36929
PART NO