

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

QTY	DESCRIPTION	PART NO
100	LOOSE PIECE, BOX	8-34080-1

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	G2	REVISED PER ECO-11-004820	11MAR11	RK HMR

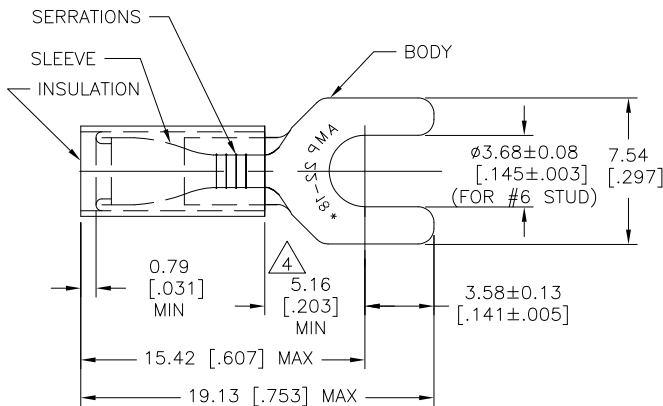

- 1 WIRE INSULATION DIA IS 2.03-3.18 [.080-.125].
- 2 TONGUE MATERIAL THICKNESS = 0.79±0.05 [.031±.002]
- 3 MARKING 22-18 FOR MILITARY
COMMERCIAL RANGE 22-16
- △4 APPLIES FROM METAL EDGE OF BARREL TO CENTER OF STUD.

1	34080 ON TAPE	BODY: COPPER (ASTM-B152) TIN PL (ASTM-B545) SLEEVE: COPPER (ASTM-B152) TIN PL (ASTM-B545)	2-34080-1
1	WIRE TERMINAL	INSULATION: NYLON COLOR: RED	34080
QTY	DESCRIPTION	MATERIAL & FINISH	PART NO

CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING
TEMPERATURE:

105°C [221° F]

VOLTAGE RATING:

300V MAX

CIRCULAR MIL AREA:

1.04-2.62mm² [2,050-5,180]
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm [INCHES]



MATERIAL

SEE TABLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.20[.008]
4 PLC ± -
ANGLES ± .5°

FINISH

SEE TABLE

DWN

RAGHAVENDRA

03JUL09

CHK

JEFF RUTH

03JUL09

APVD

JEFF RUTH

03JUL09

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

NAME

JEFF RUTH

03JUL09

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

WIRE-TERMINAL
PIDG-SPADE WIRE SIZE: 22-16

SIZE

A3

CAGE CODE

00779

DRAWING NO

C-34080

RESTRICTED TO

SCALE 5:1

SHEET 1 OF 1

REV G2