

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14				
	G2	REVISED PER ECO-11-004820	11MAR11	RK	HMR

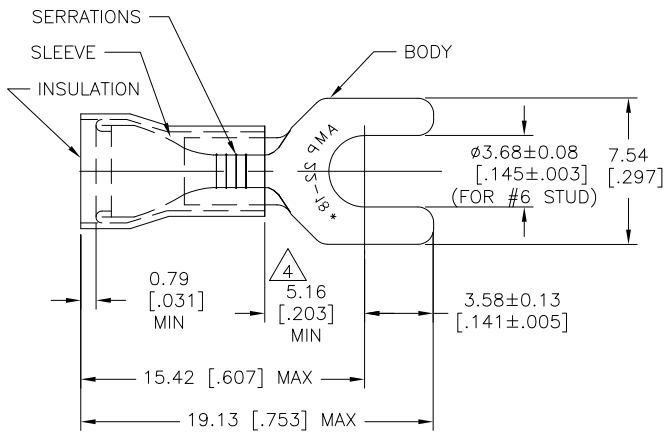

- 1 TONGUE MATERIAL THICKNESS = 0.79 ± 0.05 [0.031 ± 0.002]
 - 2 FOR 2.67[.105] TO 3.56[.140] WIRE INSULATION DIA
 - 3 MARKING 22-18 FOR MILITARY COMMERCIAL RANGE 22-16
- △ APPLIES FROM METAL EDGE OF BARREL TO CENTERLINE OF STUD

100	LOOSE PIECE, BOX	BODY: COPPER (ASTM-B152) TIN PL (ASTM-B545)	8-326861-1
1	326861 ON TAPE	SLEEVE: COPPER (ASTM-B152) TIN PL (ASTM-B545)	2-326861-1
1	WIRE TERMINAL	INSULATION: NYLON COLOR: RED	326861
QTY	DESCRIPTION	MATERIAL & FINISH	PART NO

CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221° F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 15JUL09	TE Connectivity	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 300V MAX	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK TOM MICHIELUTTI 15JUL09	NAME WIRE-TERMINAL PIDG-SPADE WIRE SIZE: 22-16	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 1.04-2.62mm ² [2,050-5,180] SOLID OR STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.20[.008] 4 PLC ± - ANGLES ± .5°	APVD TOM MICHIELUTTI 15JUL09	SIZE A3	CAGE CODE 00779
FOR ORDER ENTRY	1-800-526-5142		SEE TABLE	SEE TABLE	PRODUCT SPEC	DRAWING NO C-326861	RESTRICTED TO
					WEIGHT	SCALE 5:1	SHEET 1 of 1
					CUSTOMER DRAWING		REV G2

1470-19 (3/11)