


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 1993.
 © COPYRIGHT 1993 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPO
G	14					REV, RDRW, & SM PKG PER 0720-0040-93	3-28-93	38 DAP

METRIC
 DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	UL E13288 Listed
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
16-14 AWG SOLID OR STRANDED	NOT APPLICABLE

⚠ STAMP 8S AMP 16-14* APPROX AS SHOWN
 8S INDICATES STUD SIZE

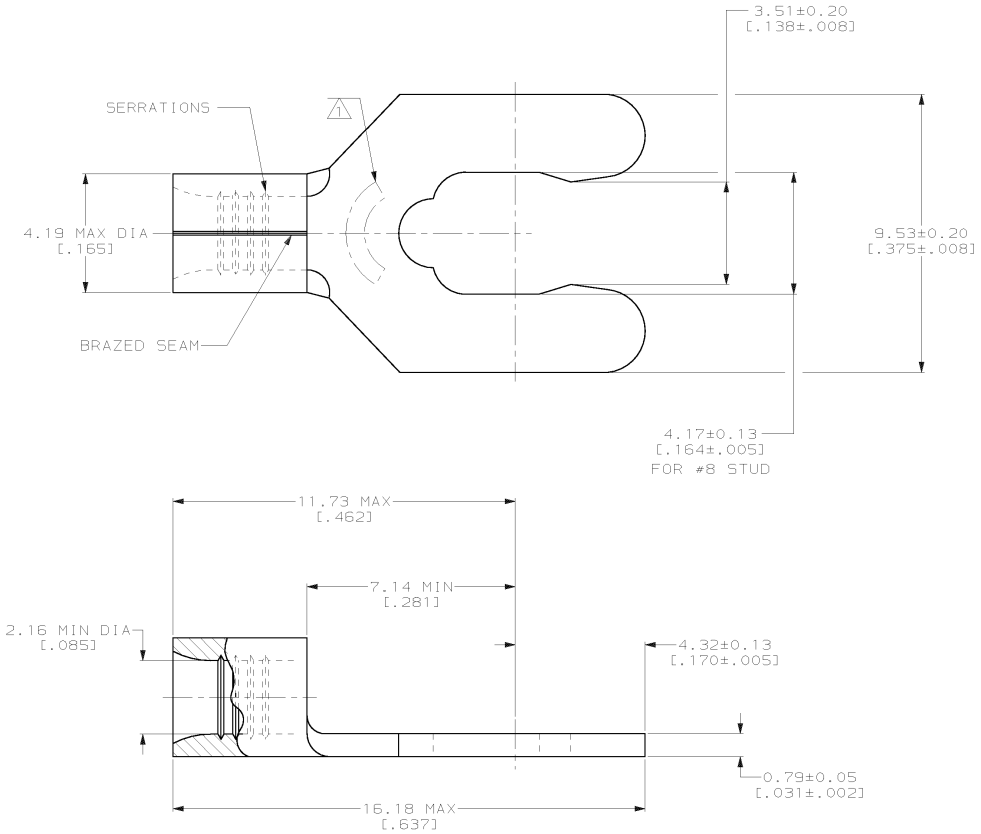

QUANTITY	PACKAGING TYPE	PART NO
100	LOOSE PIECE, BOX	8-53124-1
BULK	LOOSE PIECE	8-53124-0
5000	ON TAPE	53124-2
---	LOOSE PIECE	53124-1

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX
VOLTAGE RATING: NOT APPLICABLE
WIRE CROSS SECTIONAL AREA RANGE: 1.04-2.62mm² [2,050-5,180] CIR MILS SOLID OR STRANDED
THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLG DEC ± - 3 PLG DEC ± - ANGLES ± -
MATERIAL PHOSPHOR BRONZE PER ASTM B-103 ANNEALED
FINISH TIN PLATE 0.00254 [1.000100] MIN THK PER MIL-T-10727

DR 3-29-93 TA BRINKMAN
CHK 3-29-93 DA PATTERSON
APPD 3-29-93 DE MILLER
APPD 3-29-93 JL MECKLEY
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

AMP AMP Incorporated Harrisburg, PA 17105-3608		
NAME TERMINAL, SHORT SPRING SPADE, SOLISTRAND™		
SIZE C	CAGE CODE 00779	DRAWING NO C-53124
SCALE 10:1	SHEET 1 OF 1	

AMP 1471-B REV 3-92
 20-MAR-00 10:36:34 amp13469 /home/amp13469/edmod

CUSTOMER DRAWING