

±.001

**NOTES:**


- ① MAT'L: COPPER (STOCK TKN.  $\frac{.031}{.79}$ )
- ② PLATING: ELECTRO TIN (.0003 MIN)
- ③ TIN-PLATED BRASS FUNNEL FERRULE
- ④ NYLON INSULATION (COLOR CODED BLUE)  $\frac{.081}{206}$  MIN.

STUD SIZES: ( $\pm .005$ )

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING # E32244  
 "CSA" LISTING # 18689

WIRE SIZE: 16 - 14 AWG<sup>2</sup>  
 10 - 25 MM<sup>2</sup>

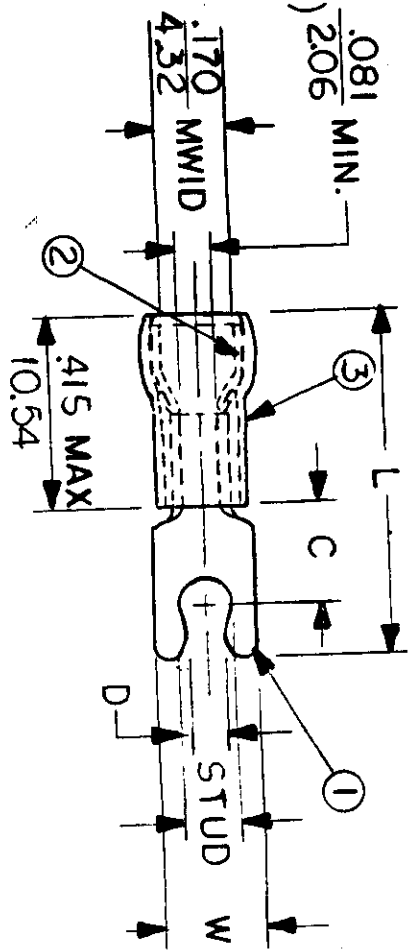

ALL DIMENSIONS = INCHES (MM) (MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"D" ±.005	AVAILABLE STUD SIZES	DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		REFERENCE	SCALE: NTS	DATE	TITLE:	DWG. NO.	CUSTOMER DWG
						DEC. ±	ANG. ±						
BB-8707	.250 6.35	.230 5.84	.825 20.96	1.05 2.67	05 ( $\frac{.127 \pm .005}{3.23}$ )					11-9-84	SNAP SPADE SHORT TONGUE TERMINAL AVIKRIMP 800-SERIES	A	
BB-8707-	.250 6.35	.230 5.84	.825 20.96	1.14 2.90	06					11-29-84			

