

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14				
	G1	REV PER ECR 09-023200	27OCT09	JR	TM

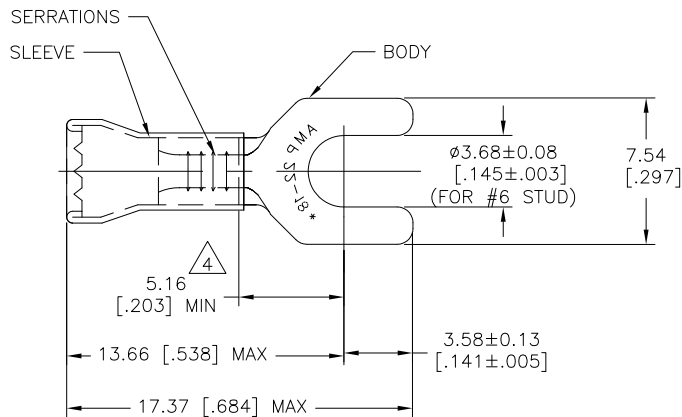

- 1 TONGUE MATERIAL THICKNESS = 0.79 ± 0.05 [$.031 \pm .002$]
- 2 FOR 2.67[.105] TO 3.56[.140] WIRE INSULATION DIA
- 3 MARKING 22-18 FOR MILITARY COMMERCIAL RANGE 22-16
- 4 APPLIES FROM EDGE OF METAL BARREL TO THE CENTER OF THE STUD HOLE.
- 5 MAX OPERATING TEMP: 343°C
- 6 CMA: 0.26-1.65mm² [509-3,260]

OBSOLETE	1	33799 ON TAPE	BODY: COPPER (ASTM-B152) NICKEL PL (ASTM-B545) SLEEVE: NICKEL SILVER NO PLATING	2-33799-1
	1	WIRE TERMINAL		33799
	QTY	DESCRIPTION	MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 15JUL09	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK TOM MICHIELUTTI 15JUL09	NAME TOM MICHIELUTTI	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD TOM MICHIELUTTI 15JUL09	PRODUCT SPEC ---	
0 PLC ± -		APPLICATION SPEC ---		
1 PLC ± -		SIZE A3		
2 PLC ± -		CAGE CODE 00779		
3 PLC ± 0.20[.008]		DRAWING NO C-33799		
4 PLC ± -		RESTRICTED TO ---		
ANGLES ± .5°		WEIGHT ---		
MATERIAL SEE TABLE	FINISH SEE TABLE	CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV G1