THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART NUMBER | STUD SIZE | DIMENSIONS in. | | | | |
|---|---|---|---|---|---|---|
| | | A ±.03 | W ±.01 | C ±.02 | M ±.03 | H ±.01 |
| PNF18-6LFW | #6 | .85 (21,6) | .29 (7,4) | .20 (5,1) | .63 (16,0) | .15 (3,8) |
| PNF18-6LF | #6 | .82 (20,8) | .27 (6,9) | .20 (5,1) | .63 (16,0) | .15 (3,8) |
| PNF18-8LF | #8 | .89 (22,6) | .29 (7,4) | .26 (6,6) | .68 (17,3) | .16 (4,1) |
| PNF18-10LF | #10 | .89 (22,6) | .33 (8,4) | .25 (6,4) | .68 (17,3) | .19 (4,8) |

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
   A. 600 V MAX VOLTAGE RATING
      (1000V. MAX. IN SIGNS,FIXTURES & LUMINARIES)
   B. TEMPERATURE RATING OF INSULATION:
      105°C(221°F)
   C. #22-18 AWG SOLID OR STRANDED, COPPER WIRE

2. PACKAGE QUANTITY:
   A. STD: C=100
   B. BULK: M=1000

3. MATERIAL:
   A. STAMPING: .032 (,81) THK COPPER, TIN PLATED
   B. HOUSING: RED NYLON
   C. SLEEVE: BRASS, TIN PLATED

4. WIRE STRIP LENGTH: $7/32\ ^{+1/32}_{-0}$ $(5,6\ ^{+,8}_{-0})$

5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

6. INSTALLATION TOOLS:
   A. UL LISTED AND CSA CERTIFIED WITH:
      CT-100, CT-400(U.L. ONLY), CT-1550 & CT-1551.
   B. PANDUIT APPROVED: CT-160, CT-260

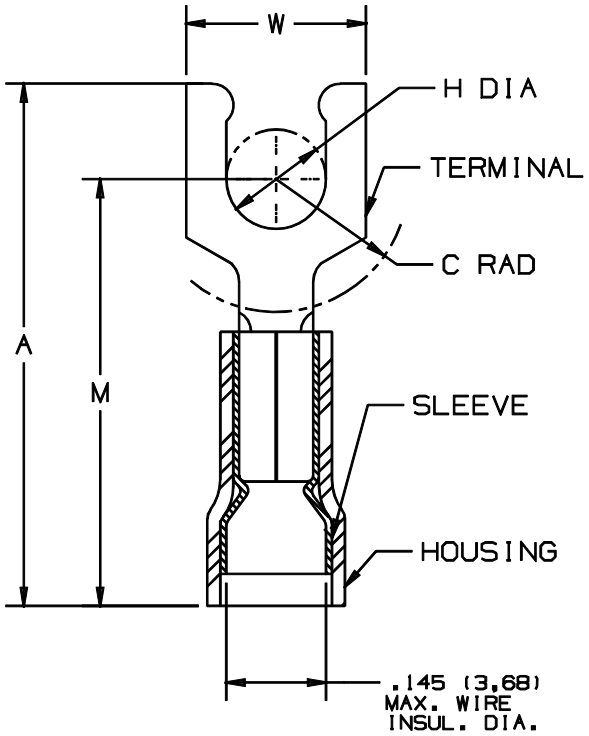


LISTED
587H
E52164

CERTIFIED
LR31212

A41056_05

| REV | DATE | BY | CHK | DESCRIPTION | ECN# | QA | CUST | PM | APP |
|---|---|---|---|---|---|---|---|---|---|
| 05 | 1-01 | EJS | | UPDATED NOTE 1-B, REMOVED INSTALLATION TOOLS CT-500,CT-550 FROM NOTE 6,REMOVED NOTE "• APPROVED FOR EXPANDED WIRE RANGE #22-16 AWG. | | | | | |
| | | | | FILE SPEC #AS N41056AA_PCD_04,METRIC NUMBERS HERE 2 PLACES | | | | | |
| 04 | 3-95 | MS | RLS | UPDATED NOTES AND DIMENSIONS | 03050 | | LA | KS | |
| 03 | 3-91 | DL | JC | REDRAWN ON CAD | ----- | | LA | KS | |

PANDUIT CORP. TINLEY PARK, ILLINOIS

#22-18 LOCKING FORK NYLON INSUL FUNNEL WIRE ENTRY .145 (3,68) MAX WIRE INSUL DIA.

| DRAWN BY | CHK'D | SCALE | DRAWING NO. |
|---|---|---|---|
| DRL | LA | NONE | A41056 |

Downloaded from Elcodis.com electronic components distributor