


DRAWING MADE IN THIRD ANGLE PROJECTION  
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	REVISIONS	DATE	APPD
AF	50					E ADD -2 PER 0L10-0469-97		

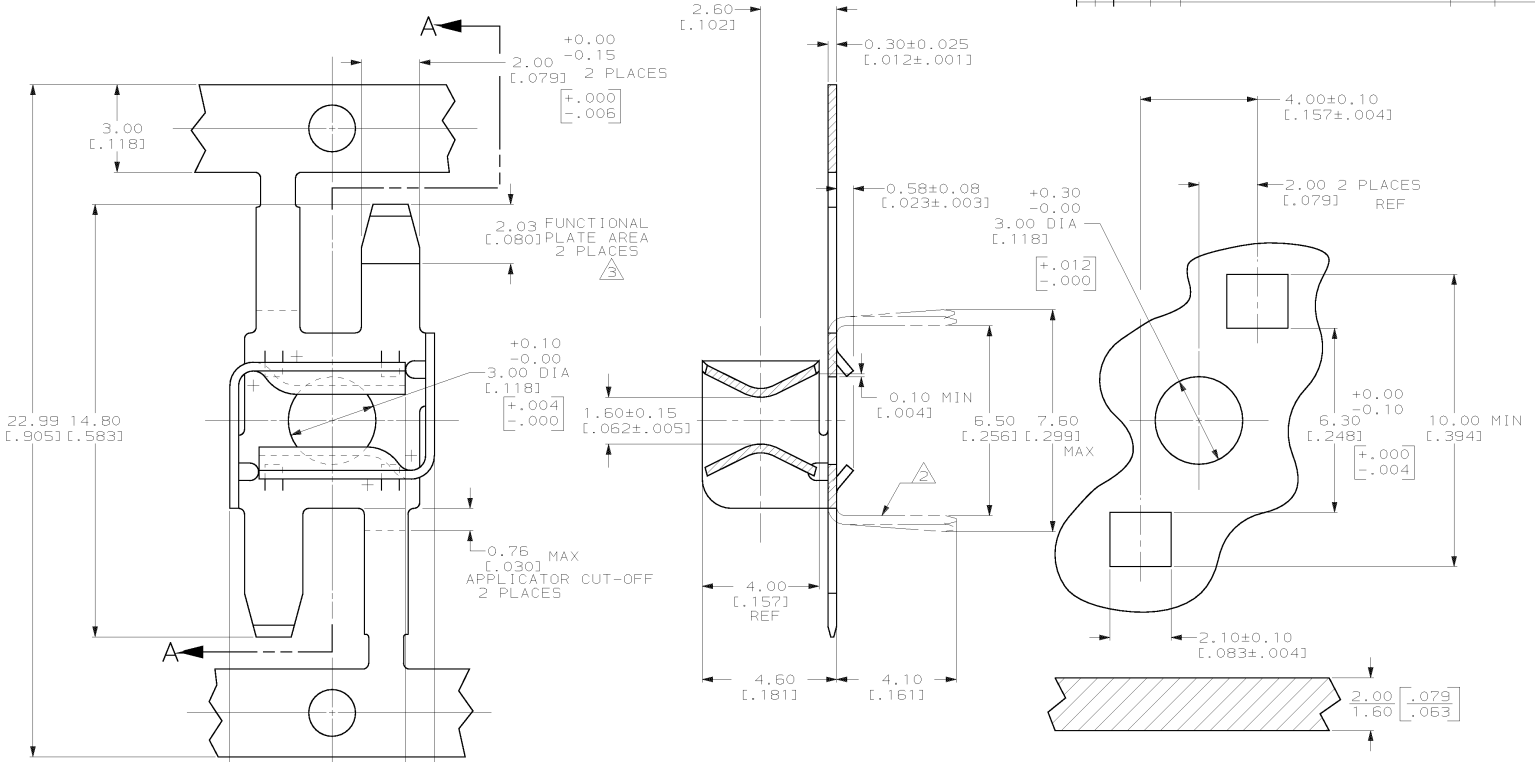

- 1 CONTINUOUS STRIP ON REELS.
- 2 TIMES BENT 90° IN APPLICATOR PRIOR TO ASSEMBLY INTO P.C. BOARD.
- 3 0.00508 [0.00200] MIN TIN IN FUNCTIONAL PLATE AREA, 0.00254 [0.00100] MIN TIN ON REMAINDER.
- 4 PRODUCT COMPLIES WITH AMP SOLDERABILITY SPEC 109-11-5, WHEN PLATED AND 109-11-1 AFTER TWO YEARS OF SHELF LIFE

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON :		DR 2/2/90 MICHAEL S. FEHER	TRAVERSE WOUND 63566-2	
1 PLC DEC ± .		CHK 2/5/90 JR RUTH	NORMAL 63566-1	
2 PLC DEC ± .		APPD 2/13/90 D. SCHMCK	REELING PART NO	
3 PLC DEC ± 0.25 (.010) ANGLES ± 1°		APPD 2/19/90 TERRY L. SHUTTER	AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL #4 HARD PHOSPHOR BRONZE		PRODUCT SPEC -	NAME PIN RECEPTACLE, PRINTED CIRCUIT BOARD, 2.25 [0.088]-2.36 [0.093] DIA	
FINISH		APPLICATION SPEC -	SIZE C	CAGE CODE 00779
WEIGHT			DRAWING NO 63566	
			SCALE 10:1	SHEET 1 OF 1

CUSTOMER DRAWING