

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	G1	REVISED PER ECO-11-004917	11MAR11	RK HMR


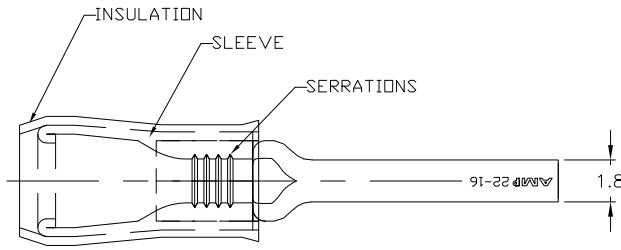


<b>AMP</b> WIRE RANGE	<b>FILE</b> E13288
22-16 AWG STRANDED	22-16 AWG STRANDED

1 WIRE INSULATION DIA.  
3.6 MAX

2 MATERIAL: BODY - CU PER ASTM B152  
SLEEVE - CU PER ASTM B152  
INSULATION - NYLON

3 FINISH: BODY - TIN PL ASTM B545  
SLEEVE - TIN PL ASTM B545  
INSULATION - COLOR -RED

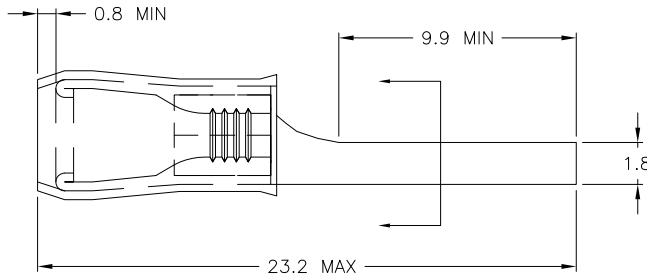

---	LOOSE PIECE	165168-0
QTY	PACKAGE TYPE	PART NO

CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 90°C [194°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 16AUG10	TE Connectivity	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -	DIMENSIONS: mm [INCHES]	1 1 PLC ± 0.38 [0.15] 2 1 PLC ± 0.20 [0.08] 3 1 PLC ± - 4 1 PLC ± -	CHK T MICHELUTTI 16AUG10	NAME	
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 0.25-1.6mm <sup>2</sup> [493-3158] STRANDED	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHELUTTI 16AUG10	TERMINAL, WIRE PIN, PIDG WIRE SIZE, 22-16 AWG	
TOOLING INFORMATION	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	MATERIAL	FINISH	PRODUCT SPEC	APPLICATION SPEC	RESTRICTED TO
FOR ORDER ENTRY	1-800-526-5142		2	3	WEIGHT	SIZE CAGE CODE DRAWING NO A3 00779 C-165168	---
CUSTOMER DRAWING					SCALE	6:1	SHEET 1 OF 1 REV G1

1470-19 (3/11)