

4

3



2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
G	86					
	B	REV PER ECR 10-007446	10AUG10	JR	TM	

- 1 170°C MAXIMUM OPERATING TEMPERATURE
- 2 STOCK 0.77±0.04 THK
- 3 WIRE CROSS SECTIONAL AREA RANGE:  
0.26-1.65mm<sup>2</sup> [509-3,260 CMA]  
SOLID OR STRANDED
- 4 PRELIMINARY - NOT FOR PRODUCTION

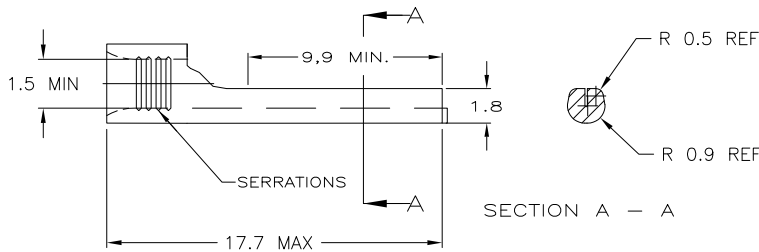

TAPE & REEL	TIN PLATED PER ASTM B-545 0.00254 MIN EXT THK	COPPER PER ASTM B-152, ANNEALED	2-165166-1
LOOSE PIECE	TIN PLATED PER ASTM B-545 0.00254 MIN EXT THK	COPPER PER ASTM B-152, ANNEALED	165166-0
PACKAGING	FINISH		MATERIAL
			PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		04DEC08		Tyco Electronics		Tyco Electronics Corporation	
DIMENSIONS:		CHK		04DEC08		T MICHELUTTI		Harrisburg, PA 17105-3608	
mm		APVD		04DEC08		T MICHELUTTI		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		-		-		PIDG WIRE PIN ( LONG )	
0 PLC	± -	APPLICATION SPEC		-		-		22-16	
1 PLC	± 0.2	WEIGHT		-		-		-	
2 PLC	± -	SIZE		A3		CAGE CODE		00779	
3 PLC	± -	DRAWING NO		C=165166		RESTRICTED TO		-	
4 PLC	± -	MATERIAL		-		CUSTOMER DRAWING		SCALE	
ANGLES	± -	FINISH		-		5:1		SHEET	
						1 of 1		REV	
								B	