

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - FGF ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	T2	REVISED PER ECO-11-004587	11MAR11	RK HMR

AMP WIRE RANGE	E13288	LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

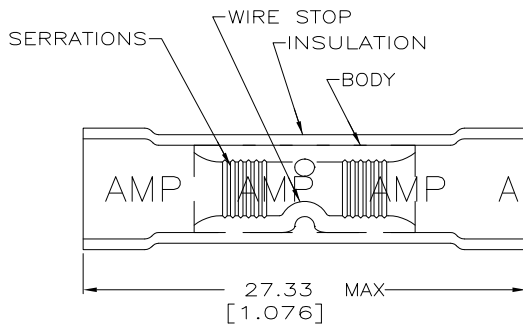

1. WIRE INSUL DIA,  
2.67-3.56 [.105-.140]  
 PRELIMINARY - NOT FOR PRODUCTION.

10,000	LOOSE PIECE, BULK	34070-3
50	LOOSE PIECE, BAG	8-34070-5
5	LOOSE PIECE, BLS	8-34070-4
100	LOOSE PIECE, BOX	8-34070-1
2500	ON TAPE, REEL	1-34070-1
1000	LOOSE PIECE	34070
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 90° C [194° F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M ELLIS 19JUL95	TE Connectivity		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX 1000V (FIXTURES OR SIGNS)	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	CHK C PRESNELL 19JUL95	APVD S BORTNER 19JUL95	NAME UL486A	RESTRICTED TO
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 0.26mm <sup>2</sup> -1.65mm <sup>2</sup> [509-3260]		MATERIAL BODY, CU ASTM B 152 SLV, PVC, COLOR, RED	FINISH TIN PLATE PER MIL-T-10727	PRODUCT SPEC UL486A	APPLICATION SPEC	SIZE A3
FOR ORDER ENTRY	1-800-526-5142					WEIGHT	CAGE CODE 00779	DRAWING NO C-34070
CUSTOMER DRAWING						SCALE 4:1	SHEET 1 of 1	REV T2

1470-19 (3/11)