

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.



| LOC | DIST | REVISIONS                 |         |     |      |
|-----|------|---------------------------|---------|-----|------|
| P   | LTR  | DESCRIPTION               | DATE    | DWN | APVD |
| G   | 14   |                           |         |     |      |
|     | Y1   | REVISED PER ECO-11-004917 | 11MAR11 | RK  | HMR  |



STAMPING DETAIL

- △1 FOR 9.14 [.360] MAX WIRE INSULATION DIA
- △2 MATERIAL: BODY; COPPER PER ASTM B152 INSULATION; PVC COLOR; PURPLE
- △3 FINISH: BODY; TIN PL. PER ASTM B545

|                                |                                |                                |
|--------------------------------|--------------------------------|--------------------------------|
| <b>AMP</b><br>WIRE RANGE       | Listed                         | LR7189 Certified               |
| 22-10 AWG<br>SOLID OR STRANDED | 22-10 AWG<br>SOLID OR STRANDED | 22-10 AWG<br>SOLID OR STRANDED |

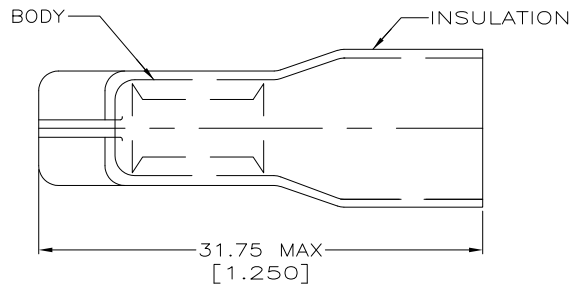

|      |              |            |
|------|--------------|------------|
| 100  | LOOSE PC,BOX | 8-321519-1 |
| 1500 | TAPE MOUNTED | 2-321519-2 |
| -    | LOOSE PIECE  | 321519     |
| QTY  | DESCRIPTION  | PART NO    |

|  |   |   |  |  |   |                  |                    |                        |                    |
|--|---|---|--|--|---|------------------|--------------------|------------------------|--------------------|
| <b>AMP INCORPORATED</b><br><b>CUSTOMER SERVICE SYSTEMS</b>   |   | MAX RECOMMENDED OPERATING TEMPERATURE:<br>105° C MAX                            | THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN G KRUPER 1/93<br>CHK R HERSEY 1/93<br>APVD M ELLIS 1/93 |                  |                    |                        |                    |
| FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS<br>PRODUCT INFORMATION CENTER<br>1-800-522-6752 | FOR APPLICATION TOOLING ASSISTANCE CENTER<br>TOOLING INFORMATION<br>1-800-722-1111  | VOLTAGE RATING:<br>600V MAX (BUILDING & WIRING)<br>1000V MAX (FIXTURES & SIGNS) | DIMENSIONS:<br>INCHES                  | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ± -<br>1 PLC ± -<br>2 PLC ± 0.20[.008]<br>3 PLC ± -<br>4 PLC ± -<br>ANGLES ± - | NAME<br>SPLICE, WIRE, CLOSED END                            | SIZE<br>A3       | CAGE CODE<br>00779 | DRAWING NO<br>C-321519 | RESTRICTED TO<br>- |
| FOR ORDER ENTRY<br>1-800-526-5142  | THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. |   | MATERIAL<br>                           | FINISH<br>   | WEIGHT<br>-   | CUSTOMER DRAWING | SCALE<br>4:1       | SHEET<br>1 OF 1        | REV<br>Y1          |