

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
P	LR	DESCRIPTION	DATE	BY
G	14	L1	REVISED PER ECO-11-004587	11MAR11
				RK HMR



- 1 STAMP AMP 8W* APPROX AS SHOWN
- 2 MAXIMUM LENGTH DOES NOT INCLUDE MANUFACTURING TABS
- 3 COPPER PER ASTM B-152 ANNEALED
- 4 UL LISTED E13288, 8 AWG STRANDED.
- 5 CSA CERTIFIED LR7189, 8 AWG SOLID OR STRANDED

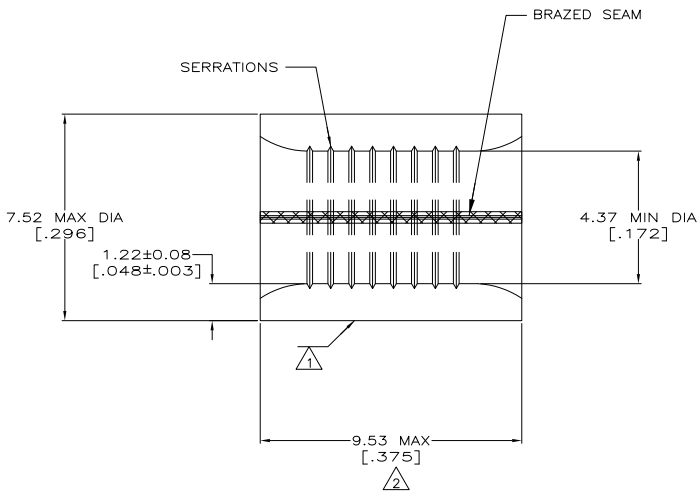

4 5	25	LOOSE PIECE BOX 34318	170° C	TIN PLATE 0.00254 [.000100] MIN THK PER MIL-T-10727	8-34318-3
4 5	1000	LOOSE PIECE BOX 34318	170° C	TIN PLATE 0.00254 [.000100] MIN THK PER MIL-T-10727	2-34318-3
---	---	LOOSE PIECE	343° C	NICKEL PLATE 0.01651 [.000650] MIN THK PER QQ-N-290	2-34318-1
---	---	LOOSE PIECE	170° C	TIN/LEAD (60/40) PLATE, 0.00254 [.000100] MIN THK PER SAE-AMS-P-81728	34318-1
4 5	---	LOOSE PIECE	170° C	TIN PLATE 0.00254 [.000100] MIN THK PER MIL-T-10727	34318
APPROVALS	---	LOOSE PIECE	MAX OPERATING TEMP	FINISH	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: SEE TABLE
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: N/A
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 6.64-10.5mm ² [13,100-20,800] SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	BY
DIMENSIONS: INCHES	TECHNICAL SERVICES OTHERWISE SPECIFIED	4-5-93	TA BRINKMAN
MATERIAL FINISH	SEE TABLE	4-5-93	DA PATTERSON
		4-5-93	DA PATTERSON
APPLICATION SPEC		SIZE	CAGE CODE
WEIGHT		A2	00779
CUSTOMER DRAWING		SCALE	10:1
		SHEET	1 of 1
		REV	L1

1471-9 (3/11)

34318

A