

4

3



2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL RIGHTS RESERVED. © COPYRIGHT 19

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	K	REV / 0720-0584-95	11APR95	MLE SB

WIRE RANGE	E13288	LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

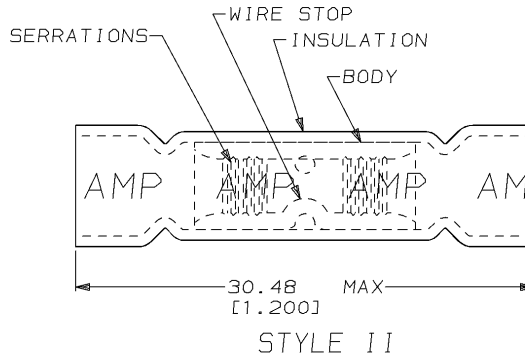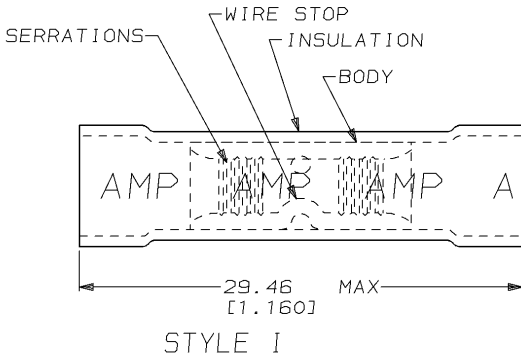

1. WIRE INSUL DIA,
3.81-6.35 [1.50-.250]

STYLE	QTY	PACKAGE TYPE	PART NO
I	50	LOOSE PIECE, BOX	8-34945-2
II	2000	ON TAPE, REEL	2-34945-2
II	500	LOOSE PIECE	2-34945-1
I	500	LOOSE PIECE	34945

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 90°C [194°F]	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN M ELLIS 03APR95	AMP Incorporated Harrisburg, PA 17105-3608
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX 1000V (FIXTURES OR SIGNS)	DIMENSIONS: mm [in]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	CHK C PRESNELL 03APR95	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 2.62mm² - 6.64mm² [S180-13100]	MATERIAL BODY, CU ASTM B 152 PVC, COLOR, YELLOW	FINISH TIN PLATE PER MIL-T-10727	APVD S BORTNER 03APR95	SIZE A3
FOR ORDER ENTRY	1-800-526-5142				WEIGHT -	CAGE CODE 00779
AMP 1470-19 REV 09MAY94					DRAWING NO C-34945	
					SCALE 4:1	
					SHEET 1 OF 1	
					REV K	

AMP 1470-19 REV 09MAY94
10 APR 1995 16:25:20 AMP10390 <UJ128A>DEPT1132>AMP10398>U.SPLR6BUTT