

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	E1	REVISED PER ECO-10-025937	21DEC10	HMR DR

- 1 STAMP AMP 22-18* APPROX AS SHOWN
- 2 WIRE INSULATION .170 DIA MAX.
- 3 PRELIMINARY - NOT FOR PRODUCTION

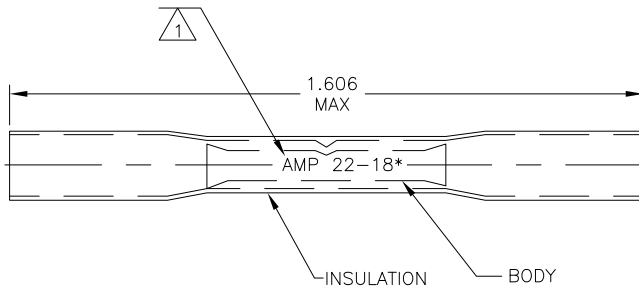

AMP WIRE RANGE
22-18 AWG STRANDED

2500	ON TAPE, REEL	3	2-55824-1
50	LOOSE PIECE		8-55824-2
1000	LOOSE PIECE		55824-1
QTY	PACKAGE TYPE		PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 125° C MAX	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S S GOULDEN 6/93	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
			DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK R HERSEY 6/93	NAME SPLICE, SEALABLE HEAT SHRINKABLE			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX (BUILDING WIRING) 1000V MAX (FIXTURES & SIGNS)		0 PLC ± -	APVD B BARE 6/93	PRODUCT SPEC			
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 0.26-0.96mm ² [509-1900] STRANDED		1 PLC ± -	APPLICATION SPEC	SIZE A3			
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	MATERIAL BODY: ETP COPPER INSULATION: POLYOLEFIN COLOR: RED	2 PLC ± .008	WEIGHT -	CAGE CODE 00779	DRAWING NO C-55824	RESTRICTED TO -	
			FINISH EDP TIN PLATED	3 PLC ± -	CUSTOMER DRAWING		SCALE NTS	SHEET 1 OF 1	REV E1
			4 PLC ± -						
			ANGLES ± -						