


10	9	8	7	6	5	4	3	2	19430
MATERIAL NUMBER	ENGINEERING NUMBER	COLOR INSERT	SOLID WIRE RANGE AWG	PORTS	DIM A	DIM B	DIM C		
194300001	19430-0001	RED	12-22	2	.37/9.5	.41/10.5	.77/19.5		
194300002	19430-0002	ORANGE	12-22	3	.37/9.5	.53/13.5	.78/19.7		
194300003	19430-0003	YELLOW	12-22	4	.37/9.5	.68/17.2	.78/19.7		
194300004	19430-0004	GRAY	12-22	5	.37/9.5	.83/21.1	.78/19.7		
194300005	19430-0005	BLACK	12-22	8	.66/16.8	.69/17.5	.75/19.0		

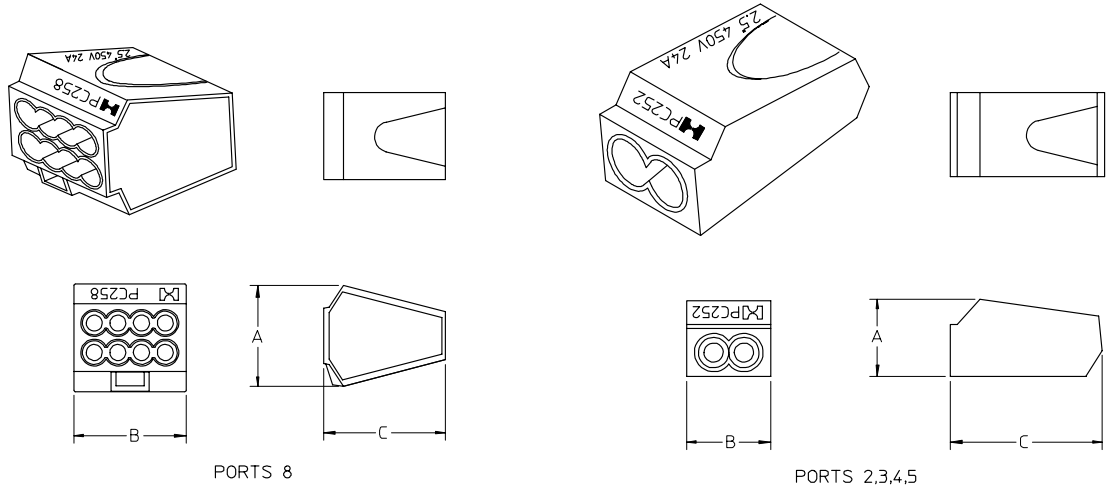

REF NOTES:

- 1.) CURRENT: 24A(VDE)
- 2.) VOLTAGE: UL-600V, VDE-450V
- 3.) WORKING TEMP: -30°C TO 105°C
- 4.) HOUSING MATERIAL: UL 94V-2
FLAME RETARDANT THERMOPLASTIC
- 5.) WIRE STRIP LENGTH: APPROX. .45/11.0
- 6.) UL FILE NO. PENDING.
- 7.) INTERNATIONAL APPROVALS: CE, VDE, FIMKO, KEMA, CEBEC

EC NO: ETC2005-0065 DRWN: ILOMASTR2004/09/28 CHYD: 2004/09/28 APPR: RDEROSS 2004/09/28	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY															
	▽ -0 ▽ -0	<table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± .---</td> <td>± .---</td> </tr> <tr> <td>3 PLACES</td> <td>± .---</td> <td>± .---</td> </tr> <tr> <td>2 PLACES</td> <td>± .---</td> <td>± .020</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.51</td> <td>± .---</td> </tr> </table>		mm	INCH	4 PLACES	± .---	± .---	3 PLACES	± .---	± .---	2 PLACES	± .---	± .020	1 PLACE	± 0.51	± .---	DIMENSION STYLE IN/MM	TITLE	PUSH-IN WIRE CONNECTOR 12-22AWG	
			mm	INCH																	
		4 PLACES	± .---	± .---																	
3 PLACES	± .---	± .---																			
2 PLACES	± .---	± .020																			
1 PLACE	± 0.51	± .---																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY B.RUPERT DATE 11/13/03 CHECKED BY J.PAWLIC DATE 11/13/03 APPROVED BY R.DEROSS DATE 11/13/03	MOLEX INCORPORATED MATERIAL NO. SEE CHART DOCUMENT NO. SD-19430-001 SHEET NO. 1 OF 1																			
REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																				