


6	5	4	3	2	1
MATERIAL NO.	ENGINEERING P/N	TOTAL CIRCULAR MILL AREA (CMA)	COLOR CODE	ØA MIN	LENGTH "L" ± .025 / 0.64
191640162	SSC-2624	450 MIN / 1500 MAX	CLEAR	.065 / 1.7	1.025 / 26.0
191640163	SSC-2218	1250 MIN / 3500 MAX	RED	.105 / 2.7	1.655 / 42.0
191640164	SSC-1614	2500 MIN / 7200 MAX	BLUE	.180 / 4.5	1.655 / 42.0
191640165	SSC-1210	6100 MIN / 19000 MAX	YELLOW	.235 / 6.0	1.655 / 42.0

ⓓ

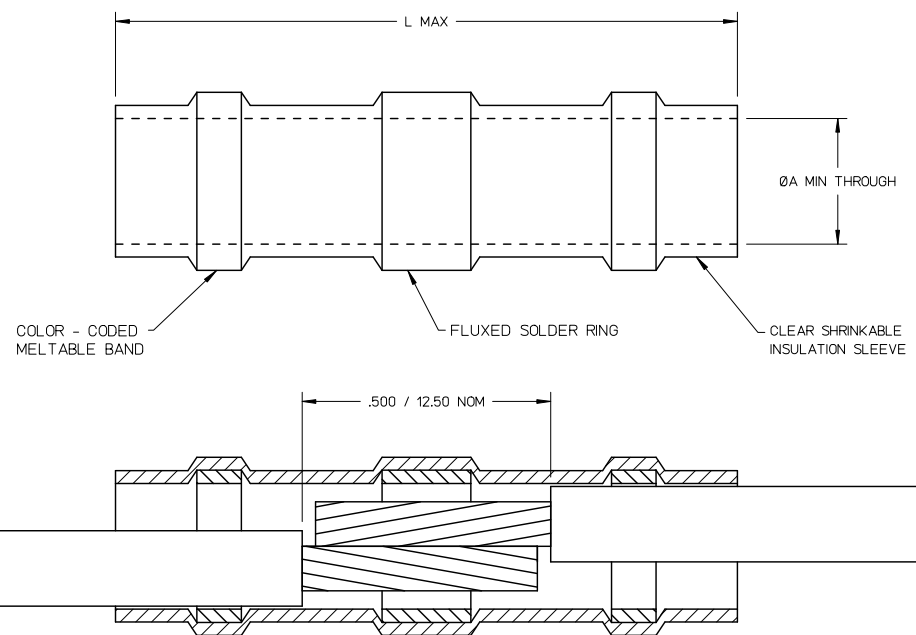

SALES DRAWING

NOTES:
 ⓓ 1. PARTS ARE NOT RoHS COMPLIANT

RMV ROHS COMPLNC IEC NO: WNAZ009-0740 DRW: WETHRODAHL 2009/05/11 CHKD: JMACNEIL 2009/05/11 APPR: JMACNEIL 2009/05/12	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE IN/MM	SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION																		
	$\nabla=0$ $\sphericalangle=0$	<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±.005</td> </tr> <tr> <td>2 PLACES</td> <td>±0.13</td> <td>±.010</td> </tr> <tr> <td>1 PLACE</td> <td>±0.25</td> <td>±---</td> </tr> <tr> <td colspan="3">ANGULAR ±---°</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±.005	2 PLACES	±0.13	±.010	1 PLACE	±0.25	±---	ANGULAR ±---°			DRAWN BY: EMF DATE: 01/20/94 CHECKED BY: _____ DATE: _____ APPROVED BY: _____ DATE: _____	TITLE	SOLDER SPLICE CONNECTOR	
		mm	INCH																					
	4 PLACES	±---	±---																					
3 PLACES	±---	±.005																						
2 PLACES	±0.13	±.010																						
1 PLACE	±0.25	±---																						
ANGULAR ±---°																								
REV	DESCRIPTION	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-19164-074	MOLEX INCORPORATED SHEET NO. 1 OF 1																			
ⓓ			SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																				

fb_frame_A_P_ME_T
 Rev. E 2006/04/15

5 4 3 2 1