

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	N	REV / REDRAWN / 0720-0482-95 & 0720-0002-95	14FEB95	LO ME

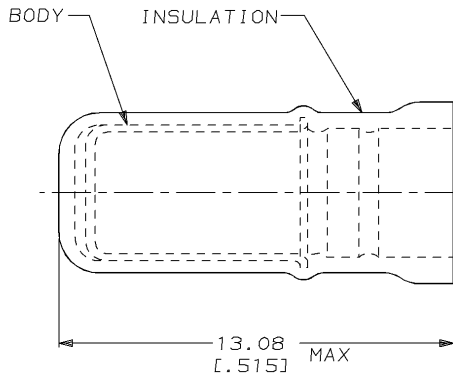

1. USE FOR AN UNSTRIPPED (SINGLE) WIRE END ONLY
2. WIRE INSUL DIA, 3.05-3.68 [1.120-.145]

-	-	-
1000	LOOSE PIECE	324486
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN L OLMEDA 14FEB95	AMP AMP Incorporated Harrisburg, PA 17105-3608
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -	DIMENSIONS: mm [in]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.20 (1.008) 3 PLC ±- 4 PLC ±- ANGLES ±-	CHK M ELLIS 14FEB95	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: -	MATERIAL BODY, CU PER ASTM B152 INSUL., NYLON, COLOR, BLUE	FINISH BODY, TIN PLATE PER MIL-T-10727	PRODUCT SPEC -	SPARE WIRE CAP, BLUE
FOR ORDER ENTRY	1-800-526-5142				APPLICATION SPEC -	SIZE A3
AMP 1470-19 REV 09MAY94					WEIGHT -	CAGE CODE 00779
AMP 1470-19 REV 09MAY94					CUSTOMER DRAWING	DRAWING NO C-324486
AMP 1470-19 REV 09MAY94						SCALE 8:1
AMP 1470-19 REV 09MAY94						SHEET 1 OF 1
AMP 1470-19 REV 09MAY94						REV N