

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	N	REV PER ECR 07-027142	12NOV07	JR	TM

AMP WIRE RANGE	Listed
22-16 AWG STRANDED	22-16 AWG STRANDED

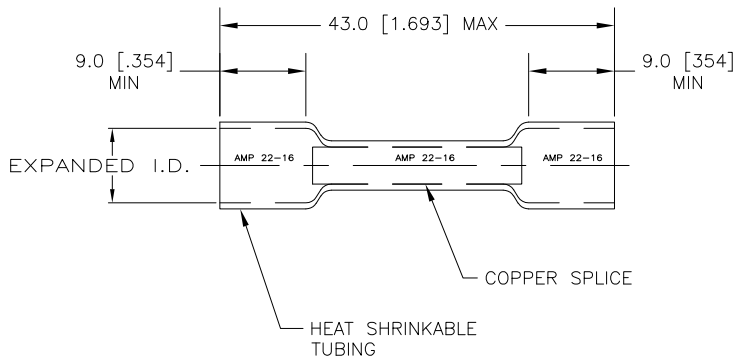

1 TUBING MATERIAL; CROSS-LINKED POLYMER WITH MELT LINER; COLOR, RED; BLACK INK LEGEND 1/16 MIN; HEIGHT; ONE FULL APPEARANCE MIN.

2 TEMP RATING -65°F TO 257°F [-55°C TO 125°C]

3 NO AGENCY APPROVALS, NEITHER UL OR CSA APPROVED.

4 SHIPPING WEIGHT .003 LBS EACH

5 VOLTAGE RATING: 600 V MAX (1000 V MAX FIXTURES & SIGNS)

6 MATERIAL & FINISH ; BODY - COPPER, TIN PLATED SLEEVE - NYLON

7 PRELIMINARY - NOT FOR PRODUCTION

3 ON TAPE, REEL	4.44 [.175]	1.65 [.065]	2500	7 2-603502-1
LOOSE PIECE	4.44 [.175]	1.65 [.065]	1000	603502-3
SMALL PACK	4.44 [.175]	1.65 [.065]	50/BOX	603502-2
PACKAGE TYPE	EXPANDED I.D. MIN	RECOVERED I.D. MAX	QTY	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	24JUN04			Tyco Electronics Corporation	
		CHK	24JUN04			Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		T MICHELUTTI		NAME		PRE-INSULATED SEALED SPLICE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		T MICHELUTTI		PRODUCT SPEC		WIRE SIZE: 22-16 AWG	
0 PLC ± -		APVD		APPLICATION SPEC		-	
1 PLC ± -		24JUN04		WEIGHT		-	
2 PLC ± 0.51 [.02]		SIZE		CAGE CODE		DRAWING NO	
3 PLC ± 0.13 [.005]		A3		00779		C-603502	
4 PLC ± -		RESTRICTED TO		CUSTOMER DRAWING		SCALE 1:1 SHEET 1 OF 1 REV N	
ANGLES ± -		FINISH		-		-	
MATERIAL		6		-		-	