

4

3


2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD
G	14	A1	REV PER ECR 07-019630	17AUG07	JR TM

AMP WIRE RANGE
26-22 AWG SOLID OR STRANDED

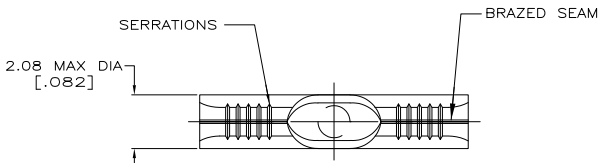

- △ STAMP AMP APPROX AS SHOWN
- △ MAXIMUM LENGTH DOES NOT INCLUDE MANUFACTURING TABS
- △ COPPER PER ASTM B-152, ANNEALED

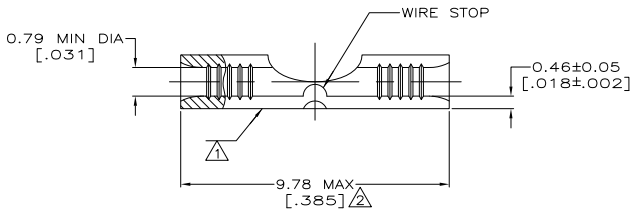

GOLD PLATE 0.00127[.000050] MIN THK PER MIL-G-45204 OVER	324369
NICKEL PLATE 0.00762[.000030] MIN THK PER QQ-N-290	
FINISH	PART NO.

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 260°C
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-8752	VOLTAGE RATING: N/A
FOR APPLICATION	TOOLING ASSISTANCE CENTER	CIRCULAR MIL AREA: 0.1-0.41mm ² [202-810] SOLID OR STRANDED
TOOLING INFORMATION	1-800-722-1111	
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IF THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE: 6-15-93	BY: J.A. BRINKMAN	DATE: 6-15-93	BY: J.A. PATTERSON	DATE: 6-15-93	BY: J.L. MECKLEY	NAME: J.L. MECKLEY	PRODUCT SPEC: ---	APPLICATION SPEC: ---	WEIGHT: ---	SIZE: A2	CAGE CODE: 00779	DRAWING NO: C=324369	RESTRICTED TO: ---
DIMENSIONS: MM [INCHES]	OTHER DIMENSIONS: OTHER DIMENSIONS:	0 PLC	1 PLC	2 PLC	3 PLC	4 PLC	ANGLES	FINISH	SEE TABLE	CUSTOMER DRAWING	SCALE: 10:1	SHEET: 1 of 1	REV: A1		

AMP 1471-9 REV 31MM2000

324369

A