

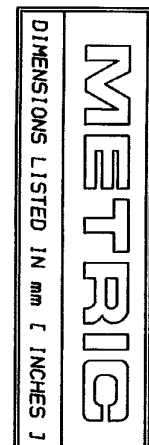


DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	6	DIST	14	P	P	ZONE	LTR	REVISIONS	DESCRIPTION	DATE	APPD
						E		REVISED & REDRAWN PER 0720-0303-93		8-30-93	SPB



NOTE:
 1. WIRE INSULATION DIA 8.51(L.335) MAX

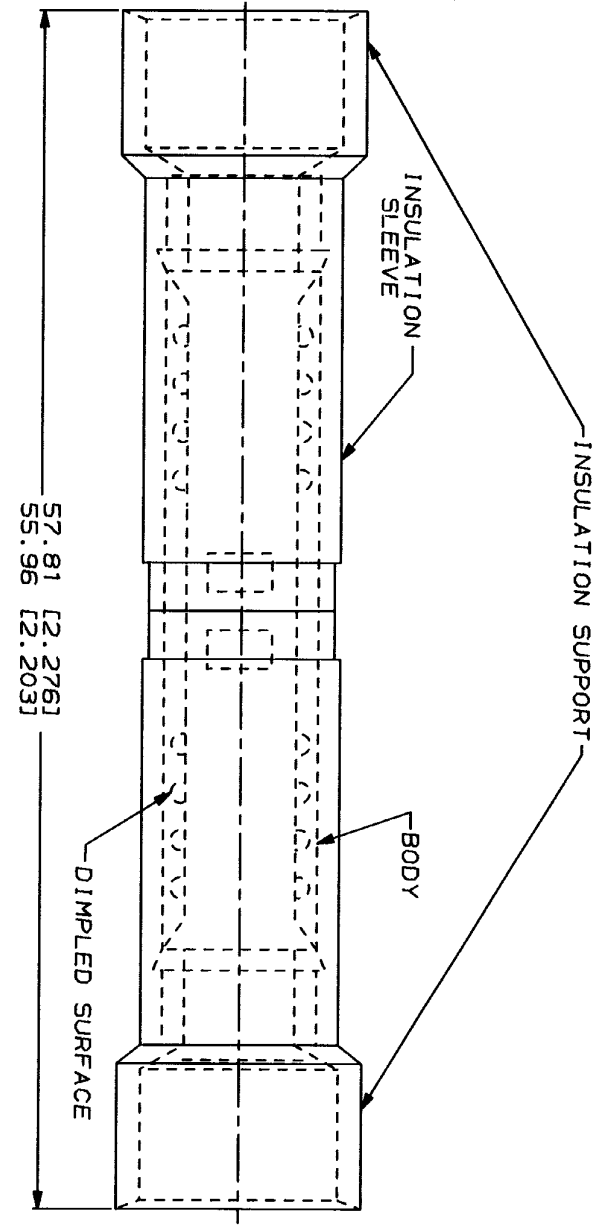

AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS FOR APPLICATION		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: 600 V MAX		DO NOT SCALE PRINT. DIMENSIONS ON THIS DRAWING ARE IN MILLIMETERS UNLESS SPECIFIED OTHERWISE. 3 P.C. REC. 2. AMPL. 2.		DR. S.S. BOLDEN		QTY		LOOSE PC		324657	
TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 5.64-10.5mm² (13,100-20,800)		STRANDED		FINISH PER MIL-T-10727		CHK. R. JENSEY		APPD. R. BLISS		SIZE B		CASE CODE 00779	
FOR ORDER ENTRY 1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. REVISED EDITIONS SHOULD BE CONSULTED FOR THE LATEST REVISION.		TIN PLATE		APPL. SPEC		APPD. R. BLISS		PRODUCT SPEC		SCALE NTS		DRAWING NO. 324657	

AMP 1400-15 REV 3-92 10 JAN 1994 14:53:33 AMP10744 <DU128A>DEPT1132>AMP10744<UJ,TERMIN,SP,ICE-CLST

CUSTOMER DRAWING