


REV	DATE	APP'D	DESCRIPTION
1	2-24-93		RELEASED PER 0720-0008-93



AMP WIRE RANGE 26-22 AWG STRANDED	UL E13288 Listed
NOT CERTIFIED	MILITARY P/W AND CLASS
NOT CERTIFIED	NOT APPLICABLE

△ STAMP AMP APPROX AS SHOWN
 △ MAXIMUM LENGTH DOES NOT INCLUDE
 MANUFACTURING TABS

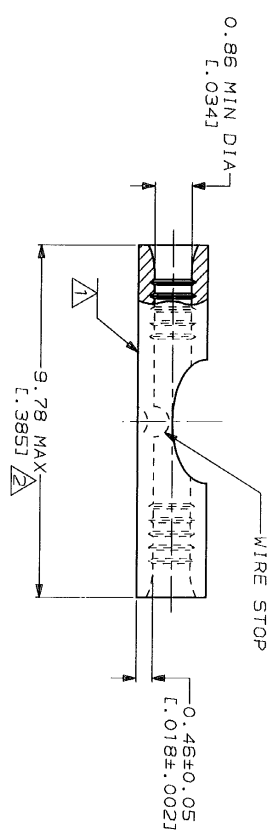

**AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
 FOR APPLICATION TOOLING INFORMATION
 FOR ORDER ENTRY

PRODUCT INFORMATION CENTER
 1-800-522-6752
 TOOLING ASSISTANCE CENTER
 1-800-722-1111
 1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX
 VOLTAGE RATING: NOT APPLICABLE
 WIRE CROSS SECTIONAL AREA RANGE: 0.1-0.41mm² (202-810) CIR MILS STRANDED

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 3 PLG DEC ± .1 3 PLG DEC ± .1 MATERIAL COPPER PER ASTM B-152 ANNEALED
 FINISH TIN PLATE 0.00254L (00100) MIN THK PER MIL-T-10727

DR 2-24-93 TA BRINKMAN	NAME	AMP
CHK 2-24-93 DA PATTERSON	SIZE	00779
APPD 2-24-93 DE HILLER	CAGE CODE	321024
APPD 2-24-93 JL MECKLEY	DRAWING NO	321024
PRODUCT SPEC	SCALE	10:1
APPLICATION SPEC	SHEET	1 OF 1

SPLICE, BUTT,
 STRAP, BUDGET