



Fig. 2 Positive lock for secure tap

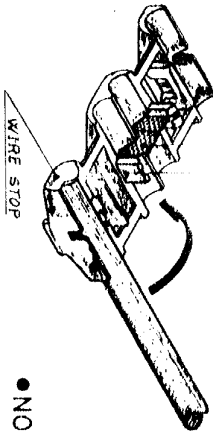

1st STEP
LAY THE CONDUCTOR IN THE HOUSING AS SHOWN

2nd STEP
FOLD UP THE HOUSING ACCORDING TO THE ARROW TILL LEAN THE CONDUCTOR AGAINST THE CONTACT

- NO SPECIAL TOOLS
- NO WIRE STRIPPING
- FOR SOLID OR STRANDED WIRE OF SECTION 4 TO 6 mm
- EASY ASSEMBLY

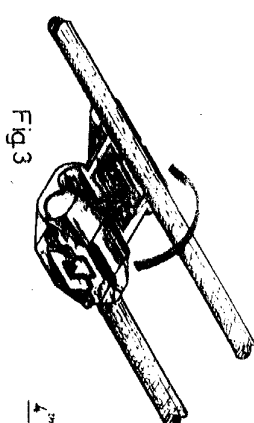

4th STEP

FOLD UP ACCORDING TO THE ARROW (FIG. 3) TILL LEAN THE CONTACT AGAINST THE CONDUCTOR


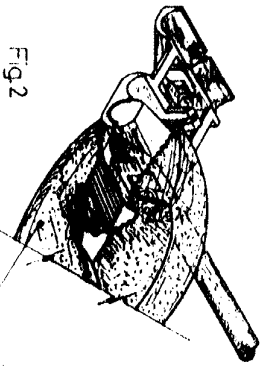


Fig. 2

PLIERS

3rd STEP
SQUEEZE WITH TOOLING (PLIERS FIG. 2) TILL POSITIVE LOCK IS LATCHED

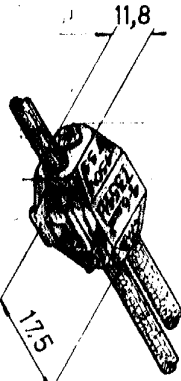

5th STEP

SQUEEZE TILL LATCH THE POSITIVE LOCK FINISHED ASSEMBLY

NÚMERO		PN-735411	
PN.	735411	MATERIAL	ACABADO
PLANO DE CLIENTE SOLO PARA REFERENCIA			
REVISIÓN	8/92	FECHA	8/92
© 1988 POR AMP - ESPAÑA S. A. TODOS LOS DERECHOS RESERVADOS POR LOS PRODUCTOS AMP ESTÁN CUBIERTOS POR PATENTES ACTUALES O FUTURAS			
QUEDA PROHIBIDA LA REPRODUCCIÓN O EL USO DE ESTOS DISEÑOS SIN EL CONSENTIMIENTO ESCRITO DE AMP	AL	8	PN-735411
ELECTRO TAP CONNECTOR			

DIMENSIONES EN M. M.

8 7 6 5 4 3 2 1