

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	H	REVISE&REDRAW ON CAD/OL20-0142-97	29AUG97	ME SB

- 1 WIRE INSULATION DIA 1.17-2.29 [.046-.090]
- ② COPPER PER ASTM B 152
- ③ TIN PLT PER ASTM B 545

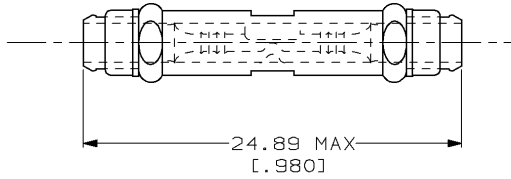

25	LOOSE PIECE	324544
QTY	PACKAGE TYPE	PART NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEM	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:	-
VOLTAGE RATING:	-
CIRCULAR MIL AREA:	-

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±-
	1 PLC ±-
	2 PLC ±-
	3 PLC ±-
	4 PLC ±-
	ANGLES ±-
MATERIAL RING & BODY △ SLEEVE, NYLON, NAT	FINISH RING & BODY △

DWN M ELLIS	AMP Incorporated Harrisburg, PA 17105-3608
CHK S BORTNER	NAME ASSEMBLY, SPLICE, BUTT, CERTI-SEAL™, 24-20 AWG
APVD C FOX	SIZE CAGE CODE DRAWING NO RESTRICTED TO
PRODUCT SPEC	A3 00779 C-324544
APPLICATION SPEC	WEIGHT -
SCALE 4:1	SHEET 1 OF 1 REV H
CUSTOMER DRAWING	