
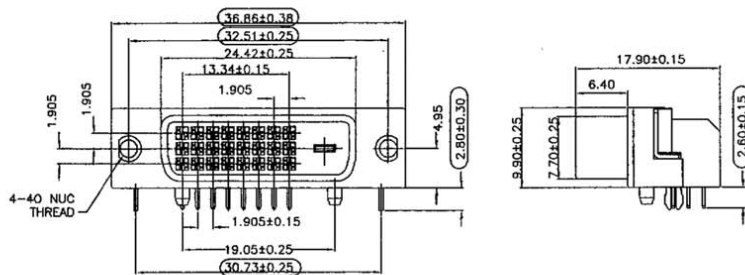


RECOMMENDED P.C.B LAYOUT  
TOLERANCES: ±0.05mm



NOTES:

1. ENVIRONMENTAL: TEMPERATURE RANGE -20° TO +85°.
2. ELECTRICAL:
  - RATED: 1.5A @ 40V AC (ms)
  - CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM
  - INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC (ms)
3. MECHANICAL:
  - MATING FORCE: 10 LB.(4.5kg) MAXIMUM
  - UNMATING FORCE: 2.2LB.(1kg) MINIMUM, 8.8LB.(4kg) MAXIMUM
4. MATERIAL:
  - HOUSING: CLASS FILLED THERMOPLASTIC, NATURAL, UL 94V-0
  - CONTACT: PHOSPHOR BRONZE
  - SHELL :NICKEL/LOVER CU PLATED
  - BOARD LOCK : ZINC ALLOY, TIN PLATED

UNLESS OTHERWISE  
SPECIFIED TOLERANCE

ANG.	±3°
.0	±0.30
.00	±0.20



ITEM NO	<b>A-DVI-D-R</b>
TITLE	DVI Connector integrated 24+5 Socket right angle type

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283  
Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
© Copyright 2008 by Assmann Electronic Components  
All International Rights Reserved