



NOTE:
 1. MATERIAL:
 HOUSING: THERMOPLASTIC POLYESTER WITH GLASS FIBER FILLED.
 UL 94V-0, COLOR: BLACK.
 COVER: THERMOPLASTIC POLYESTER WITH GLASS FIBER FILLED.UL 94V-0, COLOR: BLACK.
 CONTACT: PHOSPHOR BRONZE
 FRONT SHIELD: BRASS
 REAR SHIELD: BRASS
 GROUND FINGER: BRASS
 2. FINISH:
 CONTACT :15 MICRONCH GOLD PLATED IN CONTACT AREA.
 150 MICRONCH-250 MICRONCH TIN PLATED ON SOLDER TAILS.
 50 MICRONCH NICKEL UNDERPLATED OVER ALL.
 FRONT SHIELD: 100 MICRONCH TIN PLATED ON ENTIRE WITH
 50 MICRONCH NICKEL UNDERPLATED OVER ALL.
 REAR SHIELD: NICKEL PLATED WITH 120 MICRONCH MINIMUM.
 GROUND FINGER:100 MICRONCH TIN PLATED ON ENTIRE WITH
 50 MICRONCH NICKEL UNDERPLATED OVER ALL.
 3. PRODUCT SPECIFICATION:REFER TO PS-67857-002
 4. PACKAGING: REFER TO PK-67857-002
 5. TEST SUMMARY: REFER TO TS-67857-002
 6. LEAD-FREE AND ROHS COMPLIANT PRODUCT

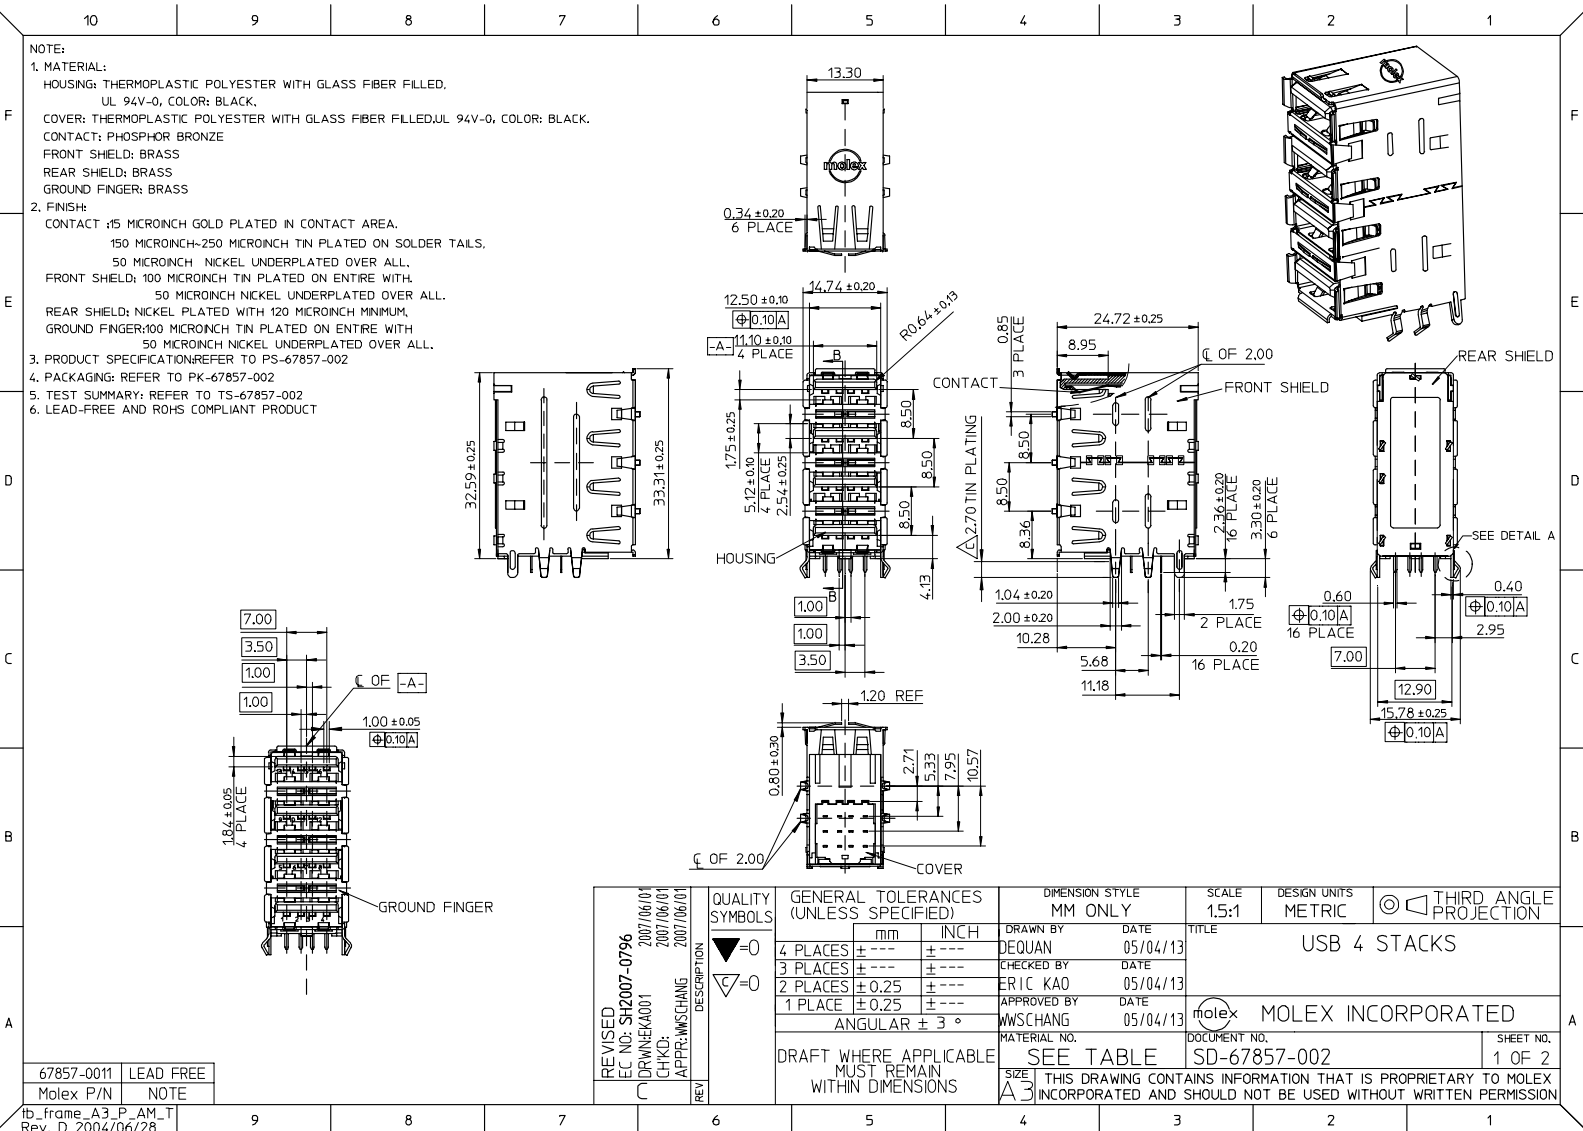

67857-0011	LEAD FREE
Molex P/N	NOTE
Rev. D 2004/06/28	

REVISED EC NO: SH2007-0796 DRW:WFK001 CHKD: 2007/06/01 APPR:WMSCHANG 2007/06/01	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM ONLY	SCALE 1.5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																	
		<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>3 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.25</td> <td>± ---</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.25</td> <td>± ---</td> </tr> <tr> <td colspan="3">ANGULAR ± 3 °</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± 0.25	± ---	1 PLACE	± 0.25	± ---	ANGULAR ± 3 °			DRAWN BY DEQUAN DATE 05/04/13	CHECKED BY ERIC KAO DATE 05/04/13	APPROVED BY WMSCHANG DATE 05/04/13
	mm	INCH																					
4 PLACES	± ---	± ---																					
3 PLACES	± ---	± ---																					
2 PLACES	± 0.25	± ---																					
1 PLACE	± 0.25	± ---																					
ANGULAR ± 3 °																							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-67857-002	SHEET NO. 1 OF 2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																			

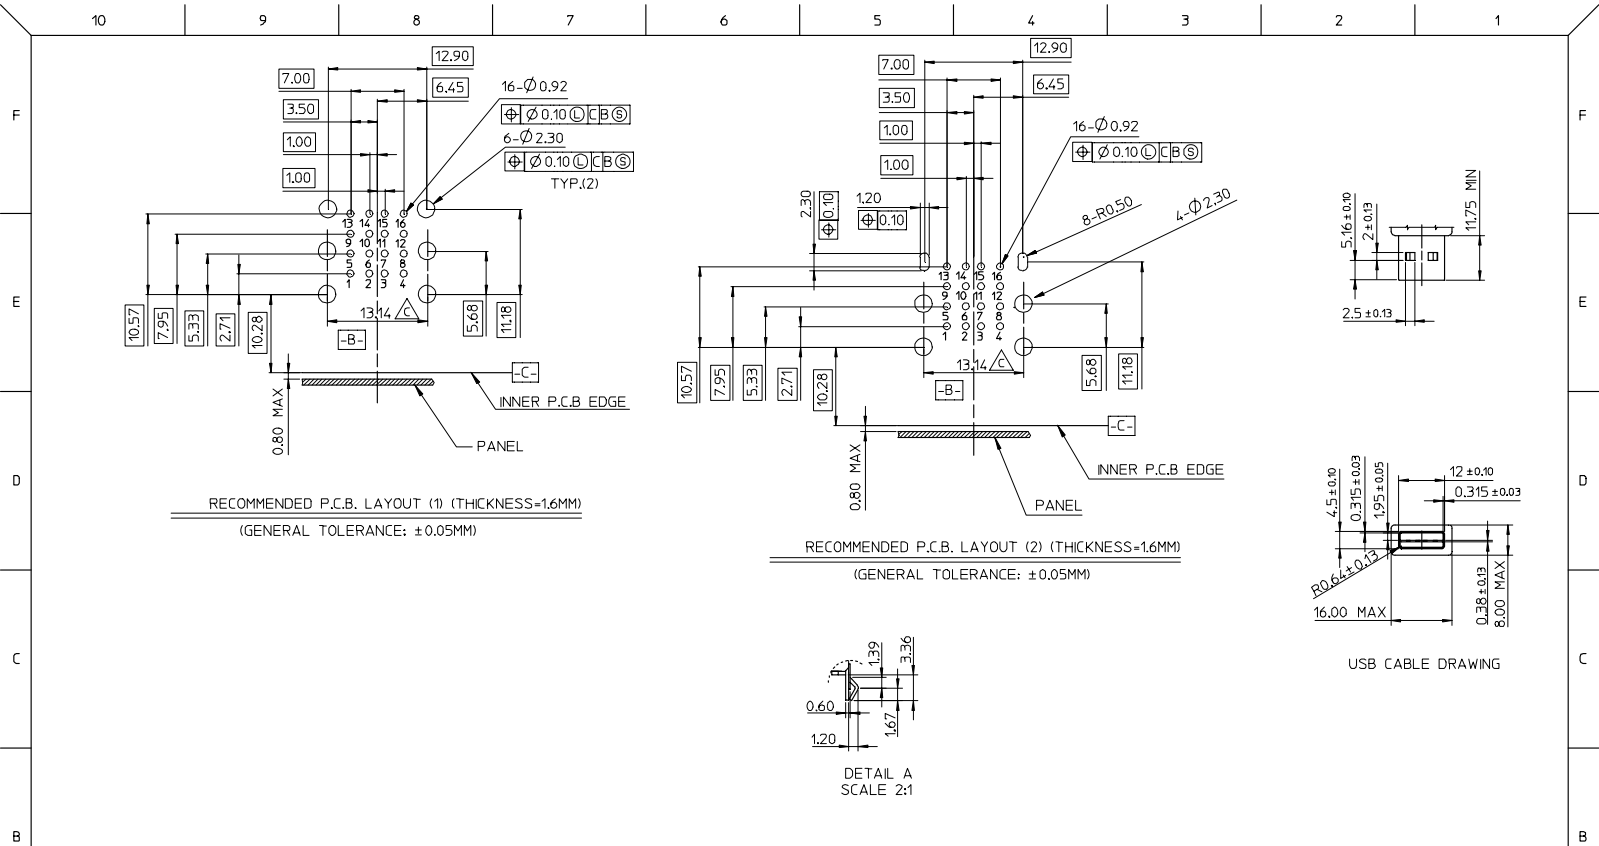

RECOMMENDED P.C.B. LAYOUT (1) (THICKNESS=1.6MM)
(GENERAL TOLERANCE: ±0.05MM)

RECOMMENDED P.C.B. LAYOUT (2) (THICKNESS=1.6MM)
(GENERAL TOLERANCE: ±0.05MM)

USB CABLE DRAWING

DETAIL A
SCALE 2:1

REVISED EC NO: SH2007-0796 DRW: KEA001 CHKD: 2007/06/01 APPR: WWSCHANG 2007/06/01	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	2 PLACES ± 0.25 ± ---	1 PLACE ± 0.25 ± ---	ANGULAR ± 3°	DRAWN BY DEQUAN	DATE 05/04/13	TITLE USB 4 STACKS	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					CHECKED BY ERIC KAO	DATE 05/04/13	APPROVED BY WWSCHANG	
		MATERIAL NO. SEE TABLE		DATE 05/04/13		DOCUMENT NO. SD-67857-002		SHEET NO. 2 OF 2		