


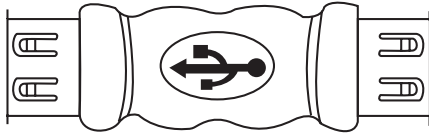


1 2 3 4

A



B

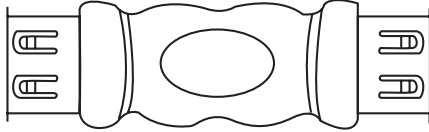

A

B

**Remark:**

- 1.Hook Up Wire:Non-UL 26AWG
- 2.Connector: P1&P2: USB A Female Gold Flash Contact; Nickel Plated Shell  
Plastic:White
- 3.Inner Mold with Copper Foil
- 4.Hood: Molded Type PVC 45P Color: Beige(NK-A03)
- 5.Electrical Test: A.100% Open Short & Mis Wire Test  
B. Contact Resistance 3 Ohm Max  
C. Insulation Resistance 20m Ohm min
- 6.Packing:See P-0039 Rev. C Packing Drawing+EAN Code  
EAN-Code:4016032052692

PIN Out  
(P1)

(P2)

1 _____	1
2 _____	2
3 _____	3
4 _____	4
Shell _____	Shell

C

C

Description

Name :  
**A - USB - 4**  
USB Adaptor (A/F-A/F)

D

D



THIS DRAWING IS UNPUBLISHED  
© Copyright 2005 by Assmann Electronic Components All International Rights Reserved  
This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1 2 3 4