


DATE BY	REVISION

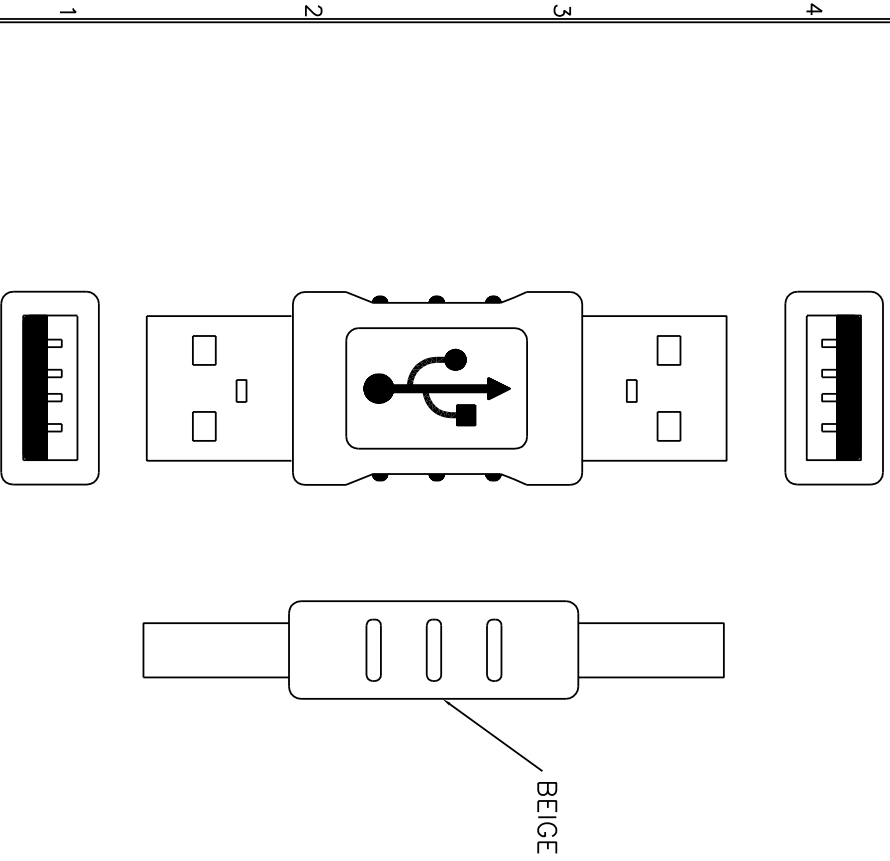

INSULATOR MATERIAL  
 :PBT, UL 94V-0  
 CONTACT MATERIAL  
 :Brass, Gold Plated Over Nickel  
 SHELL FINISH  
 :Nickel Silver  
 OVERMOLD MATERIAL  
 :PVC  
 CURRENT RATING  
 :0.5mA  
 DIELECTRIC STRENGTH  
 :1000V AC for one minute  
 INSULATOR RESISTANCE  
 :1000M  $\Omega$  min at 500V DC

CONFIGURATION:  
 A MALE    A MALE  
 1 \_\_\_\_\_ 1  
 2 \_\_\_\_\_ 2  
 3 \_\_\_\_\_ 3  
 4 \_\_\_\_\_ 4  
 G \_\_\_\_\_ G

DATE	17 JAN,2003	PARTS NO		TITLE:	ADAPTER USB A MALE/MALE <b>A-USB-5</b>	DRAWN	Y.C.C 1/17	CHECK		APPRO	
UNIT	MM	DRAWN NO	A-USB-5	ASSMANN ELECTRONICS,INC							
SCALE		BUYER NO	002								