



**ET** series Bi-Polarized, Wide Temperature Range

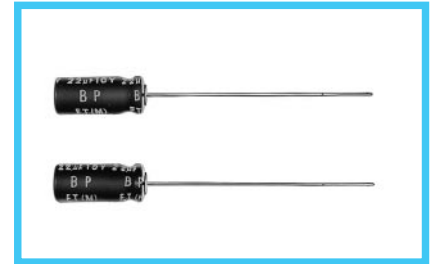


- Bi-polarized series for operations over wide temperature range of  $-55 \sim +105^{\circ}\text{C}$ .




## Specifications

Item	Performance Characteristics									
Category Temperature Range	$-55 \sim +105^{\circ}\text{C}$									
Rated Voltage Range	6.3 ~ 100V									
Rated Capacitance Range	0.47 ~ 1000 $\mu\text{F}$									
Capacitance Tolerance	$\pm 20\%$ at 120Hz, $20^{\circ}\text{C}$									
Leakage Current	After 5 minutes' application of rated voltage, leakage current is not more than 0.03CV or 3 ( $\mu\text{A}$ ), whichever is greater.									
tan $\delta$	Measurement frequency : 120Hz, Temperature : $20^{\circ}\text{C}$									
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	
	tan $\delta$ (MAX.)	0.24	0.20	0.16	0.16	0.14	0.12	0.10	0.09	
Stability at Low Temperature	Measurement frequency : 120Hz									
	Rated voltage (V)		6.3	10	16	25	35	50	63	100
	Impedance ratio	Z- $25^{\circ}\text{C}$ / Z+ $20^{\circ}\text{C}$	4	3	2	2	2	2	2	2
	ZT / Z20 (MAX)	Z- $40^{\circ}\text{C}$ / Z+ $20^{\circ}\text{C}$	8	6	4	4	3	3	3	3
Endurance	After 1000 hours' application of rated voltage at $105^{\circ}\text{C}$ with the polarity inverted every 250 hours, capacitors meet the characteristic requirement listed at right.								Capacitance change	Within $\pm 20\%$ of initial value
									tan $\delta$	200% or less of initial specified value
									Leakage current	Initial specified value or less
Shelf Life	After leaving capacitors under no load at $105^{\circ}\text{C}$ for 1000 hours, they meet the specified value for endurance characteristics listed above.									
Marking	Printed with white color letter on black sleeve.									

## Radial Lead Type

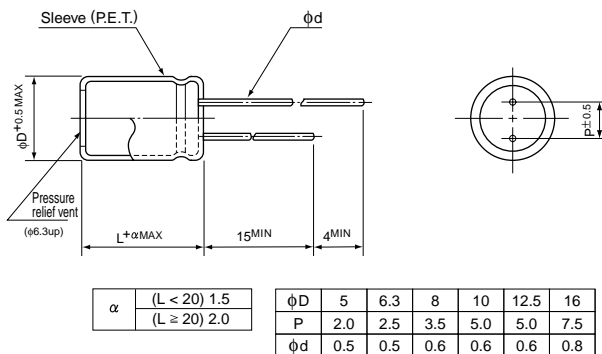

## Type numbering system (Example : 10V 47 $\mu\text{F}$ )

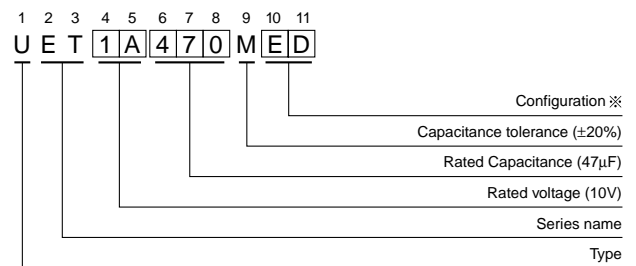

※ Configuration

$\phi D$	Pb free lead finishing Pb free PET sleeve	Sn-Pb lead finishing PVC sleeve contain Pb
5	DD	DH
6.3	ED	EH
8 - 10	PD	PH
12.5 - 16	HD	HH

※ Please contact to us if other configurations are required.

## Dimensions

Cap. ( $\mu\text{F}$ )	V	6.3		10		16		25		35		50		63		100	
		Code	0J	1A	1C	1E	1V	1H	1J	2A							
0.47	R47											5×11	8			5×11	10
1	010											5×11	12			5×11	15
2.2	2R2											5×11	18			6.3×11	22
3.3	3R3											5×11	22			8×11.5	32
4.7	4R7							5×11	23	5×11	25	6.3×11	29	6.3×11	31	8×11.5	39
10	100					5×11	30	5×11	34	6.3×11	40	8×11.5	51	8×11.5	53	10×12.5	64
22	220			5×11	42	6.3×11	51	6.3×11	55	8×11.5	68	10×12.5	82	10×16	96	10×20	114
33	330	5×11	46	6.3×11	57	6.3×11	63	8×11.5	79	10×12.5	89	10×16	107	10×20	129	12.5×20	164
47	470	6.3×11	61	6.3×11	67	8×11.5	89	10×12.5	100	10×12.5	111	10×20	146	10×20	157	12.5×25	200
100	101	8×11.5	104	10×12.5	125	10×12.5	139	10×16	164	10×20	196	12.5×25	264	12.5×25	275	16×25	304
220	221	10×12.5	168	10×16	204	10×20	279	12.5×25	336	12.5×25	364	16×25	443	16×31.5	486		
330	331	10×16	229	10×20	275	12.5×20	346	12.5×25	414	16×25	493	16×31.5	593				
470	471	10×20	300	12.5×20	371	12.5×25	460	16×25	543	16×25	586						
1000	102	12.5×25	550	16×25	668	16×25	746	16×31.5	871								

D × L (mm)

## Frequency coefficient of rated ripple current

Cap. ( $\mu\text{F}$ )	Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz ~
~ 47		0.75	1.00	1.35	1.57	2.00
100 ~ 470		0.80	1.00	1.23	1.34	1.50
1000		0.85	1.00	1.10	1.13	1.15

Please refer to page 19, 20, 21 about the formed or taped product spec.  
Please refer to page 3 for the minimum order quantity.

CAT.8100S