


D max	5	>5 ≤ 7	>7 < 16	≥ 16
Ød ±0.05	0.5	0.6	0.8	1

All dimensions are in mm.

PRODUCT CODE SYSTEM

The part number, comprising 14 digits, is formed as follows:



- Digit 1 to 3 Series code.
- Digit 4 d.c. rated voltage:
G =160V I =250V M= 400V P = 630V
- Digit 5 Length (mm):
F=11; H=14; K=20.5; Q=28; T=33
- Digit 6 to 9 Digits 7 - 8 - 9 indicate the first three digits of Capacitance value and the 6th digit indicates the number of zeros that must be added to obtain the Rated Capacitance in pF.
- Digit 10 to 11 Mechanical version and/or packaging (table1)
- Digit 12 Identifies the dimensions and electrical characteristics.
- Digit 13 Internal use
- Digit 14 Capacitance tolerance:
J=5%; K=10%; M=20%.

Table 1 (for more detailed information, please refer to page 14).

Standard packaging style	Ordering code (Digit 10 to 11)
Reel Ø 355 mm	26
Loose	AA

**METALLIZED POLYPROPYLENE CAPACITOR
MULTIPURPOSE APPLICATIONS**

Typical applications: temperature compensation circuits, timing, oscillator circuits, power factor correction and coupling capacitor in SMPS applications.


PRODUCT CODE: **A70**

GENERAL TECHNICAL DATA

- Dielectric:** polypropylene film.
- Plates:** aluminium layer deposited by evaporation under vacuum.
- Winding:** non-inductive type.
- Leads:** tinned wire.
- Protection:** polyester tape wrapping and thermosetting resin end fill.
- Marking:** Manufacturer's logo, series (1.70), dielectric code (MKP), capacitance, tolerance, D.C. rated voltage.

Climatic category: 55/105/56 IEC 60068-1
Operating temperature range: -55 to +105°C
Related documents: IEC 60384-16

Winding scheme

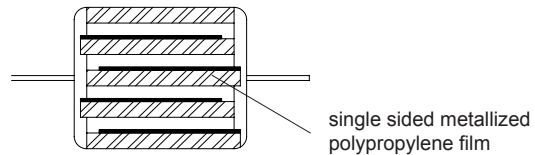

**METALLIZED POLYPROPYLENE CAPACITOR
MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: A70

Rated Cap.	160Vdc/90Vac		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D max	L max			
0.022 μF	5.0	11.0	5	1.60 E3	A70GF 2220--0--
0.033 μF	5.0	11.0	5	1.60 E3	A70GF 2330--0--
0.047 μF	5.0	11.0	5	1.60 E3	A70GF 2470--0--
0.068 μF	5.5	14.0	5	1.60 E3	A70GH2680--0--
0.10 μF	5.5	14.0	5	1.60 E3	A70GH3100--0--
0.15 μF	6.5	14.0	5	1.60 E3	A70GH3150--0--
0.22 μF	7.5	14.0	5	1.60 E3	A70GH3220--0--
0.33 μF	7.0	20.5	3	0.96 E3	A70GK3330--0--
0.47 μF	8.0	20.5	3	0.96 E3	A70GK3470--0--
0.68 μF	8.0	28.0	2	0.64 E3	A70GQ3680--0--
1.0 μF	9.5	28.0	2	0.64 E3	A70GQ4100--0--
1.5 μF	11.0	28.0	2	0.64 E3	A70GQ4150--0--
2.2 μF	12.0	33.0	1	0.32 E3	A70GT 4220--0--
3.3 μF	14.5	33.0	1	0.32 E3	A70GT 4330--0--
4.7 μF	17.0	33.0	1	0.32 E3	A70GT 4470--0--

Rated Cap.	400Vdc/220Vac*		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D max	L max			
6800 pF	5.0	11.0	25.0	20.0 E3	A70MF 1680--0--
0.010 μF	5.5	14.0	13.5	11.0 E3	A70MH2100--0--
0.015 μF	6.0	14.0	13.5	11.0 E3	A70MH2150--0--
0.022 μF	6.0	14.0	13.5	11.0 E3	A70MH2220--0--
0.033 μF	6.5	14.0	13.5	11.0 E3	A70MH2330--0--
0.047 μF	8.0	14.0	13.5	11.0 E3	A70MH2470--0--
0.068 μF	7.0	20.5	10.0	8.0 E3	A70MK2680--0--
0.10 μF	8.0	20.5	10.0	8.0 E3	A70MK3100--0--
0.15 μF	8.0	28.0	6.5	5.2 E3	A70MQ3150--0--
0.22 μF	9.5	28.0	6.5	5.2 E3	A70MQ3220--0--
0.33 μF	11.0	28.0	6.5	5.2 E3	A70MQ3330--0--
0.47 μF	13.0	28.0	6.5	5.2 E3	A70MQ3470--0--
0.68 μF	13.5	33.0	4.0	3.2 E3	A70MT 3680--0--
1.0 μF	16.5	33.0	4.0	3.2 E3	A70MT 4100--0--
1.5 μF	20.0	33.0	4.0	3.2 E3	A70MT 4150--0--

Rated Cap.	250Vdc/200Vac		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D max	L max			
0.010 μF	5.0	11.0	11.0	5.5 E3	A70IF 2100--0--
0.015 μF	5.0	11.0	11.0	5.5 E3	A70IF 2150--0--
0.022 μF	5.5	14.0	10.0	5.0 E3	A70IH 2220--0--
0.033 μF	5.5	14.0	10.0	5.0 E3	A70IH 2330--0--
0.047 μF	6.0	14.0	10.0	5.0 E3	A70IH 2470--0--
0.068 μF	7.0	14.0	10.0	5.0 E3	A70IH 2680--0--
0.10 μF	8.5	14.0	10.0	5.0 E3	A70IH 3100--0--
0.15 μF	7.5	20.5	7.0	3.5 E3	A70IK 3150--0--
0.22 μF	9.0	20.5	7.0	3.5 E3	A70IK 3220--0--
0.33 μF	8.5	28.0	4.0	2.0 E3	A70IQ 3330--0--
0.47 μF	10.0	28.0	4.0	2.0 E3	A70IQ 3470--0--
0.68 μF	11.5	28.0	4.0	2.0 E3	A70IQ 3680--0--
1.0 μF	12.5	33.0	2.5	1.3 E3	A70IT 4100--0--
1.5 μF	15.0	33.0	2.5	1.3 E3	A70IT 4150--0--
2.2 μF	18.0	33.0	2.5	1.3 E3	A70IT 4220--0--
3.3 μF	21.5	33.0	2.5	1.3 E3	A70IT 4330--0--

Rated Cap.	630Vdc/250Vac*		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D max	L max			
1000 pF	5.0	11.0	30	38.0 E3	A70PF 1100--0--
1500 pF	5.0	11.0	30	38.0 E3	A70PF 1150--0--
2200 pF	5.0	11.0	30	38.0 E3	A70PF 1220--0--
3300 pF	5.0	11.0	30	38.0 E3	A70PF 1330--0--
4700 pF	5.0	11.0	30	38.0 E3	A70PF 1470--0--
6800 pF	5.5	14.0	20	25.0 E3	A70PH 1680--0--
0.010 μF	6.0	14.0	20	25.0 E3	A70PH 2100--0--
0.015 μF	7.0	14.0	20	25.0 E3	A70PH 2150--0--
0.022 μF	8.5	14.0	20	25.0 E3	A70PH 2220--0--
0.033 μF	7.5	20.5	15	19.0 E3	A70PK 2330--0--
0.047 μF	8.5	20.5	15	19.0 E3	A70PK 2470--0--
0.068 μF	8.5	28.0	10	13.0 E3	A70PQ 2680--0--
0.10 μF	10.0	28.0	10	13.0 E3	A70PQ 3100--0--
0.15 μF	11.5	28.0	10	13.0 E3	A70PQ 3150--0--
0.22 μF	12.5	33.0	6	7.6 E3	A70PT 3220--0--
0.33 μF	15.0	33.0	6	7.6 E3	A70PT 3330--0--
0.47 μF	17.5	33.0	6	7.6 E3	A70PT 3470--0--
0.68 μF	21.0	33.0	6	7.6 E3	A70PT 3680--0--

Mechanical version and packaging (Table1) _____
Internal use _____
Tolerance: J (±5%); K (±10%); M (±20%) _____

Mechanical version and packaging (Table1) _____
Internal use _____
Tolerance: J (±5%); K (±10%); M (±20%) _____

All dimensions are in mm.

Note 1: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V. The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table. The dv/dt test is carried out at 2 times the above values.

Note 2: Special version for line applications (rated voltage 250 Vac) available upon request.

* Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 145).

**METALLIZED POLYPROPYLENE CAPACITOR
MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: A70

ELECTRICAL CHARACTERISTICS
Rated voltage (V_R): 160 Vdc - 250Vdc
400 Vdc - 630 Vdc

Rated temperature (T_R): +85°C

Temperature derated voltage:

 for temperatures between +85°C and +105°C a decreasing factor of 1.25% per degree °C on the rated voltage V_R (d.c. and a.c.) has to be applied.

Capacitance range: 1000pF to 4.7 μ F

Capacitance values:

E6 series (IEC 60063 Norm).

Capacitance tolerances (measured at 1 kHz):

 $\pm 5\%$ (J); $\pm 10\%$ (K); $\pm 20\%$ (M).

Total self-inductance (L):

max 1 nH per 1 mm lead and capacitor length.

Dissipation factor (DF):
 $\text{tg}\delta \times 10^{-4}$ at +25°C $\pm 5^\circ\text{C}$

kHz	C<0.1 μ F	0.1 μ F to 1 μ F	>1 μ F
1	≤ 6	≤ 6	≤ 6
10	≤ 10	≤ 20	
100	≤ 30		

Insulation resistance:
Test conditions

 Temperature: +25°C $\pm 5^\circ\text{C}$

Voltage charge time: 1 min

Voltage charge: 100Vdc

Performance
 $\geq 1 \times 10^5 \text{ M}\Omega$ for C $\leq 0.33 \mu\text{F}$ ($5 \times 10^5 \text{ M}\Omega$)*
 $\geq 30000 \text{ s}$ for C > 0.33 μF (150000 s)*

*Typical value

Test voltage between terminations:

 1.6x V_R applied for 2 s at +25°C $\pm 5^\circ\text{C}$.

TEST METHOD AND PERFORMANCE
Damp heat, steady state:
Test conditions

 Temperature: +40°C $\pm 2^\circ\text{C}$

 Relative humidity (RH): 93% $\pm 2\%$

Test duration: 56 days

Performance

 Capacitance change $|\Delta C/C|$: $\leq 2\%$

 DF change ($\Delta \text{tg}\delta$): $\leq 10 \times 10^{-4}$ at 1kHz

 Insulation resistance: $\geq 50\%$ of initial limit.

Endurance:
Test conditions

 Temperature: +85°C $\pm 2^\circ\text{C}$

Test duration: 2000 h

 Voltage applied: 1.25x V_R
Performance

 Capacitance change $|\Delta C/C|$: $\leq 3\%$

 DF change ($\Delta \text{tg}\delta$): $\leq 10 \times 10^{-4}$ at 10kHz for C $\leq 1 \mu\text{F}$
 $\leq 10 \times 10^{-4}$ at 1kHz for C > 1 μ F

 Insulation resistance: $\geq 50\%$ of initial limit.

Resistance to soldering heat:
Test conditions

 Solder bath temperature: +260°C $\pm 5^\circ\text{C}$

 Dipping time (with heat screen): 10 s ± 1 s

Performance

 Capacitance change $|\Delta C/C|$: $\leq 1\%$

 DF change ($\Delta \text{tg}\delta$): $\leq 10 \times 10^{-4}$ at 10kHz for C $\leq 1 \mu\text{F}$
 $\leq 10 \times 10^{-4}$ at 1kHz for C > 1 μ F

 Insulation resistance: \geq initial limit.

Long term stability (after two years):

Storage: standard environmental conditions (see page 12).





Performance

 Capacitance change $|\Delta C/C|$: $\leq 0.5\%$

**METALLIZED POLYPROPYLENE CAPACITOR
MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: A70

MAX. VOLTAGE (Vr.m.s.) VERSUS FREQUENCY (sinusoidal wave-form / Th ≤ 40°C)

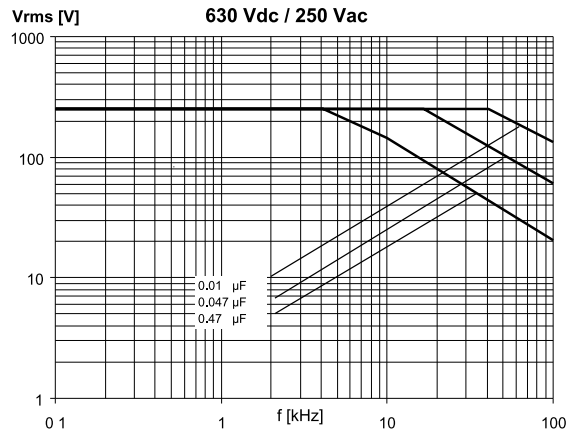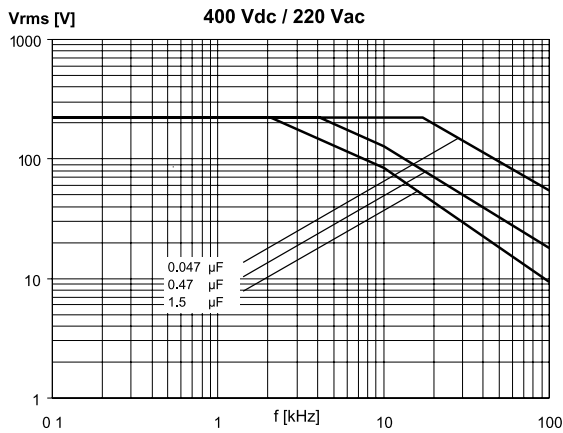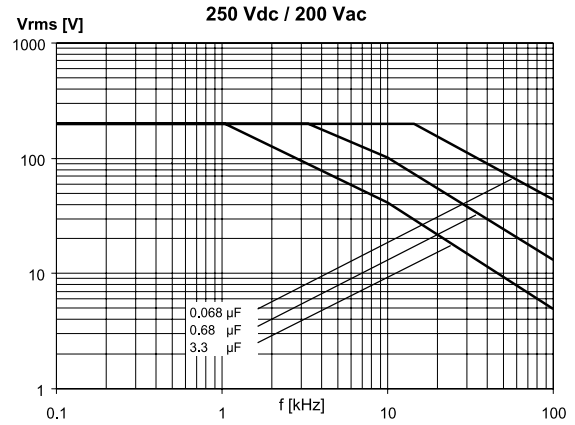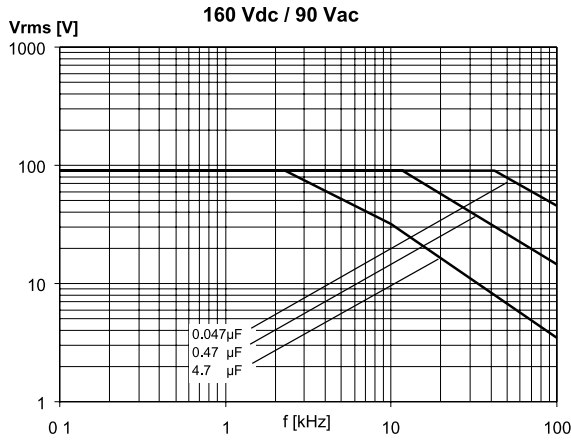

**METALLIZED POLYPROPYLENE CAPACITOR
MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: **A70**

MAX. CURRENT (I_{r.m.s.}) VERSUS FREQUENCY (sinusoidal wave-form / Th ≤ 40°C)

