

- Metallized polyester
- According to CECC 30401-042, IEC 60384-2, DIN 44122




TYPICAL APPLICATIONS

Bypassing, signal coupling. General purpose for highest reliability.

CONSTRUCTION

Metallized polyester film capacitor. Radial leads of tinned wire are electrically welded to the contact metal layer on the ends of the capacitor winding. Encapsulation in self-extinguishing material meeting the requirements of UL 94V-0.

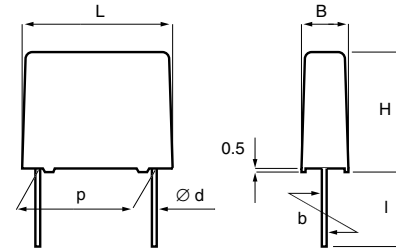

TECHNICAL DATA

Rated voltage U_R , VDC	50	63	100	250	400	630	1000
Rated voltage U_R , VAC	30	40	63	160	200	220	250
Capacitance, μF	0.001	0.001	0.001	0.001	0.001	0.001	0.001
	-10.0	-82	-82	-39	-18	-6.8	-4.7

Capacitance tolerance $\pm 20\%$, $\pm 10\%$ standard, $\pm 5\%$.

Category temperature range $-55 \dots +100^\circ\text{C}$

Voltage derating Above $+85^\circ\text{C}$ DC and AC voltage derating is $1.25\%/^\circ\text{C}$.

Rated temperature $+85^\circ\text{C}$

Climatic category IEC 60068-1, 55/100/56
DIN 40040, FME
 $-55 \dots +100^\circ\text{C}$ ($+125^\circ\text{C}$)
Average relative humidity $\leq 75\%$
RH = 95% for 30 days per year.
RH = 85% for further days limited by average value per year, occasional slight condensation permitted.

Test voltage $1.6 \times U_R$ VDC for 2s

Capacitance drift Max. 2% after a 2 year storage period at a temperature of $+10 \dots +40^\circ\text{C}$ and a relative humidity of 40...60%.


Reliability Operational life $> 200\,000$ h.
Failure rate < 3 FIT, $T = +40^\circ\text{C}$, $U = 0.5 \times U_R$.
Failure criteria according to DIN 44122.

Maximum pulse steepness: dU/dt according to article table. For peak to peak voltages lower than rated voltage ($U_{pp} < U_R$), the specified dU/dt can be multiplied by the factor U_R/U_{pp}


Temperature coefficient $+400 (\pm 200)$ ppm/ $^\circ\text{C}$ at 1 kHz

Self inductance Approximately 6 nH/cm for the total length of capacitor winding and the leads.

p	d	std l	max l	b
5.0 ± 0.4	0.5	4^{+1}	20	± 0.4
7.5 ± 0.4	0.6	4^{+1}	20	± 0.4
10.0 ± 0.4	0.6	4^{+1}	30	± 0.4
15.0 ± 0.4	0.8	4^{+1}	30	± 0.4
22.5 ± 0.4	0.8	4^{+1}	30	± 0.4
27.5 ± 0.4	0.8	4^{+1}	30	± 0.4
37.5 ± 0.5	1.0	4^{+1}	30	± 0.7

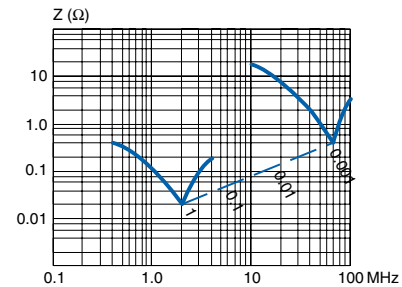

Resonance frequencies
MMK 5

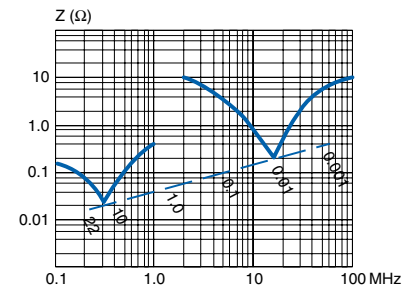

Resonance frequencies
MMK7.5 ... 37.5

ENVIRONMENTAL TEST DATA

Damp heat test Test conditions: $T = +40^\circ\text{C}$, RH = 93%, $t = 56$ days.
Test criteria: $\Delta C/C \leq \pm 5\%$,
 $\Delta \tan \delta \leq 0.005$ (1kHz),
IR after test $0.5 \times$ IR min.

Endurance test Test conditions: $T = +100^\circ\text{C}$, $U = 1.25 \times (0.8 \times U_R)$,
 $t = 2000$ h.
Test criteria: $\Delta C/C \leq \pm 5\%$,
 $\Delta \tan \delta \leq 0.005$ (1kHz)
 $\Delta \tan \delta \leq 0.010$ (100kHz)
IR after test $0.5 \times$ IR min.

TECHNICAL DATA

Dissipation factor tanδ

Maximum values at +23°C

C ≤ 0.1 μF 0.1 μF < C ≤ 1.0 μF C > 1.0 μF

MMK5	1 kHz	0.8%	0.8%	0.8%
	10 kHz	1.2%	1.2%	1.5%
	100 kHz	2.5%	3.0%	
MMK7.5 ... 37.5	1 kHz	0.8%	0.8%	1.0%
	10 kHz	1.5%	1.5%	
	100 kHz	3.0%		

Insulation resistance

Minimum values between terminals.

Measured at +20°C, according to IEC 60384-2.

C ≤ 0.33 μF C > 0.33 μF

U _R ≤ 100V	15000 MΩ	5000 s
U _R > 100V	30000 MΩ	10000 s


ORDERING INFORMATION

See article table and pages 10 to 14 for options and article code construction.


MARKING

- Capacitance
- Tolerance code
- Rated voltage
- Capacitor family code MMK
- Manufacturing date code


RATED AC VOLTAGE VS. FREQUENCY

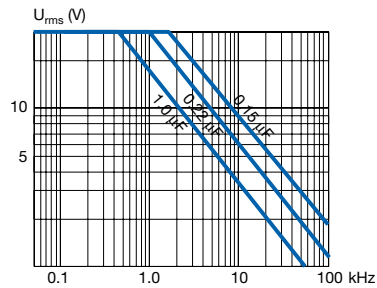


MMK5 50/30

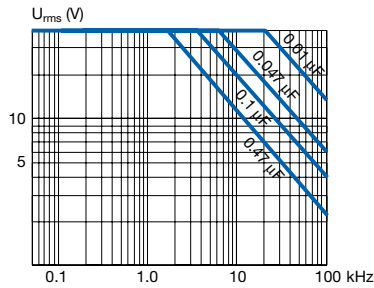


MMK5 63/40

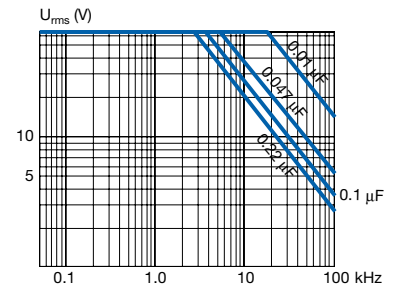


MMK5 100/63

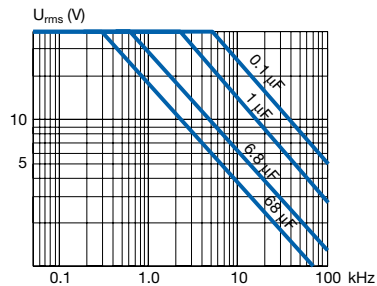


MMK7.5 ... 37.5 63/40

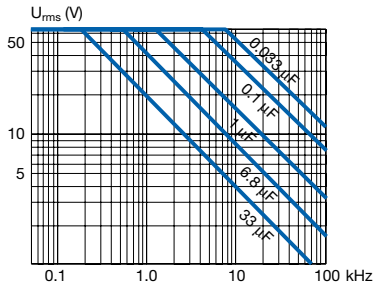


MMK7.5 ... 37.5 100/63

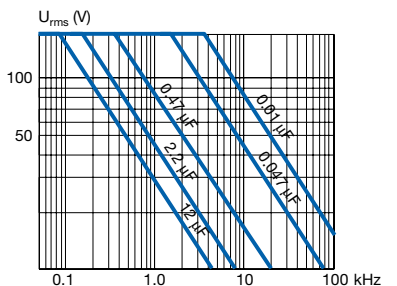


MMK7.5 ... 37.5 250/160

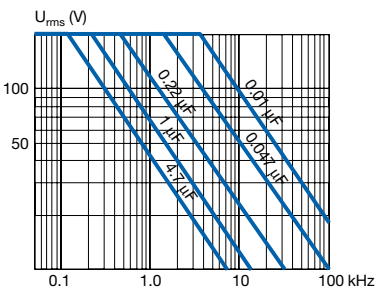

MMK7.5 ... 37.5 400/200

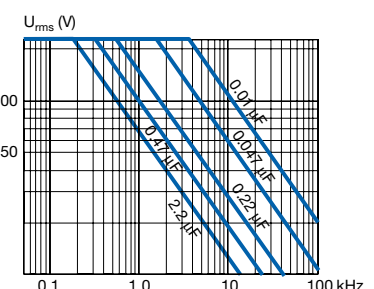

MMK7.5 ... 37.5 630/220

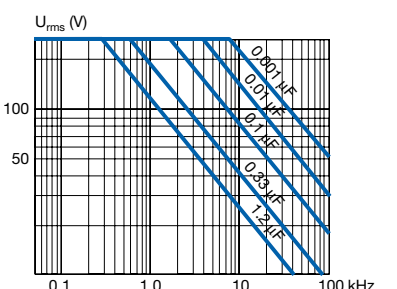

MMK7.5 ... 37.5 1000/250

ARTICLE TABLE

Capacitance µF	Box code	Max dimensions in mm			Max dU/dt V/µs	Article code		Capacitance µF	Box code	Max dimensions in mm			Max dU/dt V/µs	Article code
		B	H	L						B	H	L		
50 VDC/30 VAC							50 VDC/30 VAC							
LEAD SPACING 5 MM							LEAD SPACING 7.5 MM							
0.0010	J01	2.5	6.5	7.2	12	MMK5 102K50J01L4 BULK	0.0068	K00	2.5	6.0	10.0	5	MMK7.5 682K50K00L4 BULK	
0.0012	J01	2.5	6.5	7.2	12	MMK5 122K50J01L4 BULK	0.0082	K00	2.5	6.0	10.0	5	MMK7.5 822K50K00L4 BULK	
0.0015	J01	2.5	6.5	7.2	12	MMK5 152K50J01L4 BULK	0.010	K00	2.5	6.0	10.0	5	MMK7.5 103K50K00L4 BULK	
0.0018	J01	2.5	6.5	7.2	12	MMK5 182K50J01L4 BULK	0.012	K00	2.5	6.0	10.0	5	MMK7.5 123K50K00L4 BULK	
0.0022	J01	2.5	6.5	7.2	12	MMK5 222K50J01L4 BULK	0.015	K00	2.5	6.0	10.0	5	MMK7.5 153K50K00L4 BULK	
0.0027	J01	2.5	6.5	7.2	12	MMK5 272K50J01L4 BULK	0.018	K00	2.5	6.0	10.0	5	MMK7.5 183K50K00L4 BULK	
0.0033	J01	2.5	6.5	7.2	12	MMK5 332K50J01L4 BULK	0.022	K00	2.5	6.0	10.0	5	MMK7.5 223K50K00L4 BULK	
0.0039	J01	2.5	6.5	7.2	12	MMK5 392K50J01L4 BULK	0.027	K00	2.5	6.0	10.0	5	MMK7.5 273K50K00L4 BULK	
0.0047	J01	2.5	6.5	7.2	12	MMK5 472K50J01L4 BULK	0.033	K00	2.5	6.0	10.0	5	MMK7.5 333K50K00L4 BULK	
0.0056	J01	2.5	6.5	7.2	12	MMK5 562K50J01L4 BULK	0.039	K00	2.5	6.0	10.0	5	MMK7.5 393K50K00L4 BULK	
0.0068	J01	2.5	6.5	7.2	12	MMK5 682K50J01L4 BULK	0.047	K00	2.5	6.0	10.0	5	MMK7.5 473K50K00L4 BULK	
0.0082	J01	2.5	6.5	7.2	12	MMK5 822K50J01L4 BULK	0.056	K00	2.5	6.0	10.0	5	MMK7.5 563K50K00L4 BULK	
0.010	J01	2.5	6.5	7.2	12	MMK5 103K50J01L4 BULK	0.068	K00	2.5	6.0	10.0	5	MMK7.5 683K50K00L4 BULK	
0.012	J01	2.5	6.5	7.2	12	MMK5 123K50J01L4 BULK	0.082	K00	2.5	6.0	10.0	5	MMK7.5 823K50K00L4 BULK	
0.015	J01	2.5	6.5	7.2	12	MMK5 153K50J01L4 BULK	0.10	K00	2.5	6.0	10.0	5	MMK7.5 104K50K00L4 BULK	
0.018	J01	2.5	6.5	7.2	12	MMK5 183K50J01L4 BULK	0.12	K00	2.5	6.0	10.0	5	MMK7.5 124K50K00L4 BULK	
0.022	J01	2.5	6.5	7.2	12	MMK5 223K50J01L4 BULK	0.15	K00	2.5	6.0	10.0	5	MMK7.5 154K50K00L4 BULK	
0.027	J01	2.5	6.5	7.2	12	MMK5 273K50J01L4 BULK	0.18	K00	2.5	6.0	10.0	5	MMK7.5 184K50K00L4 BULK	
0.033	J01	2.5	6.5	7.2	12	MMK5 333K50J01L4 BULK	0.22	K00	2.5	6.0	10.0	5	MMK7.5 224K50K00L4 BULK	
0.039	J01	2.5	6.5	7.2	12	MMK5 393K50J01L4 BULK	0.27	K00	2.5	6.0	10.0	5	MMK7.5 274K50K00L4 BULK	
0.047	J01	2.5	6.5	7.2	12	MMK5 473K50J01L4 BULK	0.33	K00	2.5	6.0	10.0	5	MMK7.5 334K50K00L4 BULK	
0.056	J01	2.5	6.5	7.2	12	MMK5 563K50J01L4 BULK	0.39	K01	4.0	8.0	10.0	5	MMK7.5 394K50K01L4 BULK	
0.068	J01	2.5	6.5	7.2	12	MMK5 683K50J01L4 BULK	0.47	K01	4.0	8.0	10.0	5	MMK7.5 474K50K01L4 BULK	
0.082	J01	2.5	6.5	7.2	12	MMK5 823K50J01L4 BULK	0.56	K01	4.0	8.0	10.0	5	MMK7.5 564K50K01L4 BULK	
0.10	J01	2.5	6.5	7.2	12	MMK5 104K50J01L4 BULK	0.68	K01	4.0	8.0	10.0	5	MMK7.5 684K50K01L4 BULK	
0.12	J01	2.5	6.5	7.2	12	MMK5 124K50J01L4 BULK	0.82	K01	4.0	8.0	10.0	5	MMK7.5 824K50K01L4 BULK	
0.15	J01	2.5	6.5	7.2	12	MMK5 154K50J01L4 BULK	1.0	K01	4.0	8.0	10.0	5	MMK7.5 105K50K01L4 BULK	
0.18	J01	2.5	6.5	7.2	12	MMK5 184K50J01L4 BULK	1.2	K03	5.0	11.0	10.0	5	MMK7.5 125K50K03L4 BULK	
0.22	J01	2.5	6.5	7.2	12	MMK5 224K50J01L4 BULK	1.5	K03	5.0	11.0	10.0	5	MMK7.5 155K50K03L4 BULK	
0.27	J01	2.5	6.5	7.2	12	MMK5 274K50J01L4 BULK	1.8	K03	5.0	11.0	10.0	5	MMK7.5 185K50K03L4 BULK	
0.33	J01	2.5	6.5	7.2	12	MMK5 334K50J01L4 BULK	2.2	K04	6.0	12.0	10.5	5	MMK7.5 225K50K04L4 BULK	
0.39	J01	2.5	6.5	7.2	12	MMK5 394K50J01L4 BULK	2.7	K04	6.0	12.0	10.5	5	MMK7.5 275K50K04L4 BULK	
0.47	J01	2.5	6.5	7.2	12	MMK5 474K50J01L4 BULK	3.3	K04	6.0	12.0	10.5	5	MMK7.5 335K50K04L4 BULK	
0.56	J02	3.5	8.0	7.2	12	MMK5 564K50J02L4 BULK	LEAD SPACING 10 MM							
0.68	J02	3.5	8.0	7.2	12	MMK5 684K50J02L4 BULK	1.0	A01	4.0	9.0	13.0	4	MMK10 105K50A01L4 BULK	
0.82	J02	3.5	8.0	7.2	12	MMK5 824K50J02L4 BULK	1.2	A01	4.0	9.0	13.0	4	MMK10 125K50A01L4 BULK	
1.0	J02	3.5	8.0	7.2	12	MMK5 105K50J02L4 BULK	1.5	A02	4.5	10.5	13.0	4	MMK10 155K50A02L4 BULK	
1.2	J03	4.5	9.0	7.2	12	MMK5 125K50J03L4 BULK	1.8	A03	5.0	11.0	13.0	4	MMK10 185K50A03L4 BULK	
1.5	J03	4.5	9.0	7.2	12	MMK5 155K50J03L4 BULK	2.2	A03	5.0	11.0	13.0	4	MMK10 225K50A03L4 BULK	
1.8	J04	5.0	10.0	7.2	12	MMK5 185K50J04L4 BULK	2.7	A04	6.0	12.0	13.0	4	MMK10 275K50A04L4 BULK	
2.2	J04	5.0	10.0	7.2	12	MMK5 225K50J04L4 BULK	LEAD SPACING 15 MM							
2.7	J05	6.0	11.0	7.2	12	MMK5 275K50J05L4 BULK	2.0	B04	5.5	10.5	18.0	3	MMK15 205K50B04L4 BULK	
3.3	J05	6.0	11.0	7.2	12	MMK5 335K50J05L4 BULK	2.2	B04	5.5	10.5	18.0	3	MMK15 225K50B04L4 BULK	
3.9	J06	7.2	13.0	7.2	12	MMK5 395K50J06L4 BULK	2.7	B05	5.5	12.5	18.0	3	MMK15 275K50B05L4 BULK	
4.7	J06	7.2	13.0	7.2	12	MMK5 475K50J06L4 BULK	3.3	B05	5.5	12.5	18.0	3	MMK15 335K50B05L4 BULK	
5.6	J06	7.2	13.0	7.2	12	MMK5 565K50J06L4 BULK	3.9	B10	6.5	12.5	18.0	3	MMK15 395K50B10L4 BULK	
6.0	J06	7.2	13.0	7.2	12	MMK5 605K50J06L4 BULK	4.7	B06	7.5	14.5	18.0	3	MMK15 475K50B06L4 BULK	
LEAD SPACING 7.5 MM							5.6	B06	7.5	14.5	18.0	3	MMK15 565K50B06L4 BULK	
0.0010	K00	2.5	6.0	10.0	5	MMK7.5 102K50K00L4 BULK	6.8	B12	8.0	15.0	18.0	3	MMK15 685K50B12L4 BULK	
0.0012	K00	2.5	6.0	10.0	5	MMK7.5 122K50K00L4 BULK	8.2	B11	8.5	16.0	18.0	3	MMK15 825K50B11L4 BULK	
0.0015	K00	2.5	6.0	10.0	5	MMK7.5 152K50K00L4 BULK	10.0	B14	9.5	17.5	18.0	3	MMK15 106K50B14L4 BULK	
0.0018	K00	2.5	6.0	10.0	5	MMK7.5 182K50K00L4 BULK								
0.0022	K00	2.5	6.0	10.0	5	MMK7.5 222K50K00L4 BULK								
0.0027	K00	2.5	6.0	10.0	5	MMK7.5 272K50K00L4 BULK								
0.0033	K00	2.5	6.0	10.0	5	MMK7.5 332K50K00L4 BULK								
0.0039	K00	2.5	6.0	10.0	5	MMK7.5 392K50K00L4 BULK								
0.0047	K00	2.5	6.0	10.0	5	MMK7.5 472K50K00L4 BULK								
0.0056	K00	2.5	6.0	10.0	5	MMK7.5 562K50K00L4 BULK								

ARTICLE TABLE

Capaci- tance μF	Box code	Max dimen- sions in mm			Max dU/dt V/ μs	Article code		Capaci- tance μF	Box code	Max dimen- sions in mm			Max dU/dt V/ μs	Article code
		B	H	L						B	H	L		
63 VDC/40 VAC							63 VDC/40 VAC							
LEAD SPACING 10 MM							LEAD SPACING 37.5 MM							
0.56	A01	4.0	9.0	13.0	8	MMK10 564K63A01L4 BULK	27	R05	13.0	24.0	41.0	1	MMK37.5 276K63R05L4 TRAY	
0.68	A01	4.0	9.0	13.0	8	MMK10 684K63A01L4 BULK	33	R04	15.0	26.0	41.0	1	MMK37.5 336K63R04L4 TRAY	
0.82	A01	4.0	9.0	13.0	8	MMK10 824K63A01L4 BULK	39	R04	15.0	26.0	41.0	1	MMK37.5 396K63R04L4 TRAY	
1.0	A02	4.5	10.5	13.0	8	MMK10 105K63A02L4 BULK	47	R02	16.5	32.0	41.0	1	MMK37.5 476K63R02L4 TRAY	
1.2	A02	4.5	10.5	13.0	8	MMK10 125K63A02L4 BULK	56	R03	19.0	36.0	41.0	1	MMK37.5 566K63R03L4 TRAY	
1.5	A03	5.0	11.0	13.0	8	MMK10 155K63A03L4 BULK	68	R03	19.0	36.0	41.0	1	MMK37.5 686K63R03L4 TRAY	
1.8	A04	6.0	12.0	13.0	8	MMK10 185K63A04L4 BULK	82	R06	21.0	38.0	41.0	1	MMK37.5 826K63R06L4 TRAY	
2.2	A04	6.0	12.0	13.0	8	MMK10 225K63A04L4 BULK								
LEAD SPACING 15 MM							100 VDC/63 VAC							
LEAD SPACING 5 MM							LEAD SPACING 5 MM							
0.68	B04	5.5	10.5	18.0	5	MMK15 684K63B04L4 BULK	0.0010	J01	2.5	6.5	7.2	30	MMK5 102K100J01L4 BULK	
0.82	B04	5.5	10.5	18.0	5	MMK15 824K63B04L4 BULK	0.0012	J01	2.5	6.5	7.2	30	MMK5 122K100J01L4 BULK	
1.0	B04	5.5	10.5	18.0	5	MMK15 105K63B04L4 BULK	0.0015	J01	2.5	6.5	7.2	30	MMK5 152K100J01L4 BULK	
1.2	B04	5.5	10.5	18.0	5	MMK15 125K63B04L4 BULK	0.0018	J01	2.5	6.5	7.2	30	MMK5 182K100J01L4 BULK	
1.5	B04	5.5	10.5	18.0	5	MMK15 155K63B04L4 BULK	0.0022	J01	2.5	6.5	7.2	30	MMK5 222K100J01L4 BULK	
1.8	B04	5.5	10.5	18.0	5	MMK15 185K63B04L4 BULK	0.0027	J01	2.5	6.5	7.2	30	MMK5 272K100J01L4 BULK	
2.0	B05	5.5	12.5	18.0	5	MMK15 205K63B05L4 BULK	0.0033	J01	2.5	6.5	7.2	30	MMK5 332K100J01L4 BULK	
2.2	B05	5.5	12.5	18.0	5	MMK15 225K63B05L4 BULK	0.0039	J01	2.5	6.5	7.2	30	MMK5 392K100J01L4 BULK	
2.7	B10	6.5	12.5	18.0	5	MMK15 275K63B10L4 BULK	0.0047	J01	2.5	6.5	7.2	30	MMK5 472K100J01L4 BULK	
3.3	B10	6.5	12.5	18.0	5	MMK15 335K63B10L4 BULK	0.0056	J01	2.5	6.5	7.2	30	MMK5 562K100J01L4 BULK	
3.9	B06	7.5	14.5	18.0	5	MMK15 395K63B06L4 BULK	0.0068	J01	2.5	6.5	7.2	30	MMK5 682K100J01L4 BULK	
4.7	B06	7.5	14.5	18.0	5	MMK15 475K63B06L4 BULK	0.0082	J01	2.5	6.5	7.2	30	MMK5 822K100J01L4 BULK	
5.6	B11	8.5	16.0	18.0	5	MMK15 565K63B11L4 BULK	0.010	J01	2.5	6.5	7.2	30	MMK5 103K100J01L4 BULK	
6.8	B14	9.5	17.5	18.0	5	MMK15 685K63B14L4 BULK	0.012	J01	2.5	6.5	7.2	30	MMK5 123K100J01L4 BULK	
LEAD SPACING 22.5 MM							LEAD SPACING 7.5 MM							
3.3	D13	6.5	14.5	26.0	3	MMK22.5 335K63D13L4 TRAY	0.022	J01	2.5	6.5	7.2	30	MMK5 223K100J01L4 BULK	
3.9	D13	6.5	14.5	26.0	3	MMK22.5 395K63D13L4 TRAY	0.027	J01	2.5	6.5	7.2	30	MMK5 273K100J01L4 BULK	
4.7	D13	6.5	14.5	26.0	3	MMK22.5 475K63D13L4 TRAY	0.033	J01	2.5	6.5	7.2	30	MMK5 333K100J01L4 BULK	
5.6	D17	7.0	16.5	26.0	3	MMK22.5 565K63D17L4 TRAY	0.039	J01	2.5	6.5	7.2	30	MMK5 393K100J01L4 BULK	
6.8	D17	7.0	16.5	26.0	3	MMK22.5 685K63D17L4 TRAY	0.047	J01	2.5	6.5	7.2	30	MMK5 473K100J01L4 BULK	
8.2	D14	8.0	16.0	26.0	3	MMK22.5 825K63D14L4 TRAY	0.056	J01	2.5	6.5	7.2	30	MMK5 563K100J01L4 BULK	
10	D15	9.0	18.5	26.0	3	MMK22.5 106K63D15L4 TRAY	0.068	J01	2.5	6.5	7.2	30	MMK5 683K100J01L4 BULK	
12	D18	10.5	19.0	26.0	3	MMK22.5 126K63D18L4 TRAY	0.082	J01	2.5	6.5	7.2	30	MMK5 823K100J01L4 BULK	
15	D16	11.0	21.5	26.0	3	MMK22.5 156K63D16L4 TRAY	0.10	J01	2.5	6.5	7.2	30	MMK5 104K100J01L4 BULK	
18	D20	13.5	23.0	26.0	3	MMK22.5 186K63D20L4 TRAY	0.12	J02	3.5	8.0	7.2	30	MMK5 124K100J02L4 BULK	
22	D19	15.5	24.5	26.0	3	MMK22.5 226K63D19L4 TRAY	0.15	J02	3.5	8.0	7.2	30	MMK5 154K100J02L4 BULK	
8.2	F11	10.5	20.5	31.5	2	MMK27.5 825K63F11L4 TRAY	0.18	J02	3.5	8.0	7.2	30	MMK5 184K100J02L4 BULK	
10	F11	10.5	20.5	31.5	2	MMK27.5 106K63F11L4 TRAY	0.22	J02	3.5	8.0	7.2	30	MMK5 224K100J02L4 BULK	
12	F11	10.5	20.5	31.5	2	MMK27.5 126K63F11L4 TRAY	0.27	J03	4.5	9.0	7.2	30	MMK5 274K100J03L4 BULK	
15	F12	11.5	22.5	31.5	2	MMK27.5 156K63F12L4 TRAY	0.33	J03	4.5	9.0	7.2	30	MMK5 334K100J03L4 BULK	
15	F17	21.0	12.5	31.5	2	MMK27.5 156K63F17L4 TRAY	0.39	J04	5.0	10.0	7.2	30	MMK5 394K100J04L4 BULK	
18	F12	11.5	22.5	31.5	2	MMK27.5 186K63F12L4 TRAY	0.47	J04	5.0	10.0	7.2	30	MMK5 474K100J04L4 BULK	
22	F13	14.5	24.5	31.5	2	MMK27.5 226K63F13L4 TRAY	0.56	J05	6.0	11.0	7.2	30	MMK5 564K100J05L4 BULK	
27	F14	17.5	28.0	31.5	2	MMK27.5 276K63F14L4 TRAY	0.68	J05	6.0	11.0	7.2	30	MMK5 684K100J05L4 BULK	
33	F14	17.5	28.0	31.5	2	MMK27.5 336K63F14L4 TRAY	0.82	J06	7.2	13.0	7.2	30	MMK5 824K100J06L4 BULK	
33	F19	27.5	16.0	31.5	2	MMK27.5 336K63F19L4 TRAY	1.0	J06	7.2	13.0	7.2	30	MMK5 105K100J06L4 BULK	
39	F15	19.0	29.0	31.5	2	MMK27.5 396K63F15L4 TRAY								
47	F16	21.0	30.0	31.5	2	MMK27.5 476K63F16L4 TRAY								
47	F18	31.0	19.0	31.5	2	MMK27.5 476K63F18L4 TRAY								

ARTICLE TABLE

Capaci- Box Max dimen- Max
tance code sions in mm dU/dt
 μF B H L V/ μs Article code

Capaci- Box Max dimen- Max
tance code sions in mm dU/dt
 μF B H L V/ μs Article code

100 VDC/63 VAC

250 VDC/160 VAC

LEAD SPACING 37.5 MM

LEAD SPACING 7.5 MM

Table with 8 columns: Article code, Capaci- μF , Box code, Max dimen- B, Max dimen- H, Max dimen- L, Max dU/dt V/ μs , Article code. Rows 12-100.

Table with 8 columns: Article code, Capaci- μF , Box code, Max dimen- B, Max dimen- H, Max dimen- L, Max dU/dt V/ μs , Article code. Rows 0.012-0.33.

250 VDC/160 VAC

LEAD SPACING 5 MM

LEAD SPACING 10 MM

Table with 8 columns: Article code, Capaci- μF , Box code, Max dimen- B, Max dimen- H, Max dimen- L, Max dU/dt V/ μs , Article code. Rows 0.0010-0.22.

Table with 8 columns: Article code, Capaci- μF , Box code, Max dimen- B, Max dimen- H, Max dimen- L, Max dU/dt V/ μs , Article code. Rows 0.0010-0.39.

LEAD SPACING 7.5 MM

LEAD SPACING 15 MM

Table with 8 columns: Article code, Capaci- μF , Box code, Max dimen- B, Max dimen- H, Max dimen- L, Max dU/dt V/ μs , Article code. Rows 0.0010-0.010.

Table with 8 columns: Article code, Capaci- μF , Box code, Max dimen- B, Max dimen- H, Max dimen- L, Max dU/dt V/ μs , Article code. Rows 0.082-0.27.

Updated since the latest printed catalogue

ARTICLE TABLE

Capacitance μF	Box code	Max dimensions in mm			Max dU/dt $\text{V}/\mu\text{s}$	Article code	Capacitance μF	Box code	Max dimensions in mm			Max dU/dt $\text{V}/\mu\text{s}$	Article code				
		B	H	L					B	H	L						
630 VDC/220 VAC						630 VDC/220 VAC											
LEAD SPACING 7.5 MM						LEAD SPACING 15 MM											
0.0010	K00	2.5	6.0	10.0	60	MMK7.5	102K630K00L4	BULK	0.15	B06	7.5	14.5	18.0	25	MMK15	154K630B06L4	BULK
0.0012	K00	2.5	6.0	10.0	60	MMK7.5	122K630K00L4	BULK	0.18	B12	8.0	15.0	18.0	25	MMK15	184K630B12L4	BULK
0.0015	K00	2.5	6.0	10.0	60	MMK7.5	152K630K00L4	BULK	0.22	B14	9.5	17.5	18.0	25	MMK15	224K630B14L4	BULK
0.0018	K00	2.5	6.0	10.0	60	MMK7.5	182K630K00L4	BULK	LEAD SPACING 22.5 MM								
0.0022	K00	2.5	6.0	10.0	60	MMK7.5	222K630K00L4	BULK	0.082	D13	6.5	14.5	26.0	12	MMK22.5	823K630D13L4	TRAY
0.0027	K00	2.5	6.0	10.0	60	MMK7.5	272K630K00L4	BULK	0.10	D13	6.5	14.5	26.0	12	MMK22.5	104K630D13L4	TRAY
0.0033	K00	2.5	6.0	10.0	60	MMK7.5	332K630K00L4	BULK	0.12	D13	6.5	14.5	26.0	12	MMK22.5	124K630D13L4	TRAY
0.0039	K00	2.5	6.0	10.0	60	MMK7.5	392K630K00L4	BULK	0.15	D13	6.5	14.5	26.0	12	MMK22.5	154K630D13L4	TRAY
0.0047	K01	4.0	8.0	10.0	60	MMK7.5	472K630K01L4	BULK	0.18	D17	7.0	16.5	26.0	12	MMK22.5	184K630D17L4	TRAY
0.0056	K01	4.0	8.0	10.0	60	MMK7.5	562K630K01L4	BULK	0.22	D17	7.0	16.5	26.0	12	MMK22.5	224K630D17L4	TRAY
0.0068	K01	4.0	8.0	10.0	60	MMK7.5	682K630K01L4	BULK	0.27	D14	8.0	16.0	26.0	12	MMK22.5	274K630D14L4	TRAY
0.0082	K01	4.0	8.0	10.0	60	MMK7.5	822K630K01L4	BULK	0.33	D15	9.0	18.5	26.0	12	MMK22.5	334K630D15L4	TRAY
0.010	K01	4.0	8.0	10.0	60	MMK7.5	103K630K01L4	BULK	0.39	D18	10.5	19.0	26.0	12	MMK22.5	394K630D18L4	TRAY
0.012	K01	4.0	8.0	10.0	60	MMK7.5	123K630K01L4	BULK	0.47	D16	11.0	21.5	26.0	12	MMK22.5	474K630D16L4	TRAY
0.015	K03	5.0	11.0	10.0	60	MMK7.5	153K630K03L4	BULK	0.56	D20	13.5	23.0	26.0	12	MMK22.5	564K630D20L4	TRAY
0.018	K03	5.0	11.0	10.0	60	MMK7.5	183K630K03L4	BULK	0.68	D20	13.5	23.0	26.0	12	MMK22.5	684K630D20L4	TRAY
0.022	K03	5.0	11.0	10.0	60	MMK7.5	223K630K03L4	BULK	0.82	D19	15.5	24.5	26.0	12	MMK22.5	824K630D19L4	TRAY
0.027	K03	5.0	11.0	10.0	60	MMK7.5	273K630K03L4	BULK	LEAD SPACING 27.5 MM								
0.033	K04	6.0	12.0	10.5	60	MMK7.5	333K630K04L4	BULK	0.33	F11	10.5	20.5	31.5	10	MMK27.5	334K630F11L4	TRAY
0.039	K04	6.0	12.0	10.5	60	MMK7.5	393K630K04L4	BULK	0.39	F11	10.5	20.5	31.5	10	MMK27.5	394K630F11L4	TRAY
LEAD SPACING 10 MM						LEAD SPACING 37.5 MM											
0.0010	A01	4.0	9.0	13.0	40	MMK10	102K630A01L4	BULK	0.47	F11	10.5	20.5	31.5	10	MMK27.5	474K630F11L4	TRAY
0.0012	A01	4.0	9.0	13.0	40	MMK10	122K630A01L4	BULK	0.56	F11	10.5	20.5	31.5	10	MMK27.5	564K630F11L4	TRAY
0.0015	A01	4.0	9.0	13.0	40	MMK10	152K630A01L4	BULK	0.56	F17	21.0	12.5	31.5	10	MMK27.5	564K630F17L4	TRAY
0.0018	A01	4.0	9.0	13.0	40	MMK10	182K630A01L4	BULK	0.68	F12	11.5	22.5	31.5	10	MMK27.5	684K630F12L4	TRAY
0.0022	A01	4.0	9.0	13.0	40	MMK10	222K630A01L4	BULK	0.82	F03	13.5	23.0	31.5	10	MMK27.5	824K630F03L4	TRAY
0.0027	A01	4.0	9.0	13.0	40	MMK10	272K630A01L4	BULK	1.0	F13	14.5	24.5	31.5	10	MMK27.5	105K630F13L4	TRAY
0.0033	A01	4.0	9.0	13.0	40	MMK10	332K630A01L4	BULK	1.2	F14	17.5	28.0	31.5	10	MMK27.5	125K630F14L4	TRAY
0.0039	A01	4.0	9.0	13.0	40	MMK10	392K630A01L4	BULK	1.5	F14	17.5	28.0	31.5	10	MMK27.5	155K630F14L4	TRAY
0.0047	A01	4.0	9.0	13.0	40	MMK10	472K630A01L4	BULK	1.5	F19	27.5	16.0	31.5	10	MMK27.5	155K630F19L4	TRAY
0.0056	A01	4.0	9.0	13.0	40	MMK10	562K630A01L4	BULK	1.8	F15	19.0	29.0	31.5	10	MMK27.5	185K630F15L4	TRAY
0.0068	A01	4.0	9.0	13.0	40	MMK10	682K630A01L4	BULK	2.2	F16	21.0	30.0	31.5	10	MMK27.5	225K630F16L4	TRAY
0.0078	A01	4.0	9.0	13.0	40	MMK10	782K630A01L4	BULK	2.2	F18	31.0	19.0	31.5	10	MMK27.5	225K630F18L4	TRAY
0.0082	A01	4.0	9.0	13.0	40	MMK10	822K630A01L4	BULK	LEAD SPACING 37.5 MM								
0.010	A01	4.0	9.0	13.0	40	MMK10	103K630A01L4	BULK	0.82	R05	13.0	24.0	41.0	8	MMK37.5	824K630R05L4	TRAY
0.012	A01	4.0	9.0	13.0	40	MMK10	123K630A01L4	BULK	1.0	R05	13.0	24.0	41.0	8	MMK37.5	105K630R05L4	TRAY
0.015	A01	4.0	9.0	13.0	40	MMK10	153K630A01L4	BULK	1.2	R05	13.0	24.0	41.0	8	MMK37.5	125K630R05L4	TRAY
0.018	A01	4.0	9.0	13.0	40	MMK10	183K630A01L4	BULK	1.5	R04	15.0	26.0	41.0	8	MMK37.5	155K630R04L4	TRAY
0.022	A01	4.0	9.0	13.0	40	MMK10	223K630A01L4	BULK	1.8	R04	15.0	26.0	41.0	8	MMK37.5	185K630R04L4	TRAY
0.027	A02	4.5	10.5	13.0	40	MMK10	273K630A02L4	BULK	2.2	R02	16.5	32.0	41.0	8	MMK37.5	225K630R02L4	TRAY
0.033	A02	4.5	10.5	13.0	40	MMK10	333K630A02L4	BULK	2.7	R03	19.0	36.0	41.0	8	MMK37.5	275K630R03L4	TRAY
0.039	A03	5.0	11.0	13.0	40	MMK10	393K630A03L4	BULK	3.3	R03	19.0	36.0	41.0	8	MMK37.5	335K630R03L4	TRAY
0.047	A04	6.0	12.0	13.0	40	MMK10	473K630A04L4	BULK	3.9	R06	21.0	38.0	41.0	8	MMK37.5	395K630R06L4	TRAY
0.056	A04	6.0	12.0	13.0	40	MMK10	563K630A04L4	BULK	4.7	R06	21.0	38.0	41.0	8	MMK37.5	475K630R06L4	TRAY
LEAD SPACING 15 MM						LEAD SPACING 37.5 MM											
0.027	B04	5.5	10.5	18.0	25	MMK15	273K630B04L4	BULK	5.6	R08	28.0	43.0	41.0	8	MMK37.5	565K630R08L4	TRAY
0.033	B04	5.5	10.5	18.0	25	MMK15	333K630B04L4	BULK	6.8	R08	28.0	43.0	41.0	8	MMK37.5	685K630R08L4	TRAY
0.039	B04	5.5	10.5	18.0	25	MMK15	393K630B04L4	BULK									
0.047	B04	5.5	10.5	18.0	25	MMK15	473K630B04L4	BULK									
0.056	B04	5.5	10.5	18.0	25	MMK15	563K630B04L4	BULK									
0.068	B05	5.5	12.5	18.0	25	MMK15	683K630B05L4	BULK									
0.082	B10	6.5	12.5	18.0	25	MMK15	823K630B10L4	BULK									
0.10	B10	6.5	12.5	18.0	25	MMK15	104K630B10L4	BULK									
0.12	B06	7.5	14.5	18.0	25	MMK15	124K630B06L4	BULK									

