

RoHS **BLN Series** Fibre Body Fast-acting Midget / 5AG Size Fuse



### Description

Fibertube, 250 V BLN Fuses provide low-cost protection for military applications and control circuits.

### Electrical Characteristics for Series

% of Ampere Rating	Ampere Rating	Opening Time
100%	0-30	Until temp stabilizes
135%	0-30	1 hours, Maximum
200%	0-30	2 minutes, Maximum


### Agency Approvals

Agency	Agency File Number	Ampere Range
	E10480	1.0 - 30A
	LR2 9862	1.0 - 30A
	NBK170305-E10480A-D	1.0 - 30A


### Electrical Specifications by Item

Ordering Number	Amp Rating (A)	Max Voltage Rating (V)	Interrupting Rating	Nominal Cold Resistance (Ohms)	Agency Approvals		
<b>BLN 001</b>	1	250	10,000 amperes at 250 VAC.	.395	x	x	x
<b>BLN 01.5</b>	1.5			.222	x	x	x
<b>BLN 002</b>	2			.125	x	x	x
<b>BLN 003</b>	3			.0645	x	x	x
<b>BLN 004</b>	4			.0432	x	x	x
<b>BLN 005</b>	5			.0413	x	x	x
<b>BLN 006.</b>	6			.0284	x	x	x
<b>BLN 008</b>	8			.0166	x	x	x
<b>BLN 010</b>	10			.011	x	x	x
<b>BLN 012</b>	12			.00920	x	x	x
<b>BLN 015</b>	15			.00684	x	x	x
<b>BLN 020</b>	20			.0036	x	x	x
<b>BLN 025</b>	25			.00360	x	x	x
<b>BLN 030</b>	30			.00270	x	x	x

Temperature Derating Curve

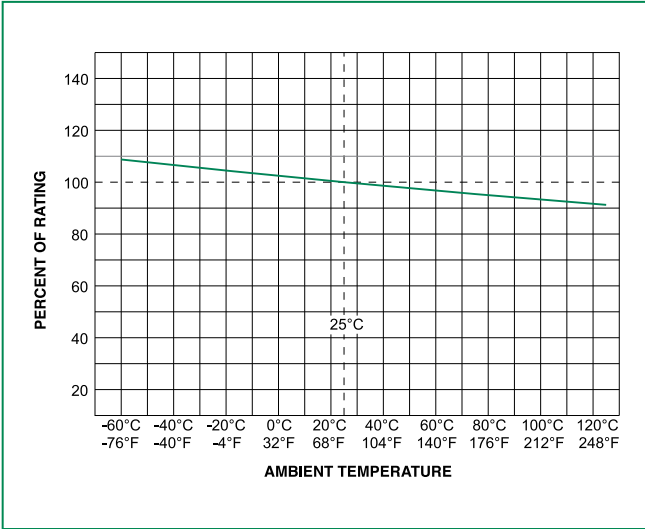

Average Time Current Curves

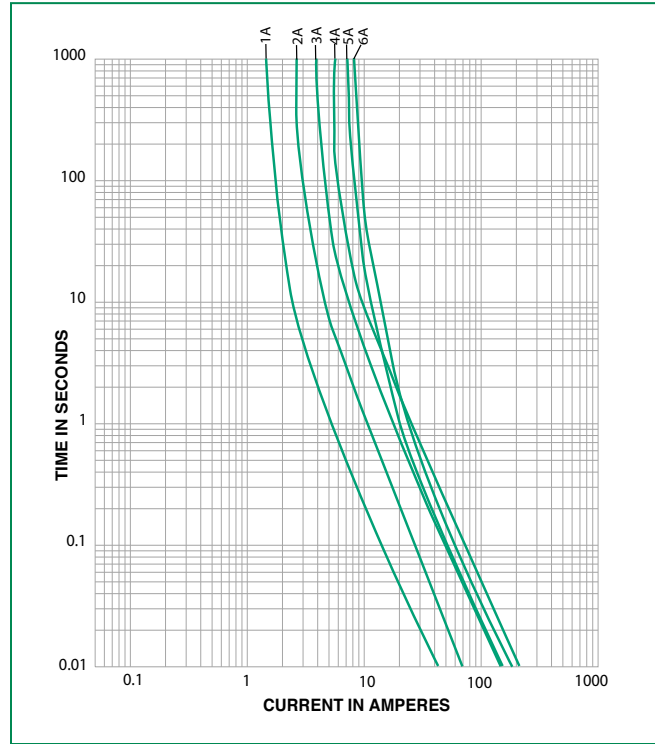

Dimensions

