


Ferrite Beads

Special Features

- Excellent EMI suppression capability at high frequency
- Very low cost
- Higher impedance can be achieved with 2 or more beads in series
- Wider frequency range can be achieved with 2 beads of different material grade in series

| FB Series | | | | | |
|-------------|----------|---------------------------|------------------|------------------|------------------|
| Part Number | Material | Suggest Freq. Range (MHz) | Dim. A (min/max) | Dim. B (min/max) | Dim. C (min/max) |
| FB73-085 | 73 | Up to 40 | 0.052/0.056 | 0.027/0.031 | 0.085/0.095 |
| FB43-226 | 43 | 40 - 200 | 0.123/0.153 | 0.040/0.060 | 0.221/0.251 |
| FB73-226 | 73 | Up to 40 | 0.125/0.155 | 0.040/0.060 | 0.221/0.251 |
| FB43-110 | 43 | 40 - 200 | 0.125/0.155 | 0.040/0.060 | 0.113/0.143 |
| FB64-110 | 64 | 200 and up | 0.125/0.155 | 0.040/0.060 | 0.113/0.143 |
| FB73-110 | 73 | Up to 40 | 0.123/0.153 | 0.040/0.060 | 0.113/0.143 |
| FB43-422 | 43 | 40 - 200 | 0.185/0.215 | 0.050/0.070 | 0.412/0.462 |
| FB73-422 | 73 | Up to 40 | 0.185/0.215 | 0.050/0.070 | 0.412/0.462 |
| FB43-287 | 43 | 40 - 200 | 0.281/0.311 | 0.084/0.104 | 0.282/0.312 |
| FB73-287 | 73 | Up to 40 | 0.281/0.311 | 0.084/0.104 | 0.282/0.312 |

Also available as RoHS compliant.

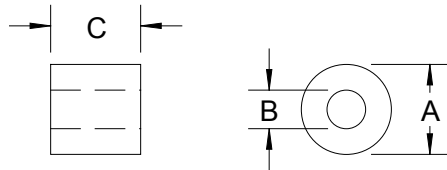

Dimensions: Inches