




# ADSL POTS LOW PASS FILTER FOR CUSTOMER PREMISES




-  Compatible with all ADSL coding schemes
-  Meets ANSI T1.413 and ITU-T G.992.1 (G.DMT) standards
-  Compact package, includes connectors for ease of installation

## Mechanical

### Electrical Specifications @ 25°C – Operating Temperature -40°C to 85°C

Tested with up to:	100 mA DC Current
Impedance (Line and Phone Ports)	600 Ω
DCR each line	10 Ω MAX
Filter Characteristics	POTS/Loops/Modem
Voice Band Delay Distortion	200 μSec MAX
POTS Splitter 1 kHz Insertion Loss	0.75 dB MAX
200 Hz to 3.4 kHz I/L, Long Loop	+ .5 to -1.5 dB
3.4 kHz to 4 kHz I/L, Long Loop	+1.0 to -1.5 dB
-3dB Frequency (TYP)	14 kHz
Return Loss: (reference impedance)	ZNL-r (RT)
200 Hz: Long Loop (single frequency)	13 dB MIN
1000 Hz: Long Loop (single frequency)	10 dB MIN
2200 Hz: Long Loop (single frequency)	6.0 dB MIN
3400 Hz: Long Loop (single frequency)	4.5 dB MIN
POTS Longitudinal Balance	>53 dB
POTS Tip to Ring Capacitance	<115 nF
ADSL Attenuation (30 kHz - 1.1 MHz)	65 dB MIN
ADSL Disruption (30 kHz - 1.1 MHz)	0.25 dB MIN
High Frequency Disruption (2-10 MHz)	1.0 dB MAX

### B2039A

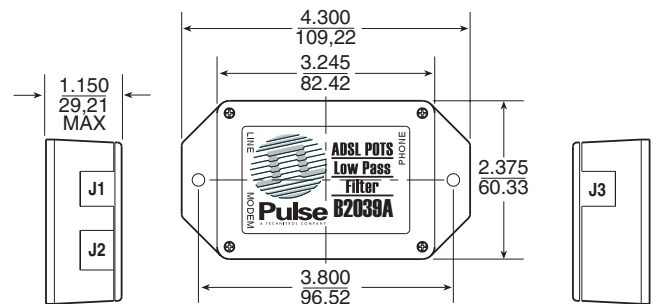


Connector	Function	Style	Tip	Ring
J1	Line	RJ11	Pin 3	Pin 4
J2	Modem	RJ45	Pin 4	Pin 5
J3	Phone	RJ11	Pin 3	Pin 4

**NOTE:** 2nd and 3rd pair Line Connections on J1 to J3 are unfiltered.




RJ11



RJ45


## Frequency Response

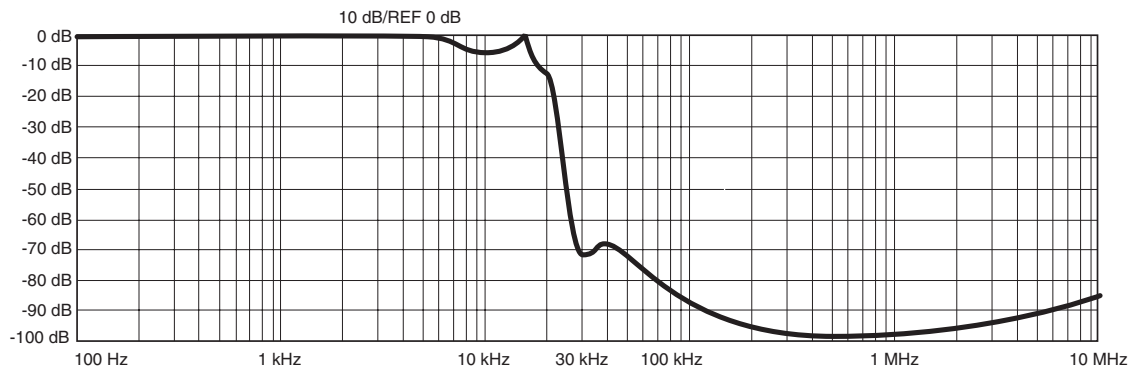

## For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (China/Hong Kong)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX: 65 280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	19/F, China United Plaza 1008 Tai Nan West Street Cheung Sha Wan, Kowloon Hong Kong, China Tel: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

 Printed on recycled paper. ©2002, Pulse Engineering, Inc.

**B905.C (3/02)**