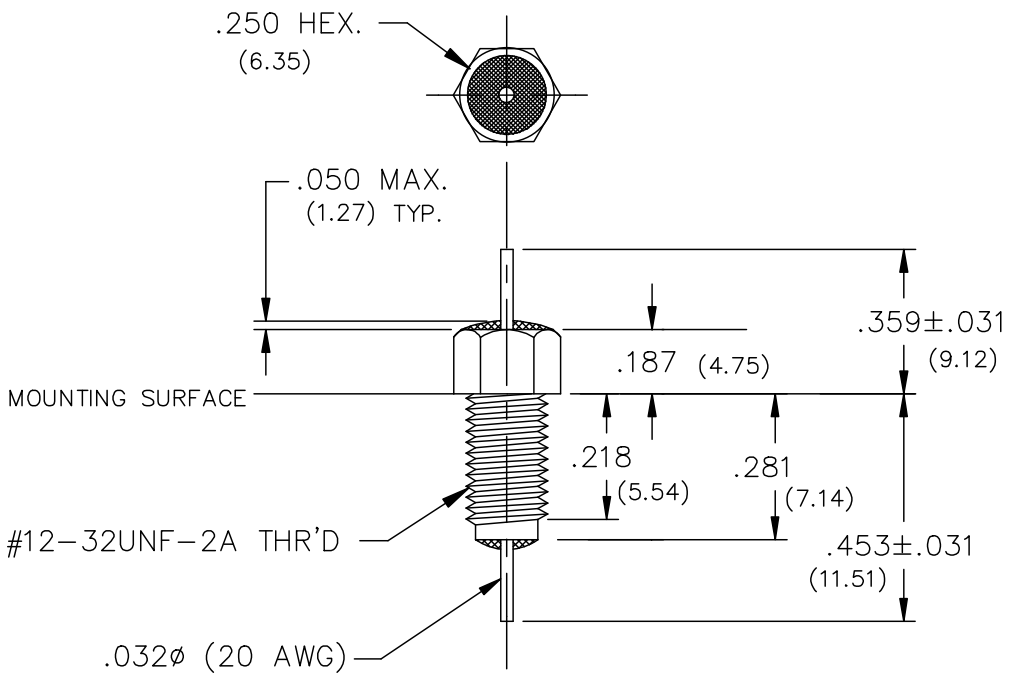

NOTE: 1) HARDWARE IS INCLUDED.
2) SUGGESTED MTG. HOLE .228 DIA.
3) THIS IS A LEAD FREE PART.
4) MAX REFLOW IS 245°C FOR 5 SEC.

LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	5500 pF GMV.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C 200 VDC MAX. 125°C 100 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	---
10	20
100	68
1 GHz	70
10 GHz	70

SCHEMATIC



MARKING:
PART:
SCI 1201F-066
BAG:
1201F-066
XXX DATE CODE
XXX QTY./BAG
(100/ BAG MAX.)

REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
00	Fractions ± 1/64
CN 18622-CPD	Dec. .xx±
CHANGE NOTICE	Dec. .xxx± .010
	Angles ±0° 30'
	CODE IDENT. NO. 0LSP2

SPECTRUM CONTROL INC.

ERIE, FAIRVIEW
PENNSYLVANIA

Dwn. KNOWLTON	Description
Ckd. 05/07/05	FILTER, SING, Pi, BSHG
Apvd. *	1201F-066
Scale NONE	

Downloaded from Elcodis.com electronic components distributor

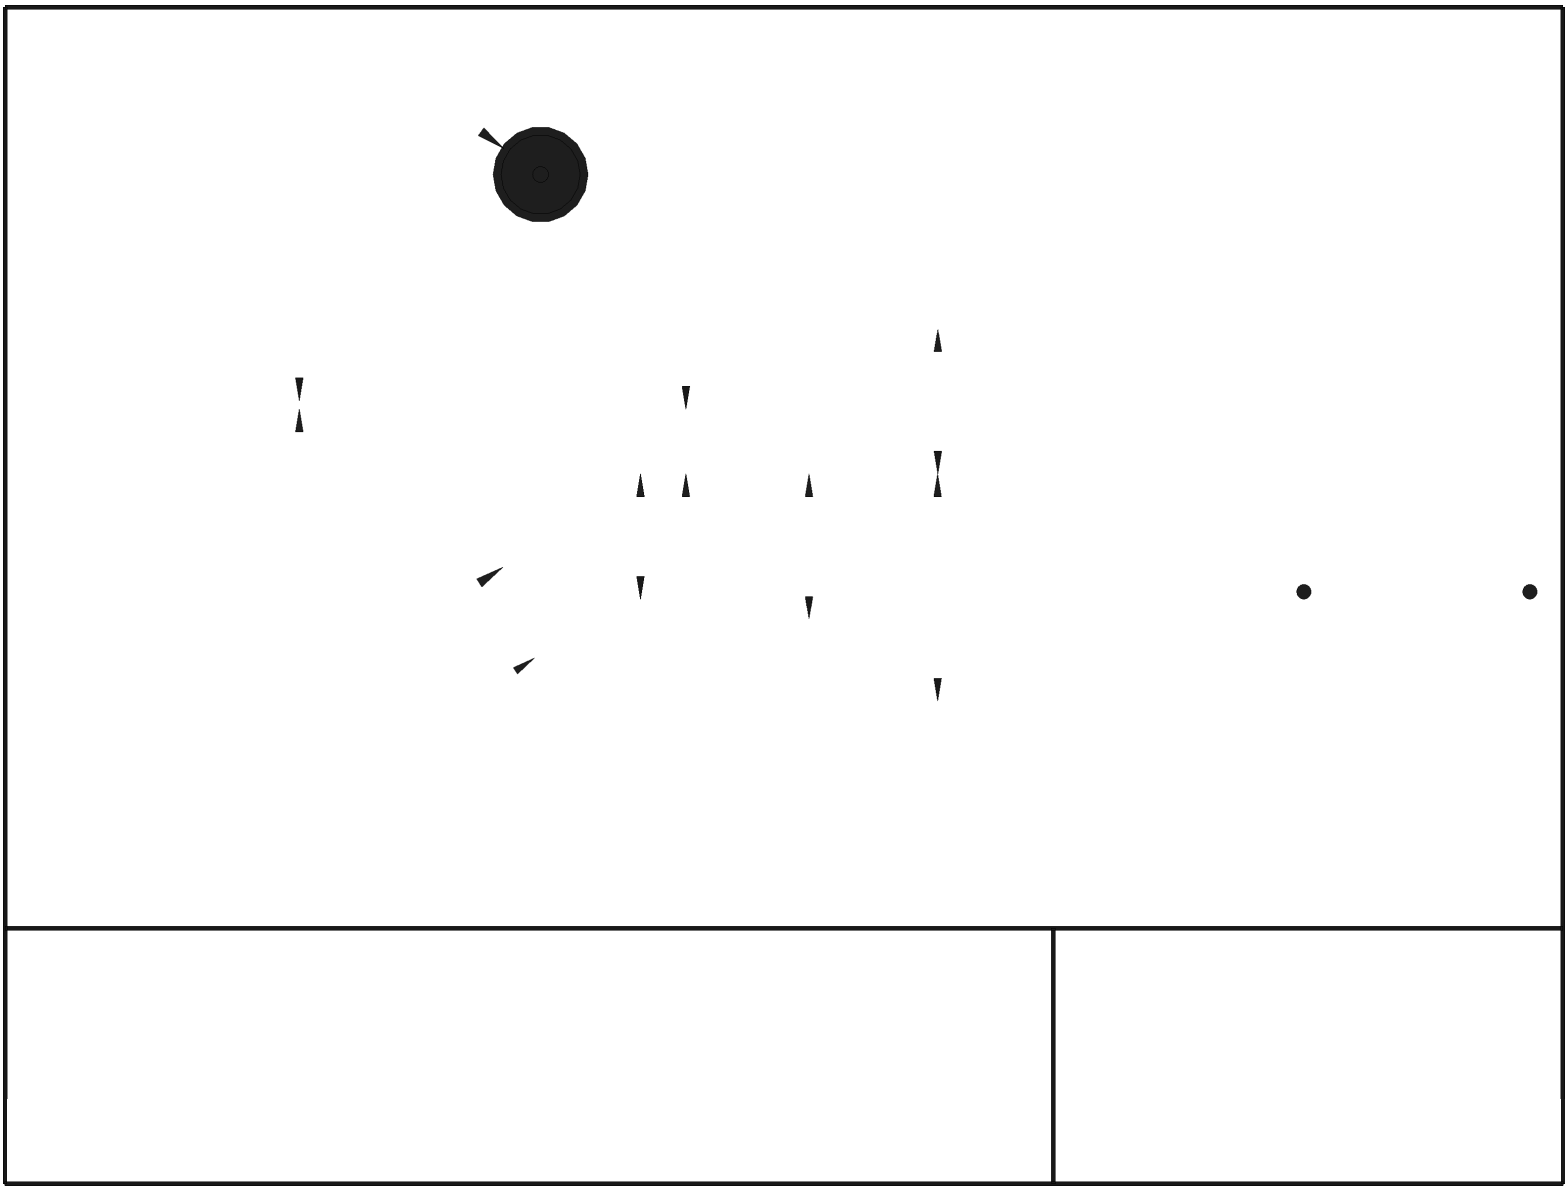

Downloaded from Elcodis.com electronic components distributor