

3-terminal Filters(SMD Array) For General Signal Line

Conformity to RoHS Directive

MEA Series MEA2010P Type

FEATURES

- This array type MEA2010P consists of 4-line SMD filters in one chip.
- Due to small low-profile size(L2.0×W1.0×T0.7mm), it is possible to correspond to the set of the compact size and high-density mounting.
- This type corresponds to a lead-free soldering method.

APPLICATIONS

Noise suppression for PCs, LCD panels, printers, game machines, cellular phones, DVCs, etc.

TEMPERATURE RANGES

Operating/Storage	-40 to +85°C
-------------------	--------------

PRODUCT IDENTIFICATION


MEA	2010	P	211R	T
(1)	(2)	(3)	(4)	(5)

- | | |
|------------------------|-----------------------------|
| (1)Series name | (4)Cutoff frequency (MHz) |
| (2)Dimensions L×W | 211R:fc=210MHz |
| (3) π type circuit | (5)Packaging style T:Taping |

PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	4000 pieces/reel

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM/RECOMMENDED PC BOARD PATTERN

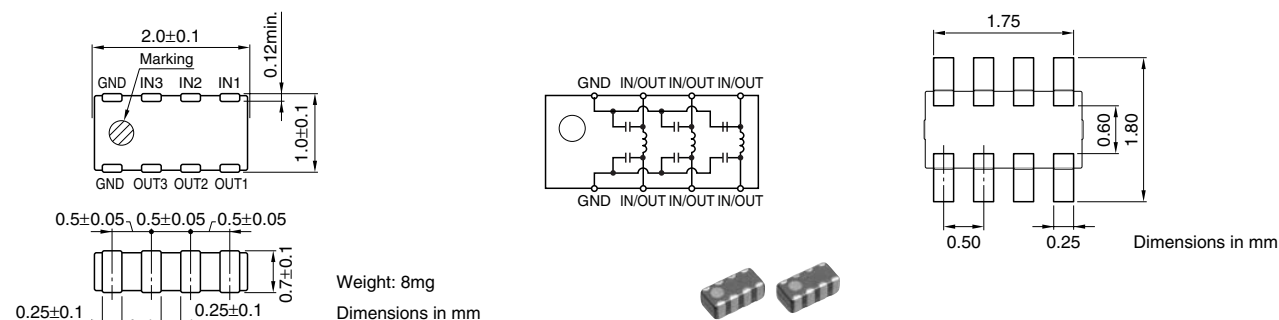


ELECTRICAL CHARACTERISTICS

Part No.	Cutoff frequency (MHz)typ.	Attenuation 20dB frequency range (MHz)	Rated voltage (V)max.	Rated current (mA)max.
MEA2010P181R	180	500 to 1000	6.3	50
MEA2010P211R	210	700 to 1500	6.3	50


TYPICAL ELECTRICAL CHARACTERISTICS

ATTENUATION vs. FREQUENCY CHARACTERISTICS

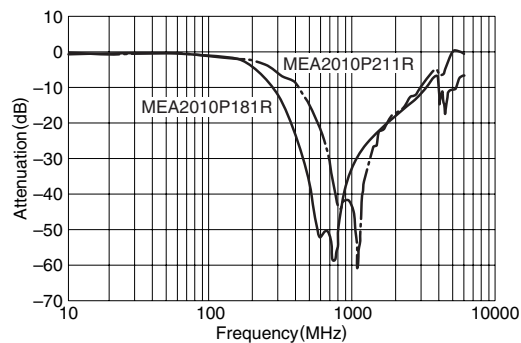

RECOMMENDED SOLDERING CONDITION

REFLOW SOLDERING

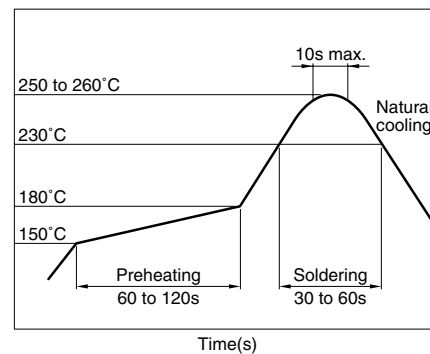

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application are considered the following:
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)

• All specifications are subject to change without notice.