


REV. 1 4/8/99
DCO 102124

COIL: @ 25°C	
RESISTANCE	7600 OHMS ± 10%
NOMINAL VOLTAGE	120.0 VDC
MUST OPERATE	65.0 VDC
MUST RELEASE	36.1 VDC MAX, 7.7 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C


NOTES: OPERATE & RELEASE 15 MS MAX.
CONTACT BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

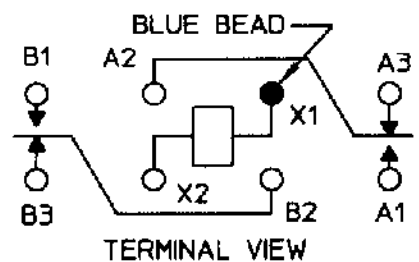

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 Hz RESISTIVE
	100,000 OPERATIONS

DR. R.B. 12/11/98 CK. *[Signature]*



CUST. QPL
CUST. NO. M5757/23-030

TYPE '07' RELAY

B07D034BE2-0135