



## Embedded Device Server

- ▶ Flexible, well-developed IP protocol stack
- ▶ TTL serial interface
- ▶ Two serial ports
- ▶ Accepts 5 VDC regulated input power
- ▶ HTTP, serial, Telnet and SNMP management
- ▶ Flash ROM for easy software upgrades
- ▶ Custom protocol support available
- ▶ 256-bit AES encryption for secure communications



## Build 10/100 Base-T Ethernet Connectivity into Your Products Quickly and Economically

The Lantronix Micro100 is a board-level product for OEM users who want to embed proven mainstream Ethernet connectivity in their products quickly and economically.

Building Ethernet connectivity into a product is no simple task. It requires a significant investment in hardware and software integration – often in areas outside of core competencies. So why build it yourself when there is a better alternative?

The Micro100 embedded device server provides an integrated solution to add proven Ethernet connectivity to an existing design quickly and economically, and with a high level of flexibility.

Device networking starts with a Device Server™. These amazing products enable most any device with serial capability (TTL) to become a fully functional member of an Ethernet network. Device Servers include all of the elements needed to network-enable your products – a processor, real-time operating

system (RTOS), a robust TCP/IP stack, a web server, and a network connection. All the connected product additionally needs is a header, providing connections to a power source and to a TTL serial port.

The Micro100 brings over a decade of device networking experience, rock-solid IP firmware, extensive applications support and advanced encryption standards to industrial and commercial environments.

Measuring only 49 x 40 mm the Micro100 can easily fit into almost any size serial device that would benefit from network connectivity. It includes a serial interface TTL connector and 10/100 Base-T Ethernet RJ45 jack. The Micro100 includes the same IP protocol stack found on the other Lantronix embedded products.

RoHS-compliant, the Micro100 meets Directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment.





## Features

### Protocols

ARP, UDP, TCP/IP, Telnet, ICMP, SNMP, DHCP, TFTP and HTTP

### Networking Interface

RJ45 (10/100Base-T) Ethernet

### Serial Interface

TTL level (Asynchronous)

### Data Rates

300 bps to 230 Kbps

### Serial Line Formats

Characters: 7 or 8 data bits

Stop bits: 1 or 2

Parity: odd, even, none

### Modem Controls

DTR, RTS, CTS, DCD

### Flow Control

XON/XOFF (Software)

CTS/RTS (Hardware)

### Management

HTTP

SNMP

Serial login

Telnet login

Security

Optional 256-bit AES

Password protection

### System Software

Flash ROM standard:

downloadable from a TCP/IP host (TFTP)

or over serial port

### Diagnostic LEDs

Serial Channel Status

Ethernet Link Status

Diagnostic Information

### Compatibility

Ethernet: Version 2.0/IEEE 802.3

### Power Requirements

5 VDC +/-5% at ~ 200 mA

### Memory

Flash: 512K

RAM: 256K - zero wait

### Environmental

Standard Temperature

0° to 70°C (32° to 158°F)


Storage Temperature

-40° to 85°C (-40° to 185°F)

### Physical Dimensions (W x H)

49 x 40 mm (1.929 x 1.575 in)

## Board Layout and Pinouts

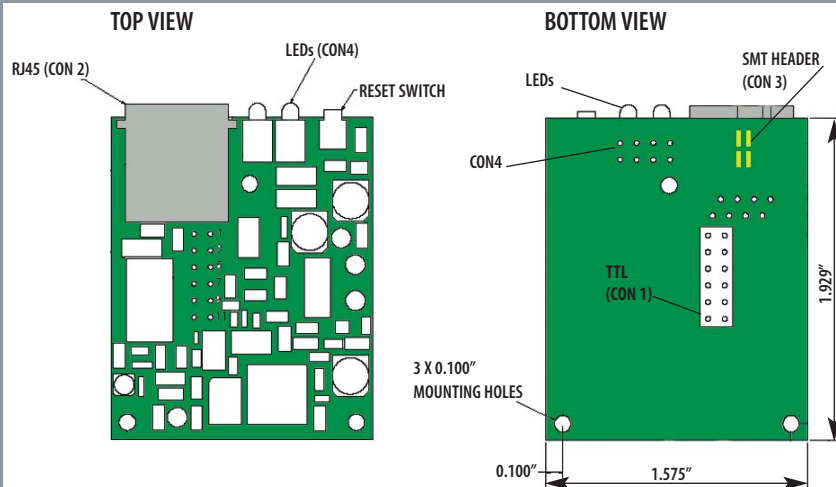

### CON1 (2 x 6 Pins)TTL

Pin	Function
1	+5V
2	GND
3	RXA (Input)
4	TXA (Output)
5	RTSA (Output)
6	DTRA (Output)
7	CTSA (Input)
8	DCDA (Input)
9	R/V/A (Output)
10	RESET
11	RXB (Input)
12	TXB (Output)

### CON2 (RJ45)

Pin	Con1
1	TX+
2	TX-
3	RX+
4	NC
5	NC
6	RX-
7	NC
8	NC

### CON3 (2 x 2 SMT in place of RJ45)

Pin	Function
1	TX+
2	TX-
3	RX+
4	RX-

### CON4 (2 x 4 pins in place of LEDs)

Pin	Function
1	+3.3V
2	+3.3V
3	DIAG (Red)
4	CH1 (Green)
5	+3.3V
6	+3.3V
7	CH2 (Yellow)
8	Link (Green)



For customers who also require the flexibility of also offering an 802.11 wireless solution, the pin-compatible WiMicro™ is available!

### Warranty

2-year limited warranty

### Ordering Information

Part Number	Description
M000AA002-01R	Micro100, No RJ45 connector, No LEDs, with TTL pin header, RoHS
M000AA0E2-01R	AES Encrypted Micro100, No RJ45 connector, No LEDs, with TTL pin header, RoHS
M011AA002-01R	Micro100 with RJ45 connector, LEDs, with TTL pin header, RoHS
M011AA0E2-01R	AES Encrypted Micro100 with RJ45 connector, LEDs, with TTL pin header, RoHS
M022AA002-01R	Micro100, Pin header for Ethernet, Pin header for LED connection, with TTL pin header, RoHS
M022AA0E2-01R	AES Encrypted Micro100, Pin header for Ethernet, Pin header for LED connection, with TTL pin header, RoHS



15353 Barranca Parkway | Irvine | CA 92618 | USA | Tel: 800.526.8764 | Fax: 949.450.7249 | [www.lantronix.com](http://www.lantronix.com)

©2006, Lantronix, Inc. Lantronix is a registered trademark and WiMicro and Device Server are trademarks of Lantronix, Inc. All other trademarks are the property of their respective owners. Specifications subject to change without notice. All rights reserved. 910-417 05/06 DGS2500