


Wirewound Rheostat/Potentiometer




FEATURES

- 100 W at 25 °C
- 70 W at 25 °C
- CCTU 05-03B (PA5)
- Vitreous style
- Compliant to RoHS directive 2002/95/EC


RoHS
COMPLIANT

DIMENSIONS in millimeters

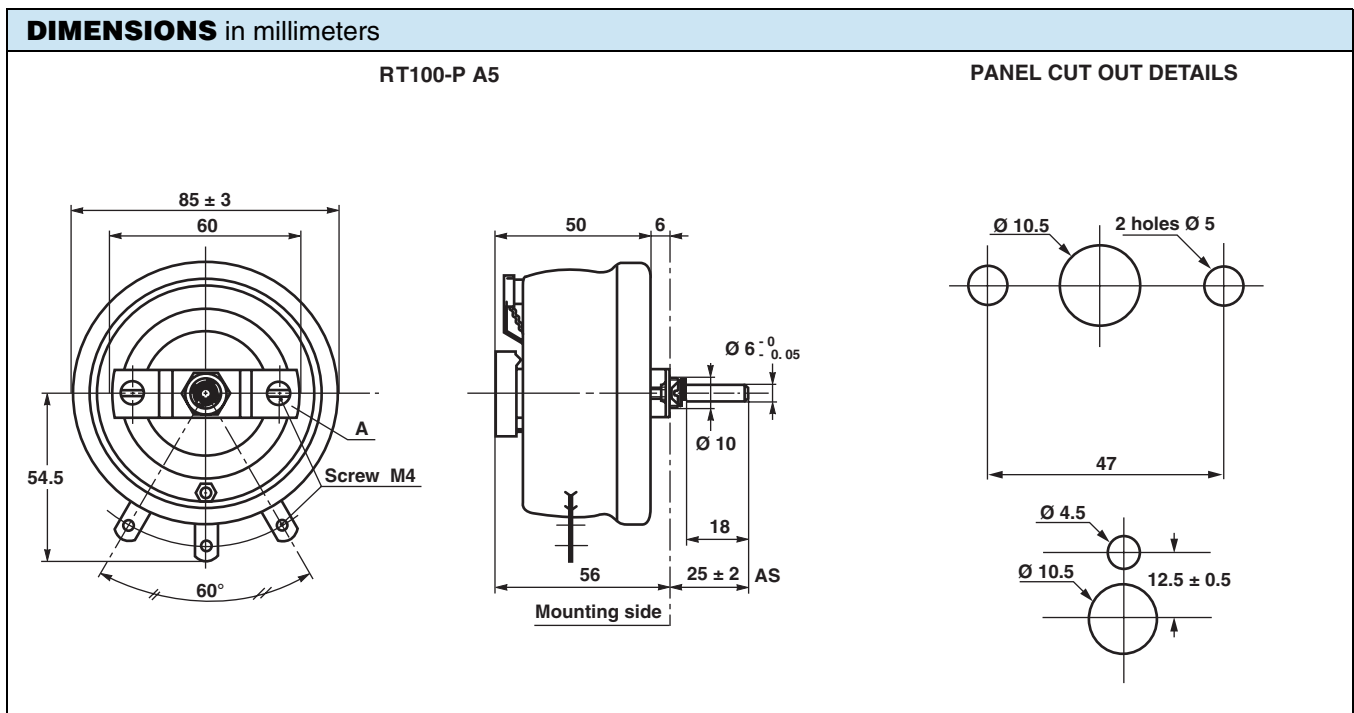

MECHANICAL SPECIFICATIONS

| | |
|------------------------------|-----------------|
| Mechanical Protection | Vitreous |
| Mechanical Travel | 300° ± 5° |
| Operating Torque | 4 Ncm to 20 Ncm |
| End Stop Torque | 100 Ncm |
| Unit Weight | 400 g |

ENVIRONMENTAL SPECIFICATIONS

| | |
|--------------------------|---------------------------|
| Temperature Range | - 55 °C + 320 °C |
| Climatic Category | CCTU 454 CEI 55/200/56 |

ELECTRICAL SPECIFICATIONS

| | | | | | |
|---------------------------------|--|-----------------|--------|-------------------|-------------------|
| Ohmic Range | 1 Ω to 15 kΩ | | | | |
| Tolerance Standard | ± 10 % | | | | |
| Power Rating | 100 W at 25 °C | | | | |
| Variation Law | <table border="0"> <tr> <td>Standard</td> <td>Linear</td> </tr> <tr> <td>On request</td> <td>Sectorial winding</td> </tr> </table> | Standard | Linear | On request | Sectorial winding |
| Standard | Linear | | | | |
| On request | Sectorial winding | | | | |
| Limiting Element Voltage | 850 V | | | | |
| Dielectric Strength | 1500 V _{RMS} | | | | |
| Insulation Resistance | 10 ³ MΩ (500 V _{CC}) | | | | |


LOCKING DEVICE

Supplied as an option the spindle locking device can only be fitted to units with control mounting and locating peg.

The part A is removed (see drawing).

The available spindle length is according to the panel thickness.

Order reference: DBA6

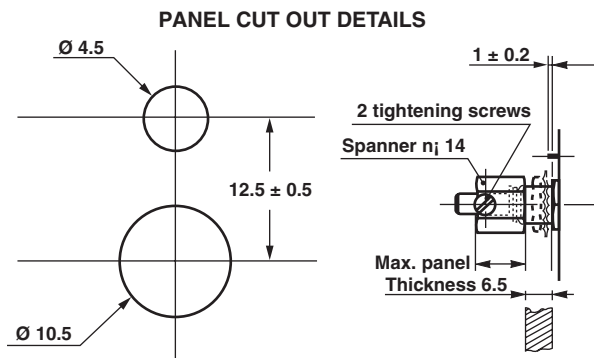


| PARTICULAR CHARACTERISTICS | | |
|----------------------------|---------------------------|----------------------------------|
| NOMINAL RESISTANCE Ω | MAX. SERVICE VOLTAGE V | MAX. CURRENT THROUGH WIPER mA |
| 1 | 10 | 10 |
| 1.5 | 12.2 | 8.16 |
| 2.2 | 14.8 | 6.74 |
| 3.3 | 18.2 | 5.50 |
| 4.7 | 21.7 | 4.61 |
| 6.8 | 26.1 | 3.84 |
| 10 | 31.6 | 3.16 |
| 15 | 38.7 | 2.58 |
| 22 | 46.9 | 2.13 |
| 33 | 57.4 | 1.74 |
| 47 | 68.6 | 1.46 |
| 68 | 82.5 | 1.2 |
| 100 | 100 | 1 |
| 150 | 122 | 0.816 |
| 220 | 148 | 0.674 |
| 330 | 182 | 0.550 |
| 470 | 217 | 0.461 |
| 680 | 261 | 0.384 |
| 1K | 316 | 0.316 |
| 1.5K | 387 | 0.258 |
| 2.2K | 469 | 0.213 |
| 3.3K | 574 | 0.174 |
| 4.7K | 686 | 0.146 |
| 6.8K | 825 | 0.121 |
| 10K | 850 | 0.085 |
| 15K | 850 | 0.057 |


| SPINDLES | | | |
|----------|-------------------------------|-------------------|------|
| Ø mm | DISTANCE TO MOUNTING PLATE mm | SCREW DRIVER SLOT | CODE |
| 6 | 22 | Without | AD |
| | | With | ADF |
| 6 | 25 | With | ASF |
| | | Without | AL |
| 6 | 50 | Without | AS |

For any special requirement on request: spindle flats, etc. Please supply detailed drawing.

COMMAND KNOB 41JF (OPTION)

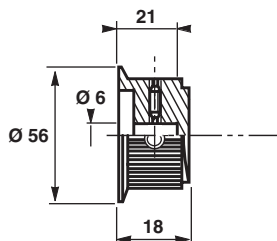

DIAL CG78 (OPTION)

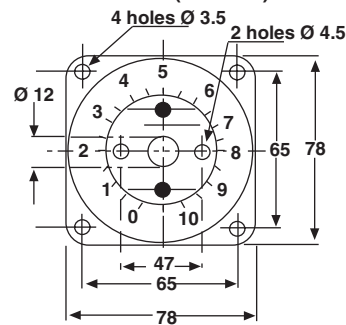

MARKING

Vishay Sfernice trademark, series, style, ohmic value (in Ω or kΩ), tolerance (in %), maximum current in A, manufacturing date



| ORDERING INFORMATION | | | | | | |
|----------------------|-------|---------|-------------|-----------|-----------|----------------|
| RT | 100 | AL | 6801 | K | B | XXX |
| MODEL | STYLE | SPINDLE | OHMIC VALUE | TOLERANCE | PACKAGING | SPECIAL DESIGN |

| GLOBAL PART NUMBER INFORMATION | | | | | | | | | | | | | | | | | | | | | |
|---|------|-----------------------|--|---|---|---|---------------------|----------------|----------------------------|---|---|---|---|---|---|---|---|---|---|---|---|
| <table border="1" style="margin: auto;"> <tr> <td>R</td><td>T</td><td>1</td><td>0</td><td>0</td><td>A</td><td>S</td><td>2</td><td>2</td><td>R</td><td>0</td><td>K</td><td>B</td> </tr> </table> | | | | | | | | | R | T | 1 | 0 | 0 | A | S | 2 | 2 | R | 0 | K | B |
| R | T | 1 | 0 | 0 | A | S | 2 | 2 | R | 0 | K | B | | | | | | | | | |
| GLOBAL MODEL | SIZE | LOCKING DEVICE (OPT.) | WINDING (OPT.) | COMMAND SHAFT | OHMIC VALUE | | TOLERANCE | PACKAGING | SPECIAL | | | | | | | | | | | | |
| RT | 100 | D | BXXX or BXXXX As applicable xxx(x) = Internal number | AS = Standard (Diam: 6 mm) AL ASF AD ADF | <p>The first three digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point.</p> <p>2002 = 20 kΩ 4700 = 470 Ω 22R0 = 22 Ω 0R01 = 0.01 Ω</p> | | J = 5 % K = 10 % | B = Box BO1 | As applicable Ex = DXxx | | | | | | | | | | | | |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.