


1/2" (12.7 mm) Conductive Plastic and Cermet Potentiometers

FEATURES

- Robust construction
- High rotational life (50 000 cycles)
- Up to three sections PC support plates
- Rotary switches and solder lug terminals available
- Compliant to RoHS directive 2002/95/EC since date code 0414



RoHS
COMPLIANT

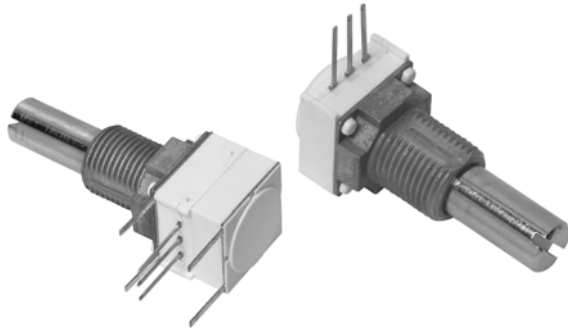


148 FEATURES


- Conductive plastic element
- Quiet electrical output

149 FEATURES

- Cermet element
- Low temperature coefficient (± 150 ppm/ $^{\circ}$ C)

DIMENSIONS in inches (millimeters) ± 0.02 (± 0.5)

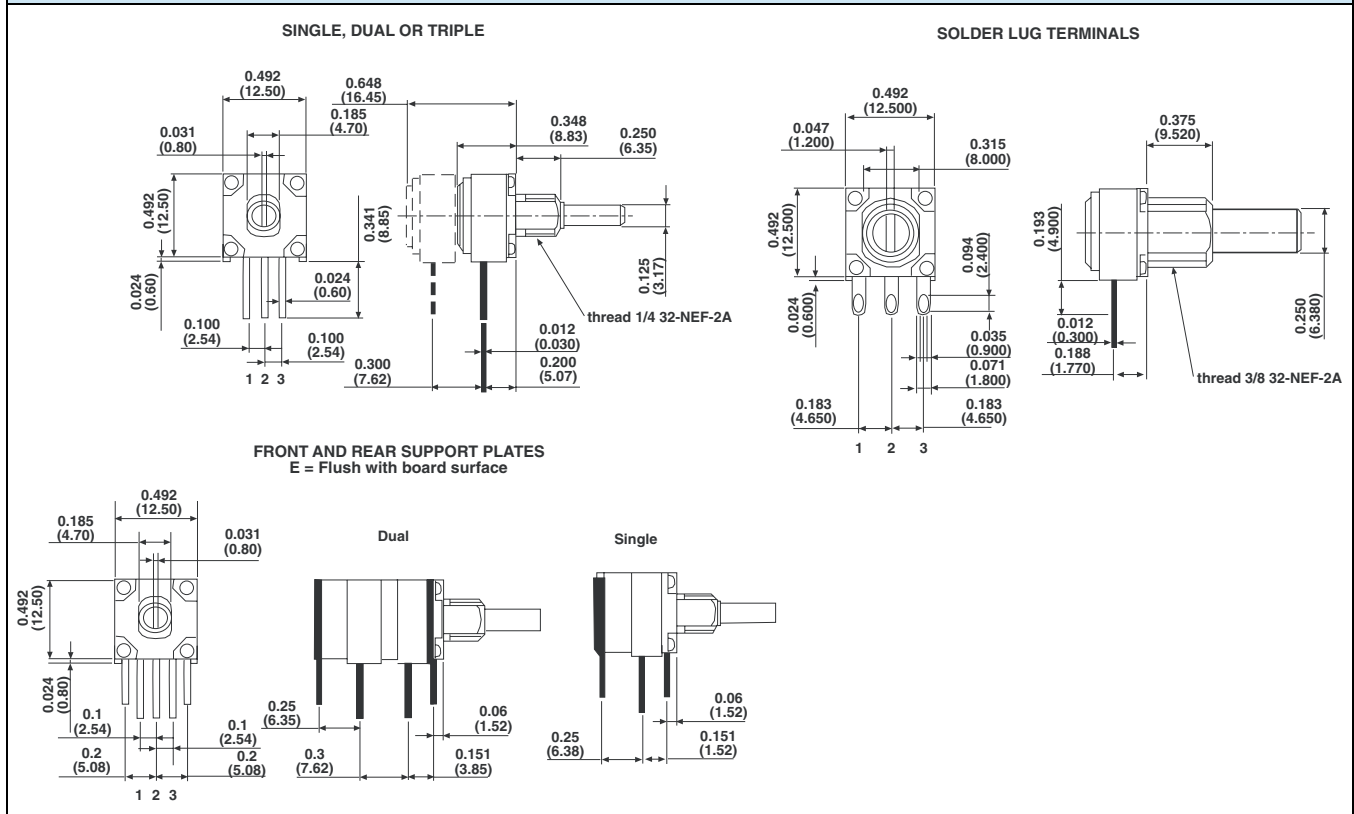

| ELECTRICAL SPECIFICATIONS | | |
|------------------------------------|------------|--|
| PARAMETER | | |
| | | 148 |
| | | 149 |
| Resistance Range | Linear | 1 k Ω to 1 M Ω |
| | Non-Linear | 500 Ω to 500 k Ω |
| Tolerance | Linear | 10 % |
| | Non-Linear | 20 % on request 10 % |
| Linearity (Typical) | | ± 5 % independent |
| End Resistance | | 4 Ω maximum each end |
| Power Rating | | 0.5 W at 70 °C 0 W at 120 °C |
| | | 1 W at 70 °C 0 W at 150 °C |
| | | Non-Linear or PC mount, derate 50 % |
| Circuit Diagram | |  |
| Effective Rotation | | 270° \pm 10° without rotary switch 240° \pm 10° with rotary switch |
| Contact Resistance Variation | | 1.5 % of total resistance |
| | | 3 % of total resistance |
| Maximum Continuous Working Voltage | | 350 V _{AC} across end terminals, but within power rating |
| Dielectric Withstanding Voltage | | Sea Level - 750 V _{AC} |


| MECHANICAL SPECIFICATIONS | | |
|----------------------------------|---------------------|---|
| Mechanical Travel | | 300° \pm 5° |
| Operating Torque (Typical) | | Single section 0.2 to 3.0 oz. - in dual or triple section 0.3 to 4.5 oz.-in |
| End Stop Torque | Bushing A and B | 2.1 in-lbs max. |
| | Bushing F | 6.8 in-lbs max. |
| Weight (approx.) | Single | 0.19 oz. |
| | Dual | 0.27 oz. |
| | Triple | 0.35 oz. |
| Terminals | Electrical Elements | e3: Pure Sn |
| | Switch Elements | e4: Gold plated |

| ENVIRONMENTAL SPECIFICATIONS | | |
|--|---|---|
| | 148 | 149 |
| Operating Temperature | - 40 °C to + 120 °C | - 40 °C to + 125 °C |
| Storage Temperature | - 55 °C to + 120 °C | - 55 °C to + 150 °C |
| Temperature Cycling (5 Cycles) | - 40 °C to + 120 °C (4 % ΔR_T) | - 40 °C to + 150 °C (3 % ΔR_T) |
| Load Life (1000 h Rated Load at 70 °C) | 10 % ΔR_T | 5 % ΔR_T |
| Rotational Load Life | | 50 000 cycles |
| TCR (Typical) | ± 500 ppm/°C | ± 150 ppm/°C |
| Sealing | | IP64 |

LOCATING PEGS (Anti-Rotation Lug)

The locating peg is provided by a plate mounted on the bushing and positioned by the module sides. Four set positions are available, clock face orientation: 12, 3, 6, 9.


All 148, 149 bushings have a double flat. When panel mounting holes have been punched accordingly, an anti-rotation lug is not necessary.

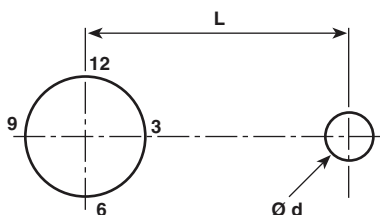

| CODE | VERSION | BUSHING A, B | BUSHING F | EFFECTIVE HIGH PEG |
|------|---------|--------------|-----------|--------------------|
| A | Ø d mm | 2 | 2 | 0.7 |
| | L mm | 6.2 | 6.2 | - |
| B | Ø d mm | 2 | 2 | 0.7 |
| | L mm | 7.75 | 7.75 | - |
| C | Ø d mm | - | 3.5 | 1.1 |
| | L mm | - | 13.5 | - |

Locating pegs are supplied in separate bags with nuts and washers

RSID OPTION: ROTARY SWITCH MODULES

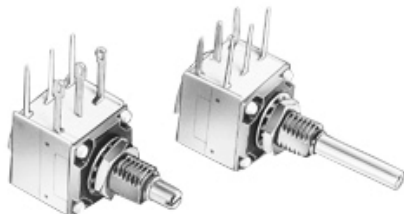

- Rotary switches
- Current up to 2 A
- SPDT: Single pole, changeover switch in CCW position - 3 pins

MODULES: RS ON/OFF SWITCH RSI CHANGEOVER SWITCH

The position of each module is free. RS and RSI rotary switches are housed in a standard 148, 149 module size 12.7 mm x 12.7 mm x 5.08 mm (0.5" x 0.5" x 0.2"). They have the same terminal styles as the assembled electrical modules.

An assembly can comprise 1 or more switch modules.

Switch actuation is described as seen from the shaft end.

D: means actuation in maximum CCW position

The switch actuation travel is 25° with a total mechanical travel of 300° ± 5° and electrical travel of electrical module is 238° ± 10°.


RSID SINGLE POLE CHANGEOVER

In full CCW position, the contact is made between 3 and 2 and open between 3 and 1. Switch actuation (CW direction) reverses these positions.

SWITCH SPECIFICATIONS

| | | |
|--|--------------------------------|-----------------------|
| Switching Power Maximum | 62.5 VA v 15 VA = | |
| Switching Current Maximum | 0.25 A 250 V v 0.5 A 30 V = | |
| Maximum Current Through Element | 2 A | |
| Contact Resistance | 30 mΩ | |
| Dielectric Strength | Terminal to Terminal | 1000 V _{RMS} |
| | Terminal to Bushing | 2000 V _{RMS} |
| Maximum Voltage Operation | 250 V v 30 V = | |
| Insulation Resistance Between Contacts | 10 ⁶ MΩ | |
| Life at P _{max} . | 10 000 actuations | |
| Minimal Travel | 25° | |
| Operating Temperature | - 40 °C to + 85 °C | |

ELECTRICAL DIAGRAM




- Note**
- Common



1/2" (12.7 mm) Conductive Plastic and Cermet Potentiometers

Vishay Spectrol

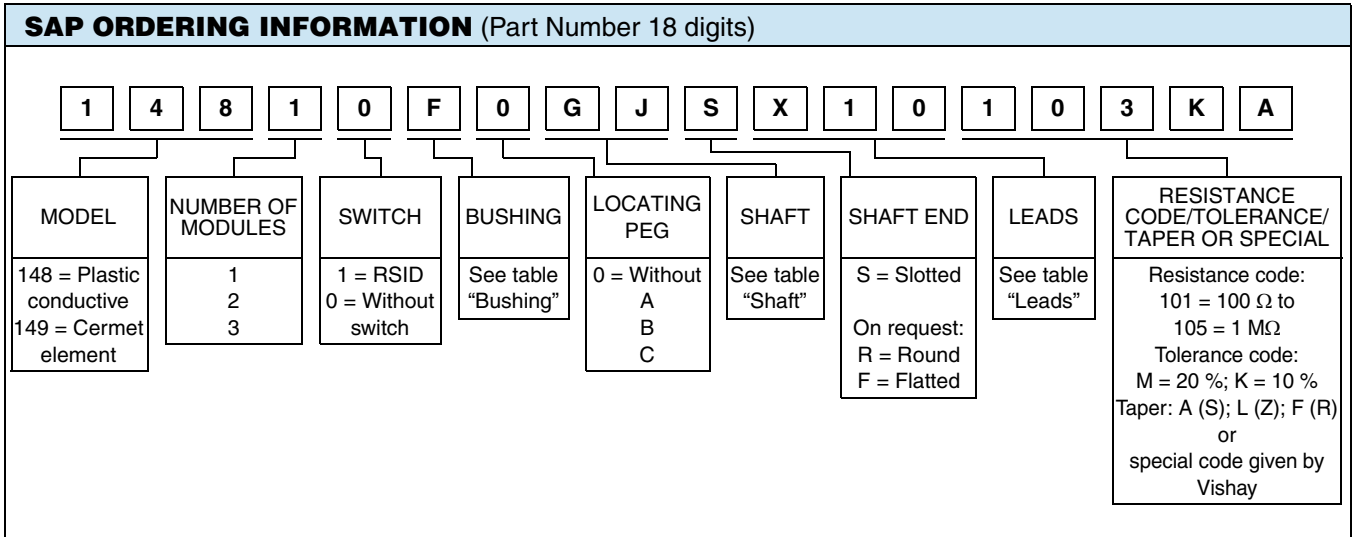

| BUSHING | | | |
|---------|------|------|-----------|
| | Φ | L | OLD CODES |
| A | 1/4" | 1/4" | N |
| B | 1/4" | 3/8" | J |
| F | 3/8" | 3/8" | G |

| SHAFT | | | |
|-------|------|--------|-----------|
| | Φ | L | OLD CODES |
| BB | 1/8" | 1/2" | 32 |
| BG | 1/8" | 5/8" | 40 |
| BH | 1/8" | 3/4" | 48 |
| BJ | 1/8" | 7/8" | 56 |
| GB | 1/4" | 1/2" | 32 |
| GG | 1/4" | 5/8" | 40 |
| GH | 1/4" | 3/4" | 48 |
| GJ | 1/4" | 7/8" | 56 |
| GL | 1/4" | 1" | 64 |
| GN | 1/4" | 1 1/4" | 80 |

| LEADS | | | | |
|-------|-----------------------------|------------------|-----------------------|-----------|
| | TYPE | PIN SPACING | SPACE BETWEEN MODULES | OLD CODES |
| X10 | PCB pins | 2.54 mm (0.100") | N/a | P |
| X13 | | | 7.62 mm (0.300") | |
| A10 | PCB pins and support plates | 2.54 mm (0.100") | N/a | E |
| A13 | | | 7.62 mm (0.300") | |
| Y00 | Sold, lugs | 4.65 mm (0.183") | N/a | S |
| Y03 | | | 7.62 mm (0.300") | |

| PART NUMBER DESCRIPTION (for information only) | | | | | | | | | | | | | | |
|--|---------|--------|---------|--------------|-------|-------|-------|-------|-------|------|-------|---------|---------|-------------|
| 148 | 1 | 0 | F | 0 | GJ | S | X10 | BO50 | 10K | 10 % | A | | | e3 |
| MODEL | MODULES | SWITCH | BUSHING | LOCATING PEG | SHAFT | SHAFT | LEADS | PACK. | VALUE | TOL. | TAPER | SPECIAL | SPECIAL | LEAD FINISH |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.