




(2,00mm) .0787"

TCMD SERIES

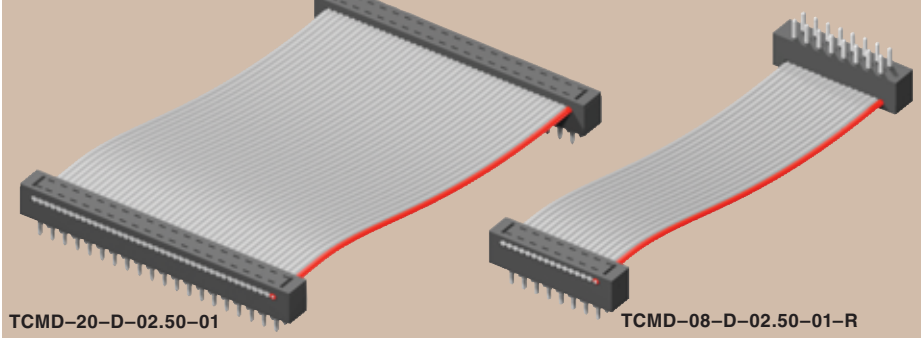

HIGH RELIABILITY IDC HEADER CABLE

Mates with:
SMM*, MMS*

SPECIFICATIONS

For complete specifications see www.samtec.com?TCMD

Insulator Material:

Black Glass Filled Polyester



Terminal:

Phosphor Bronze

Plating:

Sn over 50µ" (1,27µm) Ni

Wire:

28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator

Current Rating:

1A

Operating Temp Range:

-40°C to +105°C

RoHS Compliant:







Yes

TYPE STRIP	NO. PINS PER ROW	END OPTION	OVERALL LENGTH	01	TRANSFER OPTION	OTHER OPTION
------------	------------------	------------	----------------	----	-----------------	--------------

-05, -08, -10, -12, -13, -15, -17, -20, -22, -25
(Call for other sizes)

- "XX.XX"
= Assembled Length
Assembled Length in INCHES (±1/8")
2 inches minimum

Leave blank for -S and -D End Options. For -T End Option Specify "-N" (Socket has notch polarization)

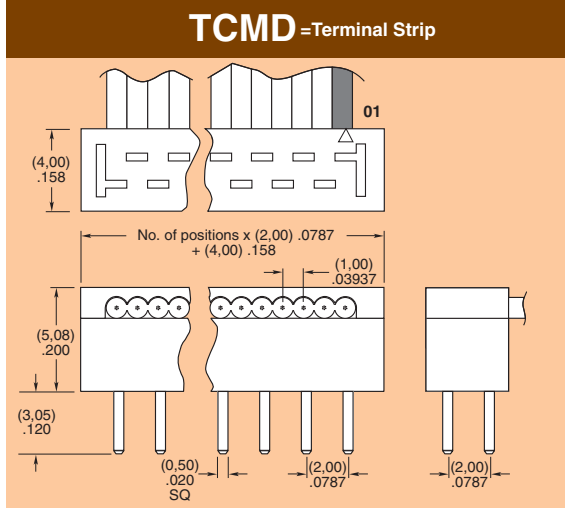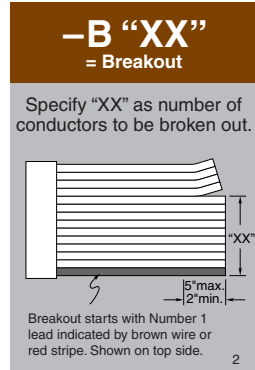

*Note: Standard TCMD callout will not mate with SMM, MMS. Must use gold plated callouts. (See drawing on web.) When mated with a socket, Wire 1 mates with Pin 2; Wire 2 mates with Pin 1, etc.

Note: TCMD Series assemblies are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM