


- Designed for Complementary Use with BDW94, BDW94A, BDW94B and BDW94C
- 80 W at 25°C Case Temperature
- 12 A Continuous Collector Current
- Minimum  $h_{FE}$  of 750 at 3V, 5 A

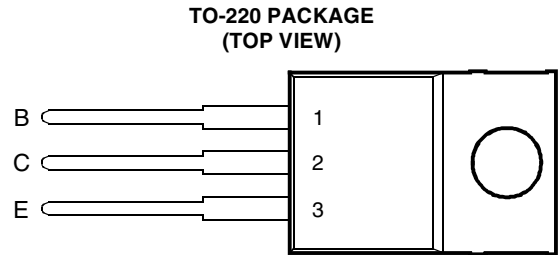

Pin 2 is in electrical contact with the mounting base.

MDTRACA

**absolute maximum ratings at 25°C case temperature (unless otherwise noted)**

RATING		SYMBOL	VALUE	UNIT
Collector-base voltage ( $I_E = 0$ )	BDW93	$V_{CBO}$	45	V
	BDW93A		60	
	BDW93B		80	
	BDW93C		100	
Collector-emitter voltage ( $I_B = 0$ )	BDW93	$V_{CEO}$	45	V
	BDW93A		60	
	BDW93B		80	
	BDW93C		100	
Emitter-base voltage		$V_{EBO}$	5	V
Continuous collector current		$I_C$	12	A
Continuous base current		$I_B$	0.3	A
Continuous device dissipation at (or below) 25°C case temperature (see Note 1)		$P_{tot}$	80	W
Continuous device dissipation at (or below) 25°C free air temperature (see Note 2)		$P_{tot}$	2	W
Operating junction temperature range		$T_j$	-65 to +150	°C
Storage temperature range		$T_{stg}$	-65 to +150	°C
Operating free-air temperature range		$T_A$	-65 to +150	°C

NOTES: 1. Derate linearly to 150°C case temperature at the rate of 0.64 W/°C.  
2. Derate linearly to 150°C free air temperature at the rate of 16 mW/°C.

**PRODUCT INFORMATION**

SEPTEMBER 1993 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.

**electrical characteristics at 25°C case temperature (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{(BR)CEO}$ Collector-emitter breakdown voltage	$I_C = 100 \text{ mA}$ $I_B = 0$ (see Note 3)	BDW93 45 BDW93A 60 BDW93B 80 BDW93C 100			V
$I_{CEO}$ Collector-emitter cut-off current	$V_{CB} = 40 \text{ V}$ $I_B = 0$ $V_{CB} = 60 \text{ V}$ $I_B = 0$ $V_{CB} = 80 \text{ V}$ $I_B = 0$ $V_{CB} = 80 \text{ V}$ $I_B = 0$	BDW93 BDW93A BDW93B BDW93C		1 1 1 1	mA
$I_{CBO}$ Collector cut-off current	$V_{CB} = 45 \text{ V}$ $I_E = 0$ $V_{CB} = 60 \text{ V}$ $I_E = 0$ $V_{CB} = 80 \text{ V}$ $I_E = 0$ $V_{CB} = 100 \text{ V}$ $I_E = 0$ $V_{CB} = 45 \text{ V}$ $I_E = 0$ $T_C = 150^\circ\text{C}$ $V_{CB} = 60 \text{ V}$ $I_E = 0$ $T_C = 150^\circ\text{C}$ $V_{CB} = 80 \text{ V}$ $I_E = 0$ $T_C = 150^\circ\text{C}$ $V_{CB} = 100 \text{ V}$ $I_E = 0$ $T_C = 150^\circ\text{C}$	BDW93 BDW93A BDW93B BDW93C BDW93 BDW93A BDW93B BDW93C		0.1 0.1 0.1 0.1 5 5 5 5	mA
$I_{EBO}$ Emitter cut-off current	$V_{EB} = 5 \text{ V}$ $I_C = 0$			2	mA
$h_{FE}$ Forward current transfer ratio	$V_{CE} = 3 \text{ V}$ $I_C = 3 \text{ A}$ $V_{CE} = 3 \text{ V}$ $I_C = 10 \text{ A}$ (see Notes 3 and 4) $V_{CE} = 3 \text{ V}$ $I_C = 5 \text{ A}$	1000 100 750		20000	
$V_{CE(sat)}$ Collector-emitter saturation voltage	$I_B = 20 \text{ mA}$ $I_C = 5 \text{ A}$ (see Notes 3 and 4) $I_B = 100 \text{ mA}$ $I_C = 10 \text{ A}$			2 3	V
$V_{BE(sat)}$ Base-emitter saturation voltage	$I_B = 20 \text{ mA}$ $I_C = 5 \text{ A}$ (see Notes 3 and 4) $I_B = 100 \text{ mA}$ $I_C = 10 \text{ A}$			2.5 4	V
$V_{EC}$ Parallel diode forward voltage	$I_E = 5 \text{ A}$ $I_B = 0$ $I_E = 10 \text{ A}$ $I_B = 0$			2 4	V

NOTES: 3. These parameters must be measured using pulse techniques,  $t_p = 300 \mu\text{s}$ , duty cycle  $\leq 2\%$ .

4. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

**thermal characteristics**


PARAMETER	MIN	TYP	MAX	UNIT
$R_{\theta JC}$ Junction to case thermal resistance			1.56	°C/W
$R_{\theta JA}$ Junction to free air thermal resistance			62.5	°C/W

**PRODUCT INFORMATION**

SEPTEMBER 1993 - REVISED SEPTEMBER 2002  
 Specifications are subject to change without notice.


**TYPICAL CHARACTERISTICS**

**TYPICAL DC CURRENT GAIN  
VS  
COLLECTOR CURRENT**

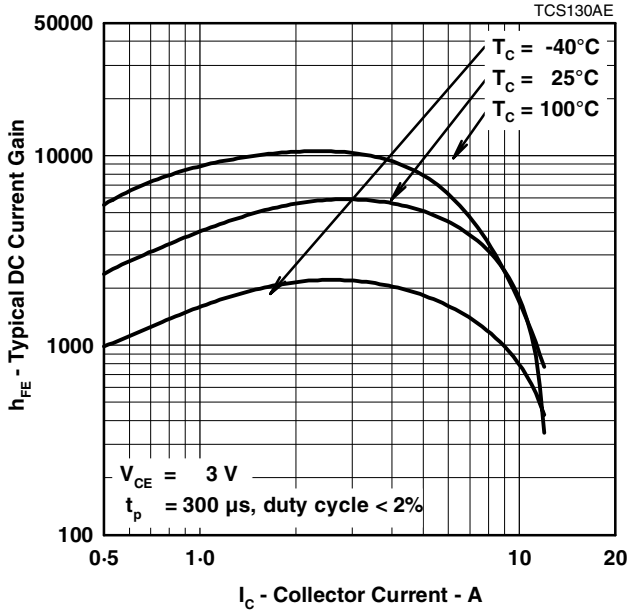


**Figure 1.**

**COLLECTOR-EMITTER SATURATION VOLTAGE  
VS  
COLLECTOR CURRENT**

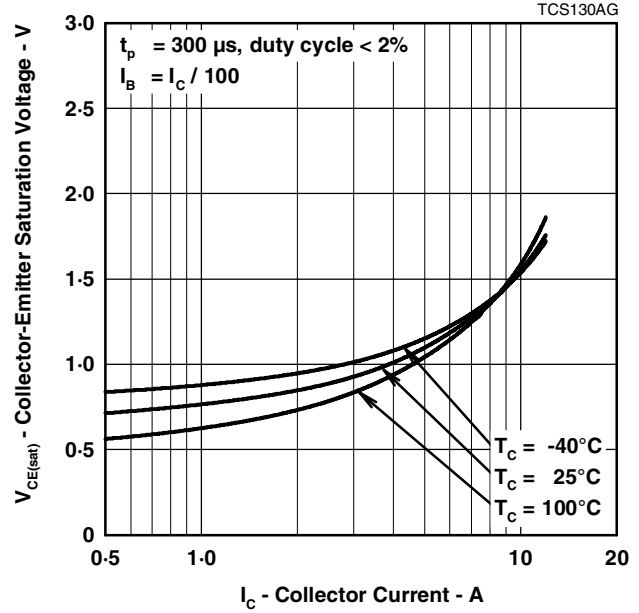

**Figure 2.**

**BASE-EMITTER SATURATION VOLTAGE  
VS  
COLLECTOR CURRENT**

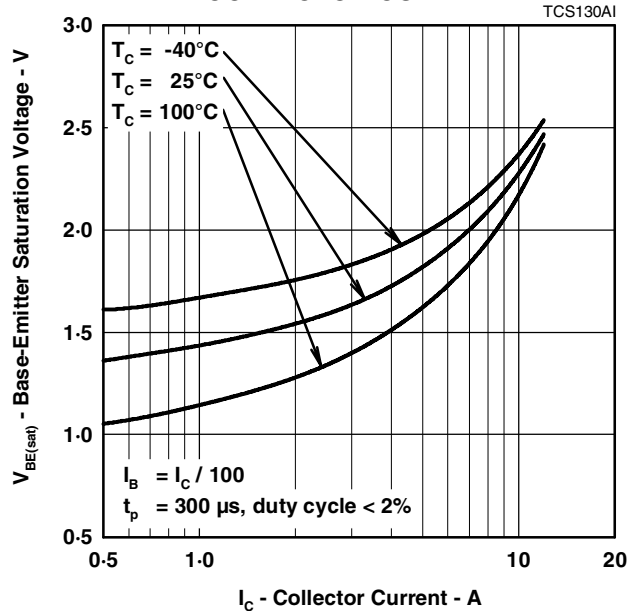

**Figure 3.**

**PRODUCT INFORMATION**

SEPTEMBER 1993 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.

**THERMAL INFORMATION**

**MAXIMUM POWER DISSIPATION  
VS  
CASE TEMPERATURE**

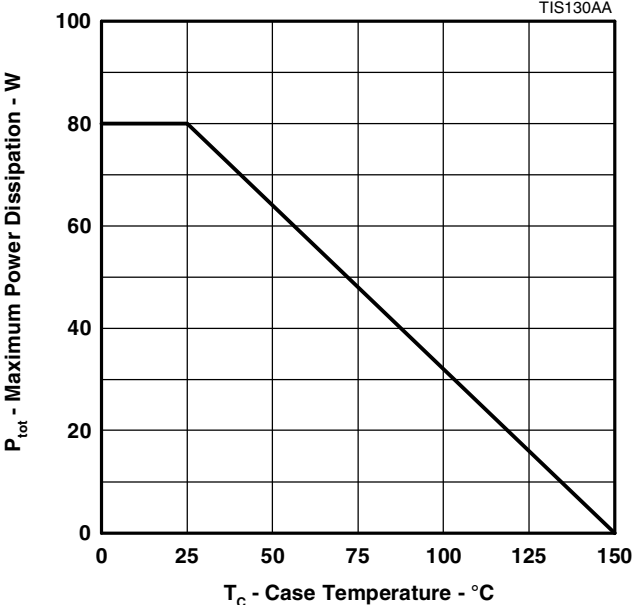


Figure 4.

**PRODUCT INFORMATION**

SEPTEMBER 1993 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.