
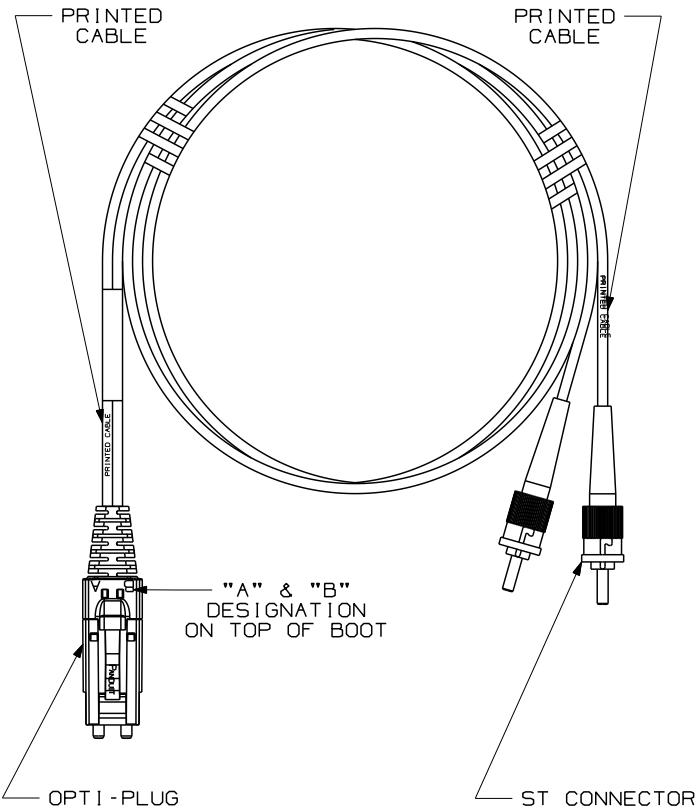


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.





NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITTEE.

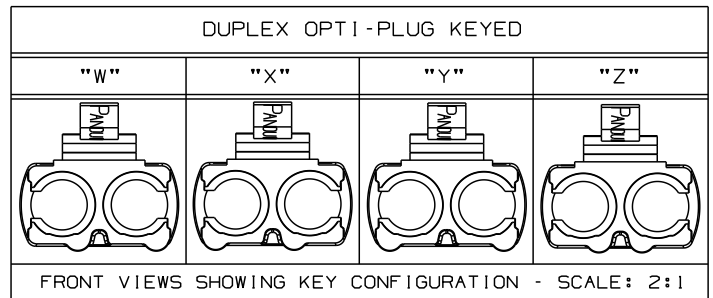

DUPLEX FIBER OPTIC PATCH CORD
OPTI-PLUG KEYED TO ST CONNECTOR CONFIGURATION
CUSTOMER DRAWING

										 PANDUIT ™ CORP. TINLEY PARK, ILL 60477					
										 THIRD ANGLE PROJECTION		ALL DIMENSIONS ARE GIVEN IN INCHES. UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ANGLES (.XX)		DRAWING FILENAME M02779BS_DC_00A.prt SCALE NONE	
										DRAWN BY MC		REVIEW DRAWING NUMBERS AS NOTED		PART NO. SEE TABLE, SHT. 2 DRAWING NO. 02779-23 (SHT. 1 of 2)	
										DATE 05-14-07		SIZE A			
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D					
R	06-06-07	MC		RELEASED TO PRODUCTION	02779-23										



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX OPTI-PLUG KEYED TO ST FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				OPTI-PLUG KEYED			ST CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	MIN. RL	COLOR	MAX. IL	MIN. RL	COLOR
F5D6PW-2M*Y "W"	RISER (OFNR)	50/125um OM2	DUPLEX 3.0mm ZIPCORD	ORANGE	0.30dB	20dB	BLACK	0.30dB	20dB	METALLIC FINISH
F6D6PW-2M*Y "W"		62.5/125um OM1		ORANGE	0.30dB	20dB	BLACK	0.30dB	20dB	METALLIC FINISH
F5D6PX-2M*Y "X"	RISER (OFNR)	50/125um OM2	DUPLEX 3.0mm ZIPCORD	ORANGE	0.30dB	20dB	RED	0.30dB	20dB	METALLIC FINISH
F6D6PX-2M*Y "X"		62.5/125um OM1		ORANGE	0.30dB	20dB	RED	0.30dB	20dB	METALLIC FINISH
F5D6PY-2M*Y "Y"	RISER (OFNR)	50/125um OM2	DUPLEX 3.0mm ZIPCORD	ORANGE	0.30dB	20dB	ORANGE	0.30dB	20dB	METALLIC FINISH
F6D6PY-2M*Y "Y"		62.5/125um OM1		ORANGE	0.30dB	20dB	ORANGE	0.30dB	20dB	METALLIC FINISH
F5D6PZ-2M*Y "Z"	RISER (OFNR)	50/125um OM2	DUPLEX 3.0mm ZIPCORD	ORANGE	0.30dB	20dB	YELLOW	0.30dB	20dB	METALLIC FINISH
F6D6PZ-2M*Y "Z"		62.5/125um OM1		ORANGE	0.30dB	20dB	YELLOW	0.30dB	20dB	METALLIC FINISH

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	06-06-07	MC		RELEASED TO PRODUCTION	02779-23				

DUPLEX FIBER OPTIC PATCH CORD OPTI-PLUG KEYED TO ST CONNECTOR CONFIGURATION CUSTOMER DRAWING									
					PANDUIT ™ CORP. TINLEY PARK, ILL 60477				
 THIRD ANGLE PROJECTION					ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) ± .010 (.0.3) (.XX) ± .03 (.0.8) ANGLES				
DRAWN BY MC					REVIEW DRAWING NUMBERS				
DATE 05-14-07					PART NO. SEE TABLE				
CHK'D					DRAWING NO. 02779-23 SIZE A				
AS NOTED					DRAWING FILENAME: M02779BS_DC_00A.prt SCALE: NONE				