


1. MATERIAL: ALNICO 5 SINTERED OR CAST
2. MAGNETIZATION LEVEL: SEE BELOW
3. MAGNETIZATION DIRECTION: PARALLEL TO LENGTH
4. DIMENSIONS: AS SHOWN
5. SQUARENESS: 1°
6. PACKING: PREFERRED METHOD IS SHRINK WRAPPED ON CARDBOARD FLATS; 100,500, OR 1000 PER FLAT; POLES ATTRACTING. OTHER METHODS MAY BE ACCEPTABLE WITH APPROVAL.

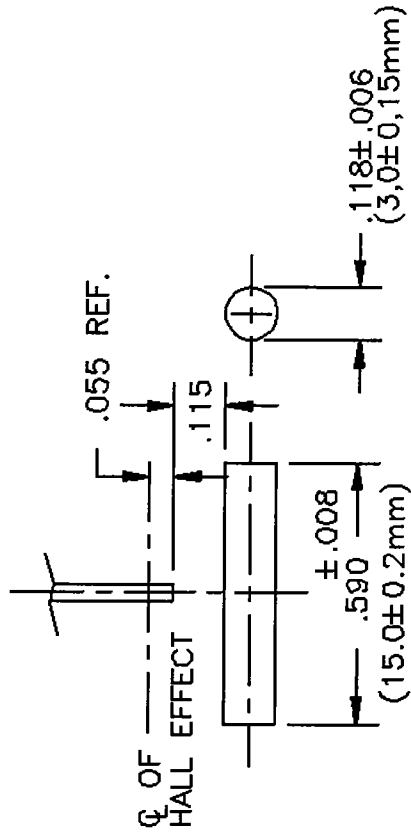

MAGNETIZATION LEVEL USING F.W. BELL METER 4048 AND TRANSVERSE PROBE #1706  
 100 GAUSS MINIMUM MEASURED AT THE MAGNETS CENTER AT AN AIR GAP OF .115"  
 PER ABOVE DRAWING. (TN-3931-C)

## 315 MAGNET

## H A M L I N, Inc.

DCR No. 9387

AC	ADD PACKAGING	A6860	JC	2/18/98	JC	2/18/98	Dwn.	GJ	DATE	2/15/84	DCR No.	9387
REV.	DESCRIPTION OF REVISION	DCR No.	BY	DATE	APP.	DATE	App'd	GJ	DATE	2/20/84	250-70-400	Page 1 of 1